
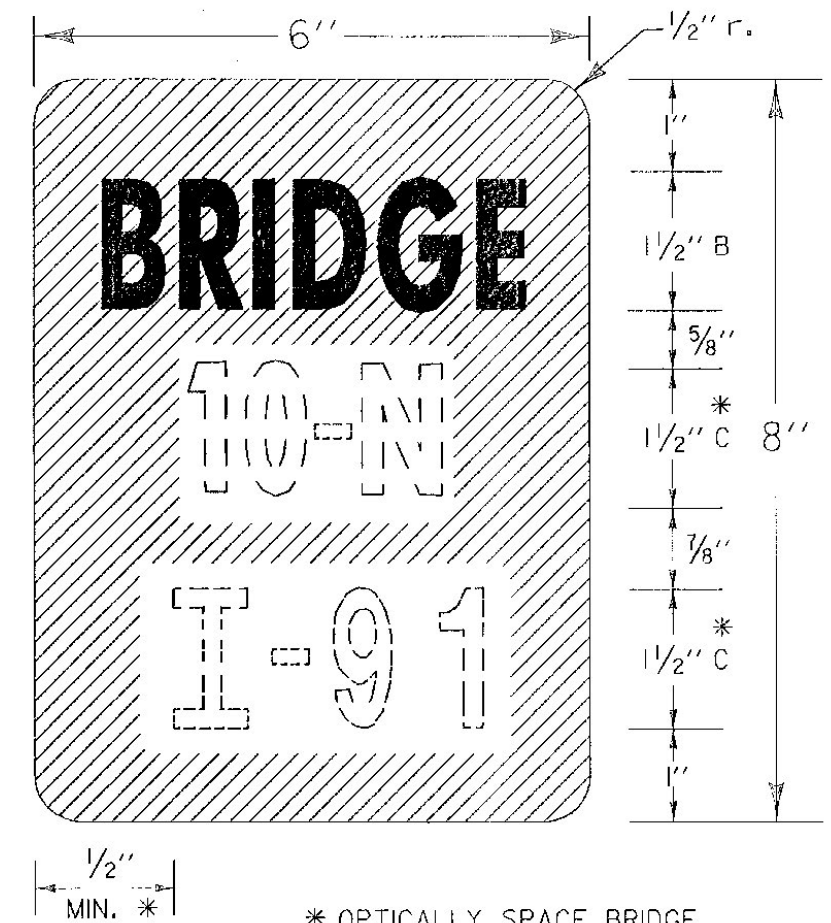


I-91  
 ← 2" →

HYPHENATED WORD DETAIL

ROUTE NUMBERS SHALL  
 APPEAR : FOR EXAMPLE AS :  
 I-91, US 5 , VT 22

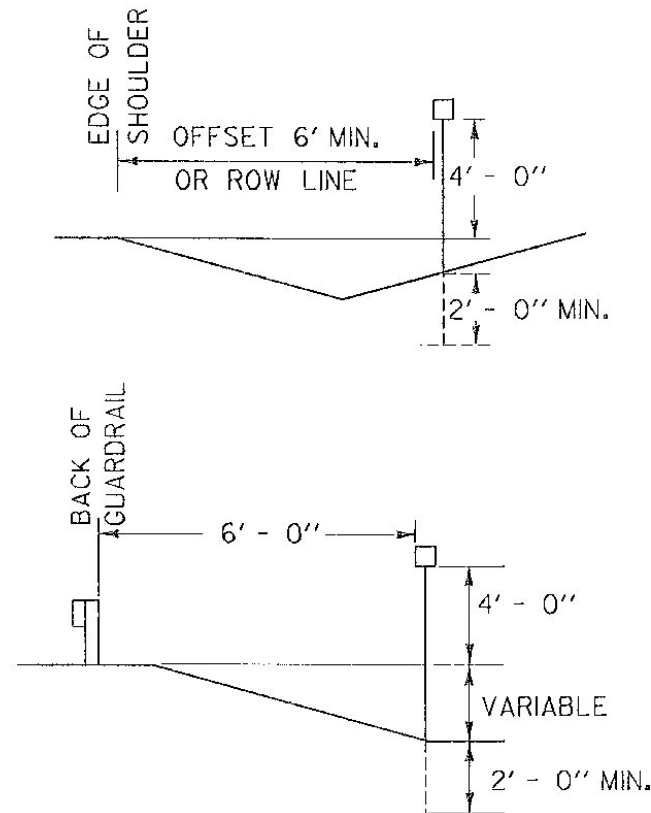

\* OPTICALLY SPACE BRIDGE  
 AND ROUTE NUMBERS.  
 SERIES B LETTERS MAY  
 BE USED TO MAINTAIN  
 VISUAL INTEGRITY.

NOTES

GENERAL:

DOTTED LINES AND NUMERALS INDICATE TEXT THAT VARIES.

PAYMENT:

MILEMARKERS SHALL BE PAID AS TRAFFIC SIGNS, TYPE "A", AND POSTS PAID AS FLANGED CHANNEL STEEL SIGN POSTS.

MATERIAL:

THE SIGN BASE MATERIAL SHALL BE 0.04 " FLAT SHEET ALUMINUM .

COLORS:

THE SIGN SHALL HAVE A REFLECTORIZED WHITE TEXT ON A REFLECTORIZED GREEN BACKGROUND. THE COLORS SHALL CONFORM WITH THOSE FOUND IN STANDARD COLOR TOLERANCE CHARTS AS APPROVED BY THE U.S. DEPARTMENT OF TRANSPORTATION, FEDERAL HIGHWAY ADMINISTRATION.

LETTERING:

LETTERS AND DIGITS SHALL CONFORM WITH THE STANDARD ALPHABETS FOR HIGHWAY SIGNS AS PRINTED BY THE FEDERAL HIGHWAY ADMINISTRATION.

POSTS:


FLANGED CHANNEL STEEL 2 #/FT. POSTS SHALL BE USED WHEN MILEMARKERS ARE INSTALLED BEHIND GUARDRAIL OR WHEN THE POST LENGTH EXCEEDS 7 FEET. FOR LENGTHS OF 7 FEET OR LESS, A 1.12 #/FT. STEEL SIGN POST SHALL BE USED.

REVISIONS AND CORRECTIONS

APPROVED

12/18/89  
 DATE  
*David B. Kelley*  
 CHIEF ENGINEER  
*Arthur J. Ross*  
 DIRECTOR OF PLANNING  
*Frederick S. MacArthur*  
 TRAFFIC AND SAFETY ENGINEER

BRIDGE NUMBER PLAQUE



STANDARD  
 E-134