



R9-5

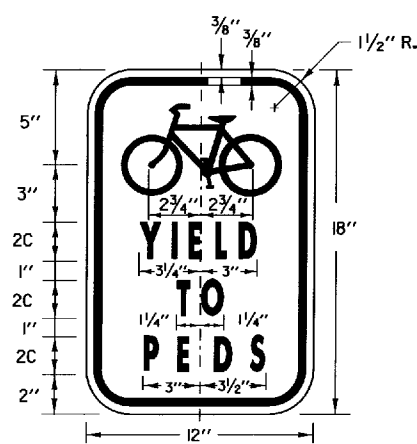


R9-6

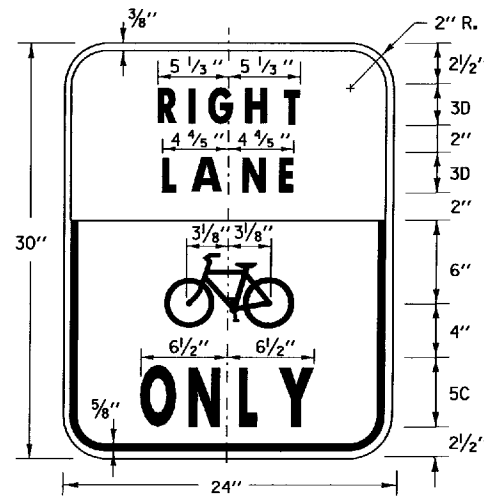


R3-17


COLORS: THE TOP OF THIS SIGN IS BLACK BACKGROUND WITH WHITE TEXT

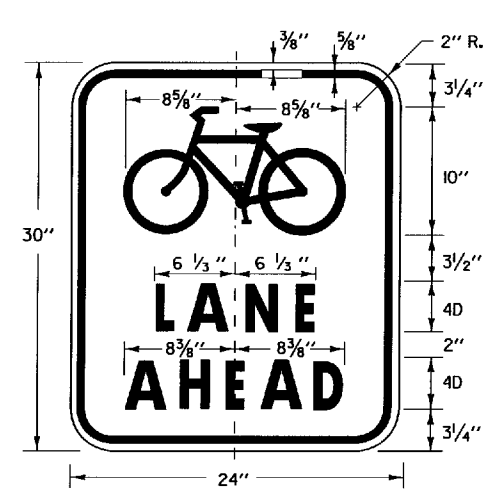

R3-16

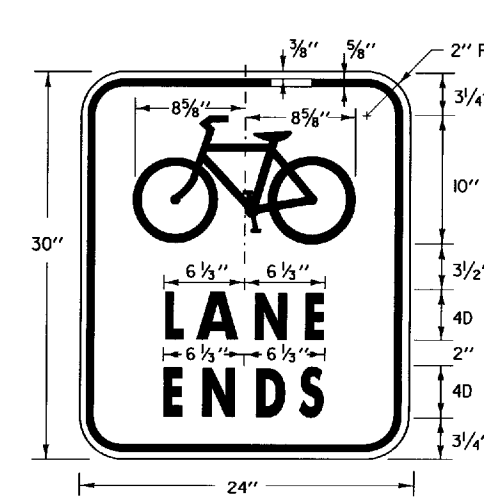


R3-16A

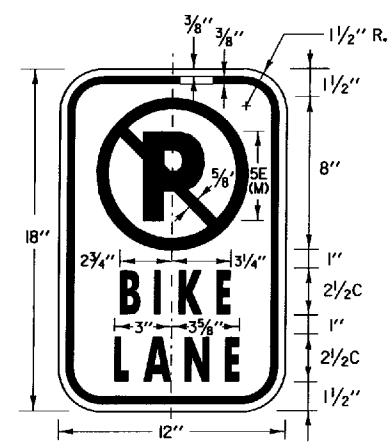


R7-9A

COLORS: LEGEND - BLACK BACKGROUND - WHITE LETTER P, BORDER - BLACK

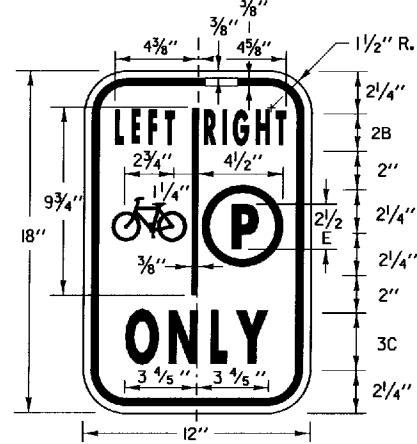


R3-17A

COLORS: LEGEND - BLACK BACKGROUND - WHITE (REFLECTIVE) CIRCLE - GREEN (REFLECTIVE)

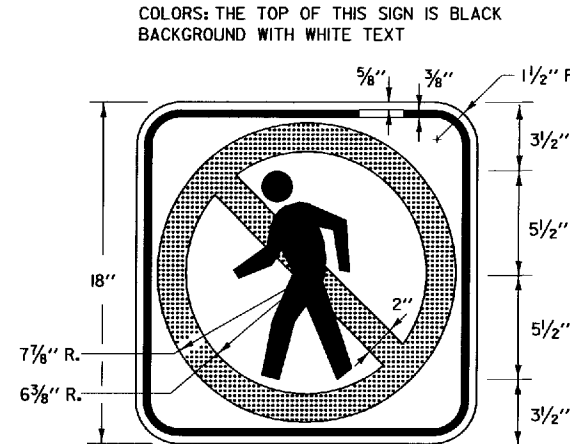


R9-3A

COLORS: CIRCLE AND DIAGONAL-RED SYMBOL AND BORDER - BLACK BACKGROUND - WHITE

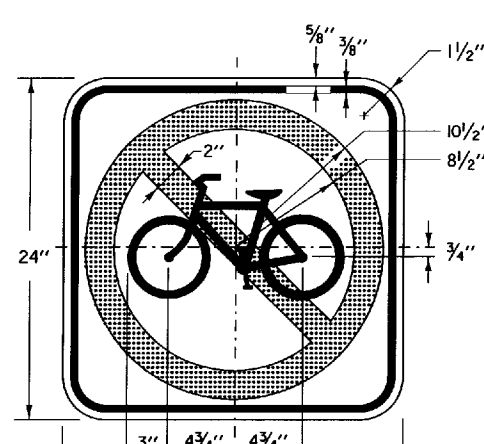


R5-6

COLORS: CIRCLE AND DIAGONAL-RED SYMBOL AND BORDER - BLACK BACKGROUND - WHITE

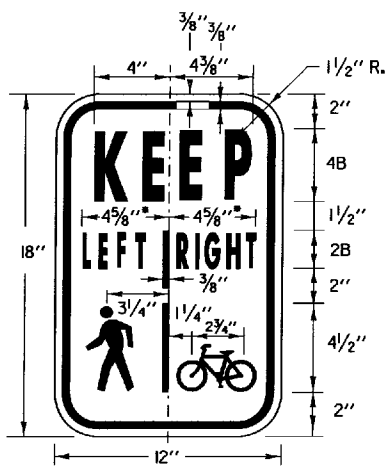


R9-7

• REDUCE LETTER SPACING 20%

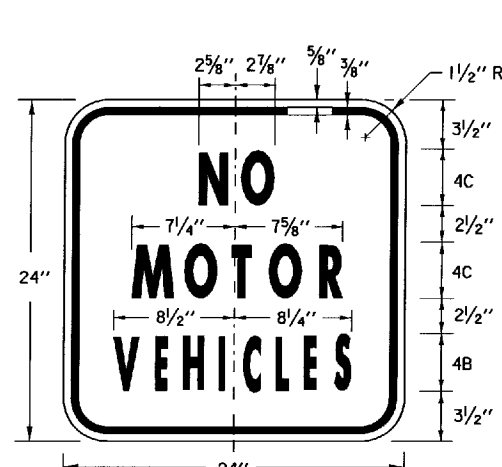

R5-3

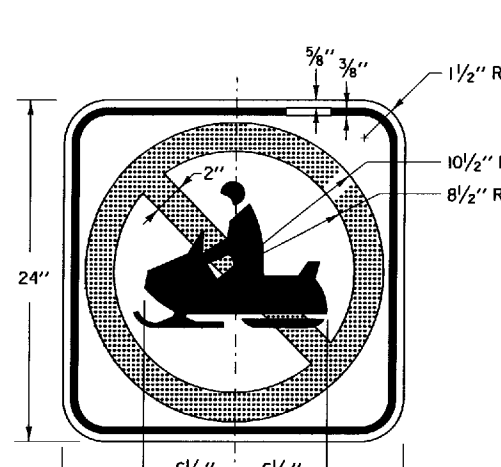

VR-565



R4-4

• REDUCE LETTER SPACING 20%
• OPTICALLY CENTER ARROW ON VERTICAL CENTERLINE

GENERAL
SEE STANDARD E-144 FOR ARROWHEAD DETAILS. SEE STANDARD E-152 FOR PEDESTRIAN DETAIL. SEE STANDARD E-153 FOR SNOWMOBILE DETAIL. SEE FHWA STANDARD HIGHWAY SIGN BOOK FOR BIKE DETAILS.

COLORS
THE REGULATORY SIGNS SHOWN ON THIS SHEET SHALL HAVE A REFLECTORIZED WHITE BACKGROUND WITH BLACK TEXT AND BORDER UNLESS OTHERWISE NOTED. THE COLORS SHALL CONFORM WITH THE COLORS ADOPTED BY AASHTO AND APPROVED BY THE FHWA.

MATERIALS
THE SIGN BASE MATERIALS USED FOR REGULATORY SIGNS SHOWN ON THIS SHEET MAY BE ANY OF THE FOLLOWING MINIMUM THICKNESSES NOTED:

	12" x 18"	24" x 24"	24" x 30"	36" x 30"
FLAT SHEET ALUMINUM	0.060"	0.080"	0.100"	
HIGH DENSITY OVERLAID PLYWOOD	1/2"	1/2"	5/8"	

THE REFLECTIVE MATERIAL SHALL BE ASTM TYPE III WHITE REFLECTIVE SHEETING APPLIED TO THE ENTIRE BACKGROUND OF THE SIGN. THE BLACK, RED OR GREEN PORTIONS OF THE SIGNS MAY BE LETTERING FILM OR SILK SCREENED.

SPECIFICATIONS
REGULATORY SIGNS SHALL MEET THE VERMONT STANDARD SPECIFICATIONS FOR TRAFFIC SIGNS AS DESCRIBED IN THE VAOT STANDARD SPECIFICATIONS FOR CONSTRUCTION.

TEXT DESIGN
LETTERS, DIGITS, ARROWS, SPACING AND TEXT DIMENSIONS SHALL CONFORM TO THE LATEST VERSION OF FHWA'S "STANDARD ALPHABETS FOR HIGHWAY SIGNS AND PAVEMENT MARKINGS". DETAILS SHALL CONFORM WITH THOSE DESCRIBED IN THE PUBLICATION "STANDARD HIGHWAY SIGNS" AS SPECIFIED IN THE MUTCD.


SUPERSEDED

OTHER STDS. REQUIRED: E-144, E-152, E-153

REVISIONS AND CORRECTIONS
DECEMBER 30, 2002 - DATE OF ORIGINAL ISSUE
OCTOBER 1, 2003 - MINOR DRAFTING CHANGES

APPROVED
DIRECTOR OF PROGRAM DEVELOPMENT
John A. Fair
TRAFFIC OPERATIONS ENGINEER
FEDERAL HIGHWAY ADMINISTRATION

REGULATORY SIGN
DETAILS



STANDARD
E-143B