




**4 - LANE HIGHWAY  
MEDIAN MAINTENANCE**

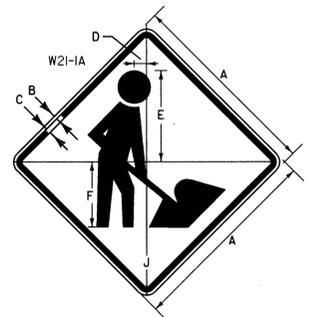


SIGN	DIMENSIONS (mm)						
	A	B	C	D	E	F	J
2 LANE	900	15	20	55	420	300	55
4 LANE	1200	20	30	75	560	400	75

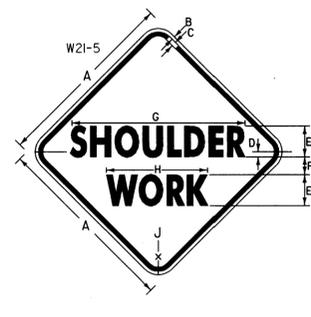

SIGN	DIMENSIONS (mm)									
	A	B	C	D	E	F	G	H	J	K
2 LANE	900	15	20	25	1250	85	866	456	55	
4 LANE	1200	20	30	25	1750	100	1015	535	75	

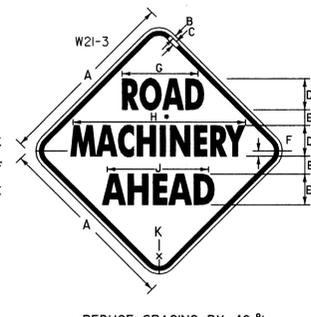


SIGN	DIMENSIONS (mm)										
	A	B	C	D	E	F	G	H	J	K	
2 LANE	900	15	20	1250	100	60	437	874	553	55	
4 LANE	1200	20	30	1750	125	85	613	1228	776	75	

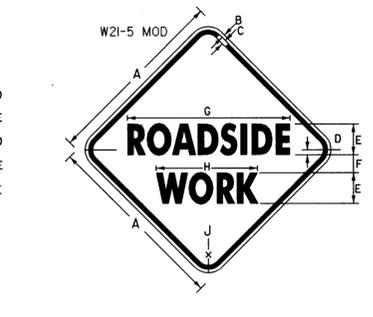


SIGN	DIMENSIONS (mm)									
	A	B	C	D	E	F	G	H	J	
2 LANE	900	15	20	10	1250	85	818	456	55	
4 LANE	1200	20	30	25	1750	100	948	535	75	


\* REDUCE SPACING BY 40 %

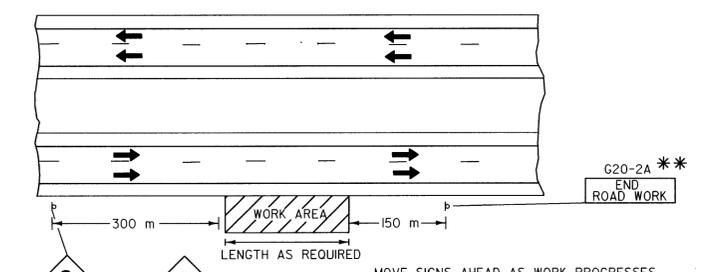


**4 - LANE HIGHWAY  
MAINTENANCE OUTSIDE SHOULDER**

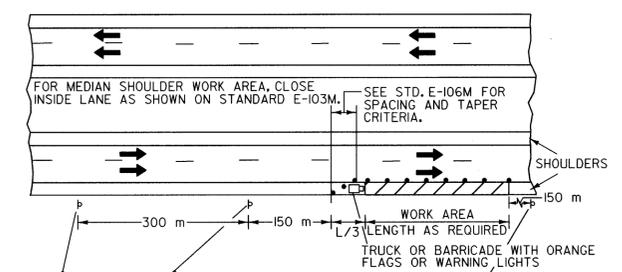

**4 - LANE DIVIDED HIGHWAY  
SHOULDER WORK AREA**

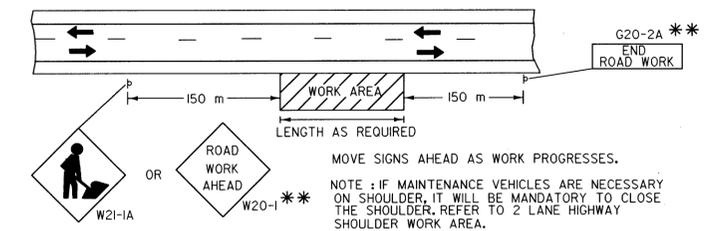

**2 - LANE HIGHWAY  
MAINTENANCE OUTSIDE SHOULDER**

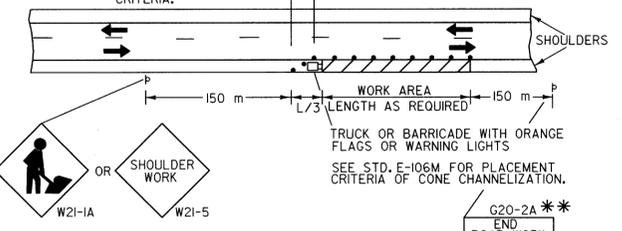

**2 - LANE HIGHWAY  
SHOULDER WORK AREA**

**NOTES:**

- REFLECTORIZATION:**  
ALL REFLECTIVE MATERIAL SHALL CONSIST OF ENCAPSULATED LENS REFLECTIVE SHEETING. THE TEXT AND BORDERS MAY BE SCREENED, LETTERING FILM OR HAND PAINTED.
  - COLORS:**  
THE WARNING SIGNS SHOWN ON THIS SHEET SHALL HAVE A BLACK TEXT AND BORDER ON A REFLECTORIZED ORANGE BACKGROUND. THE ORANGE SHALL CONFORM WITH THE STANDARD COLORS ADOPTED BY AASHTO AND APPROVED BY FHWA.
  - TEXT DESIGN:**  
LETTERS, SPACING AND TEXT DIMENSIONS SHALL CONFORM TO THE LATEST VERSION OF FHWA'S 'STANDARD ALPHABETS FOR HIGHWAY SIGNS AND PAVEMENT MARKINGS'.
  - SPECIFICATIONS:**  
WARNING SIGNS SHALL MEET THE STANDARD STATE SPECIFICATIONS FOR SIGNS AS PRESCRIBED IN THE VAOT STANDARD SPECIFICATIONS FOR CONSTRUCTION.
  - SIGN BASE MATERIAL:**  
THE SIGN BASE MATERIAL USED FOR THE WARNING SIGNS SHOWN ON THIS SHEET MAY BE OF ANY OF THE FOLLOWING, WITH MINIMUM THICKNESS AS NOTED:
- |                                    |         |           |
|------------------------------------|---------|-----------|
|                                    | 900X300 | 1200X1200 |
| (1) FLAT SHEET ALUMINUM            | 2.54 mm | 3.18 mm   |
| (2) HIGH DENSITY OVERLAYED PLYWOOD | 16 mm   | 19 mm     |
| (3) GALVANIZED SHEET STEEL         | 2.01 mm | 2.77 mm   |

\*\* SEE STD. E-100M FOR 'ROAD WORK' AND 'END ROAD WORK' SIGN DIMENSIONS.

REVISIONS AND CORRECTIONS  
-ORIGINAL APPROVAL DATE

APPROVED  
\_\_\_\_\_  
DIRECTOR OF ENGINEERING  
\_\_\_\_\_  
DIRECTOR OF CONSTRUCTION AND MAINTENANCE

TRAFFIC SIGNS  
TYPICAL MINOR  
MAINTENANCE OPERATION  
APPROACH SIGNS

**OTHER STDS. E-100M E-106M  
REQUIRED: E-103M**

NOTE: ALL DIMENSIONS ARE IN MILLIMETERS (mm) EXCEPT WHERE NOTED.

**Metric  
STANDARD  
E-10M**