



**4 - LANE HIGHWAY
MEDIAN MAINTENANCE**

MOVE SIGNS AHEAD AS WORK PROGRESSES.

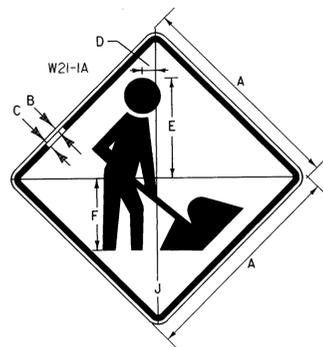

SIGN	DIMENSIONS (mm)						
	A	B	C	D	E	F	J
2 LANE	900	15	20	55	420	300	55
4 LANE	1200	20	30	75	560	400	75

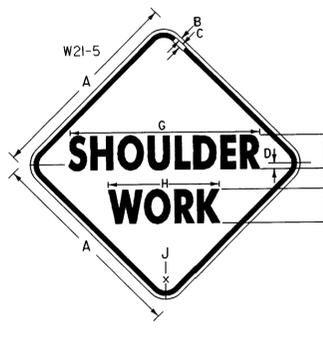


SIGN	DIMENSIONS (mm)						
	A	B	C	D	E	F	J
2 LANE	900	15	20	25	1250	85	866
4 LANE	1200	20	30	25	1750	100	1015




SIGN	DIMENSIONS (mm)									
	A	B	C	D	E	F	G	H	J	K
2 LANE	900	15	20	1250	100	60	437	874	553	55
4 LANE	1200	20	30	1750	125	85	613	1228	776	75

* REDUCE SPACING BY 40 %

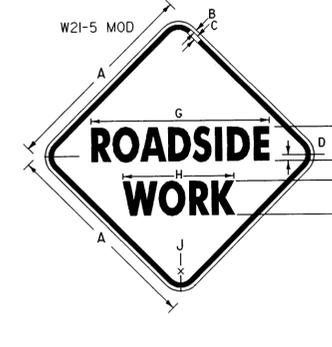


SIGN	DIMENSIONS (mm)						
	A	B	C	D	E	F	J
2 LANE	900	15	20	10	1250	85	818
4 LANE	1200	20	30	25	1750	100	948

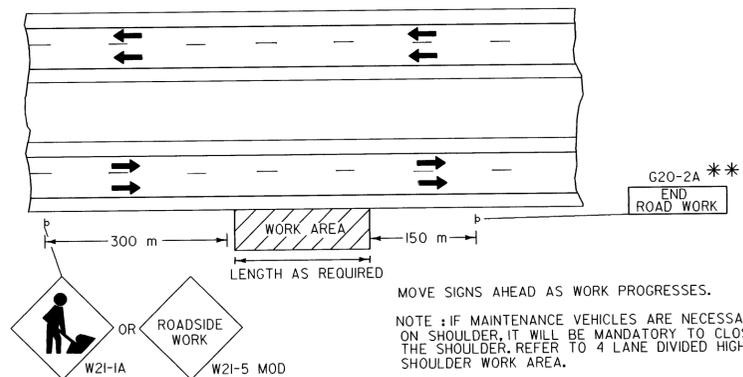

**4 - LANE HIGHWAY
MAINTENANCE OUTSIDE SHOULDER**


MOVE SIGNS AHEAD AS WORK PROGRESSES.

NOTE : IF MAINTENANCE VEHICLES ARE NECESSARY ON SHOULDER, IT WILL BE MANDATORY TO CLOSE THE SHOULDER. REFER TO 4 LANE DIVIDED HIGHWAY SHOULDER WORK AREA.

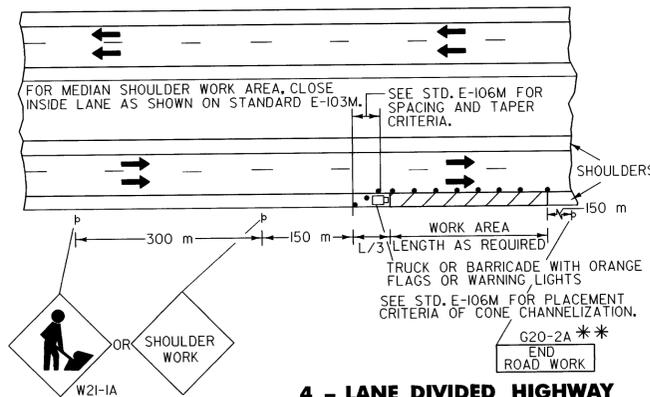

**4 - LANE DIVIDED HIGHWAY
SHOULDER WORK AREA**

SEE STD. E-106M FOR SPACING AND TAPER CRITERIA.

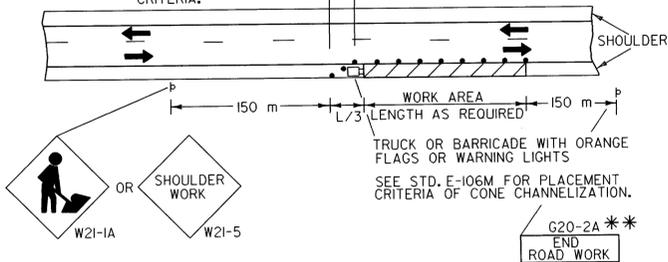

**2 - LANE HIGHWAY
SHOULDER WORK AREA**

SEE STD. E-106M FOR SPACING AND TAPER CRITERIA.

NOTES:

REFLECTORIZAION:
ALL REFLECTIVE MATERIAL SHALL CONSIST OF ENCAPSULATED LENS REFLECTIVE SHEETING. THE TEXT AND BORDERS MAY BE SCREENED, LETTERING FILM OR HAND PAINTED.

COLORS:
THE WARNING SIGNS SHOWN ON THIS SHEET SHALL HAVE A BLACK TEXT AND BORDER ON A REFLECTORIZED ORANGE BACKGROUND. THE ORANGE SHALL CONFORM WITH THE STANDARD COLORS ADOPTED BY AASHTO AND APPROVED BY FHWA.

TEXT DESIGN:
LETTERS, SPACING AND TEXT DIMENSIONS SHALL CONFORM TO THE LATEST VERSION OF FHWA'S "STANDARD ALPHABETS FOR HIGHWAY SIGNS AND PAVEMENT MARKINGS".

SPECIFICATIONS:
WARNING SIGNS SHALL MEET THE STANDARD STATE SPECIFICATIONS FOR SIGNS AS PRESCRIBED IN THE VAOT STANDARD SPECIFICATIONS FOR CONSTRUCTION.


SIGN BASE MATERIAL:
THE SIGN BASE MATERIAL USED FOR THE WARNING SIGNS SHOWN ON THIS SHEET MAY BE OF ANY OF THE FOLLOWING, WITH MINIMUM THICKNESS AS NOTED:

	900X900	1200X1200
(1) FLAT SHEET ALUMINUM	2.54 mm	3.18 mm
(2) HIGH DENSITY OVERLAYED PLYWOOD	16 mm	19 mm
(3) GALVANIZED SHEET STEEL	2.01mm	2.77 mm

**
SEE STD. E-100M FOR "ROAD WORK"
AND "END ROAD WORK" SIGN DIMENSIONS.

**OTHER STDS. E-100M E-106M
REQUIRED: E-103M**

NOTE: ALL DIMENSIONS ARE IN MILLIMETERS (mm) EXCEPT WHERE NOTED.



**Metric
STANDARD
E-10M**

REVISIONS AND CORRECTIONS

JUNE 13, 1997 - ORIGINAL APPROVAL DATE

Notes 2-1-1997

APPROVED

[Signature]
DIRECTOR OF ENGINEERING

[Signature]
DIRECTOR OF CONSTRUCTION AND MAINTENANCE

**TRAFFIC SIGNS
TYPICAL MINOR
MAINTENANCE OPERATION
APPROACH SIGNS**