




SIGN	DIMENSIONS (mm)				
	A	B	C	D	E
MIN	450	10	35	380	35
STD	600	10	50	500	35
SPECIAL	750	20	65	620	45

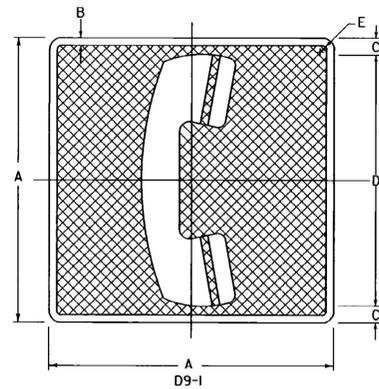


SIGN	DIMENSIONS (mm)				
	A	B	C	D	E
MIN	450	10	35	380	35
STD	600	10	50	500	35
SPECIAL	750	20	65	620	45

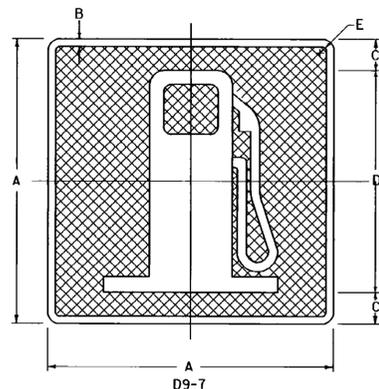


SIGN	DIMENSIONS (mm)				
	A	B	C	D	E
MIN	450	10	35	380	35
STD	600	10	50	500	35
SPECIAL	750	20	65	620	45

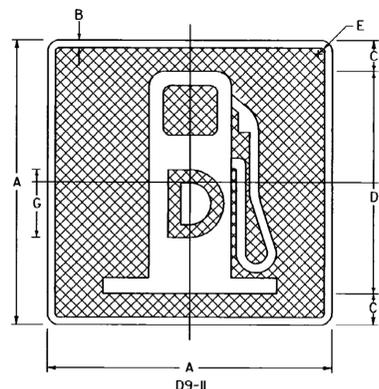


SIGN	DIMENSIONS (mm)					
	A	B	C	D	E	G
MIN	450	10	35	380	35	100E(M)
STD	600	10	50	500	35	150E(M)
SPECIAL	750	20	65	620	45	200E(M)

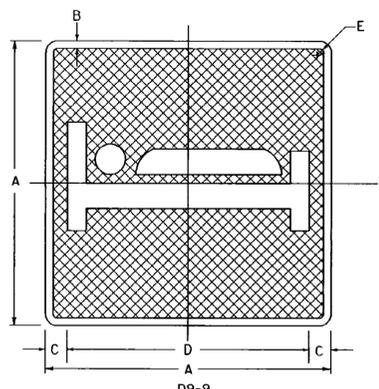


SIGN	DIMENSIONS (mm)				
	A	B	C	D	E
MIN	450	10	35	380	35
STD	600	10	50	500	35
SPECIAL	750	20	65	620	45

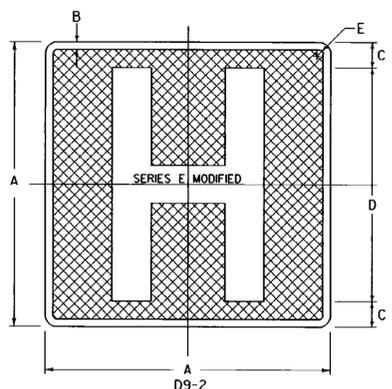


SIGN	DIMENSIONS (mm)				
	A	B	C	D	E
MIN	450	10	35	380	35
STD	600	10	50	500	35
SPECIAL	750	20	65	620	45

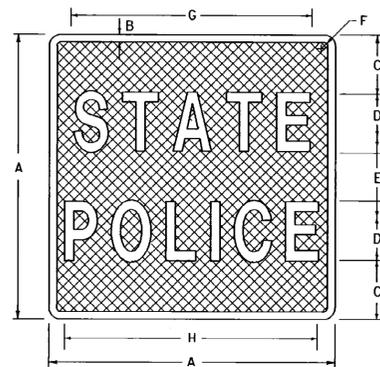


SIGN	DIMENSIONS (mm)							
	A	B	C	D	E	F	G	H
MIN AND STD	600	10	125	125C	100	35	396	474
SPECIAL	750	10	150	150C	150	35	476	569

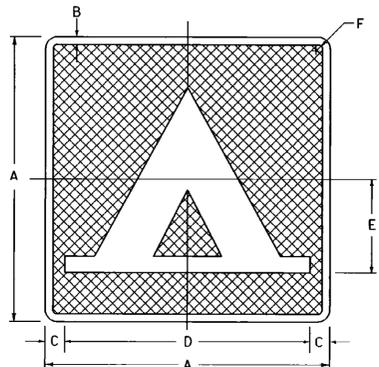


SIGN	DIMENSIONS (mm)					
	A	B	C	D	E	F
MIN	450	10	35	380	150	35
STD	600	10	50	500	200	35
SPECIAL	750	20	65	620	250	45

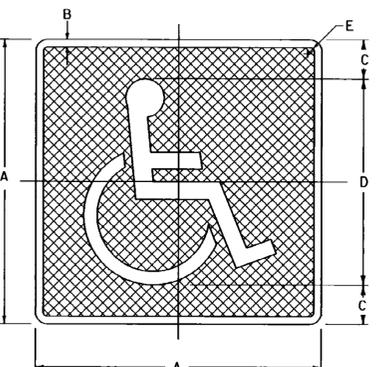

SIGN	DIMENSIONS (mm)				
	A	B	C	D	E
MIN	450	10	35	380	35
STD	600	10	50	500	35
SPECIAL	750	20	65	620	45



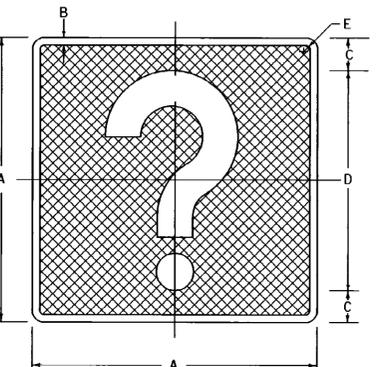


SIGN	DIMENSIONS (mm)				
	A	B	C	D	E
MIN	450	10	35	380	35
STD	600	10	50	500	35
SPECIAL	750	20	65	620	45

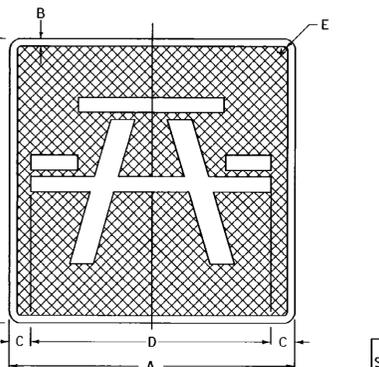

• INCREASE SPACING 50%

SIGN	DIMENSIONS (mm)										
	A	B	C	D	E	F	G	H	J	K	L
STD	300	150	10	10	35	35D	20	25D	57	102	35
SPECIAL	450	225	10	15	55	50D	30	35D	70	178	35

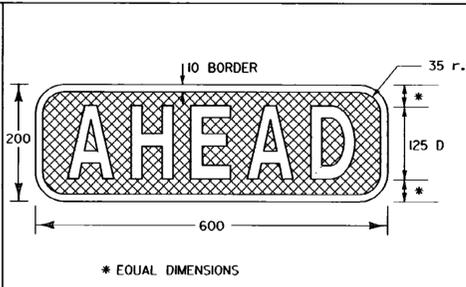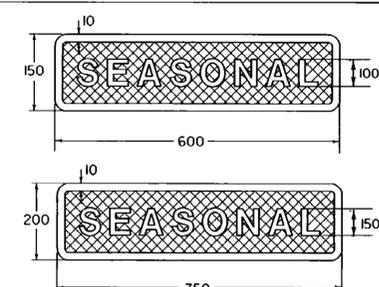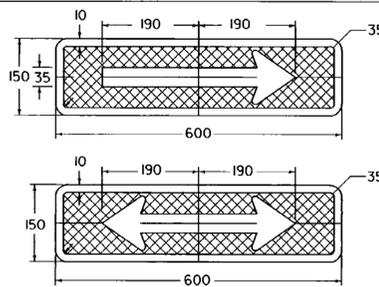

NOTES

MATERIALS

THE SIGN BASE MATERIAL USED FOR THE GUIDE SIGNS SHOWN ON THIS SHEET MAY BE ANY OF THE FOLLOWING MINIMUM THICKNESSES NOTED:

- A - FLAT SHEET ALUMINUM - 1.52 mm
- B - HIGH DENSITY OVERLAID PLYWOOD - 13 mm
- C - GALVANIZED FLAT SHEET STEEL - 1.63 mm

COLORS

THE SIGNS SHALL BE WHITE OR SILVER REFLECTORIZED SHEETING WITH A REVERSE SCREENED BLUE BACKGROUND. THE BLUE SHALL CONFORM WITH THE STANDARD COLORS ADOPTED BY AASHTO AND APPROVED BY THE FHWA.

LETTERING

LETTERS SHALL CONFORM WITH THE REQUIREMENTS FOUND IN THE PUBLICATION "STANDARD ALPHABETS FOR HIGHWAY SIGNS AND PAVEMENT MARKINGS" PRINTED BY THE FHWA.

DESIGN

THE DESIGN OF THESE SIGNS SHALL CONFORM WITH THE DETAILS SET FORTH IN THE MANUAL "STANDARD HIGHWAY SIGNS" AS SPECIFIED IN THE MUTCD. LETTER/NUMERAL DESIGNATION UNDER EACH SYMBOL IS IDENTIFIED IN THE MANUAL.

SPECIFICATIONS

THESE SIGNS SHALL MEET THE STANDARD STATE SPECIFICATIONS FOR TRAFFIC SIGNS AS PRESCRIBED IN THE VDOT STANDARD SPECIFICATIONS FOR CONSTRUCTION.

OTHER STDS. REQUIRED:

NOTE: ALL DIMENSIONS ARE IN MILLIMETERS (mm) EXCEPT WHERE NOTED.

REVISIONS AND CORRECTIONS

JUNE 13, 1997 - ORIGINAL APPROVAL DATE

APPROVED

[Signature]
DIRECTOR OF ENGINEERING

[Signature]
DIRECTOR OF CONSTRUCTION AND MAINTENANCE

GENERAL MOTORIST SERVICES SIGN DETAILS



Metric
STANDARD
E-132M