




\* REDUCE SPACING 50 %  
LINE 3 ALTERNATE - 16,000  
**VR-017**

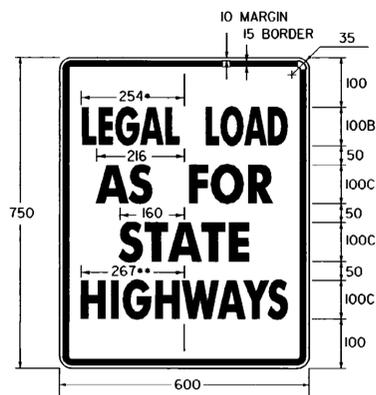


\* REDUCE SPACING 50 %  
\*\* REDUCE SPACING 16 %  
**VR-079**

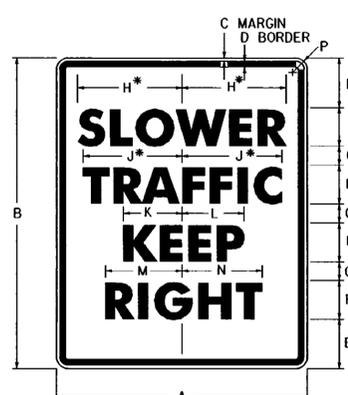

\* REDUCE SPACING 25 %  
**R4-3**

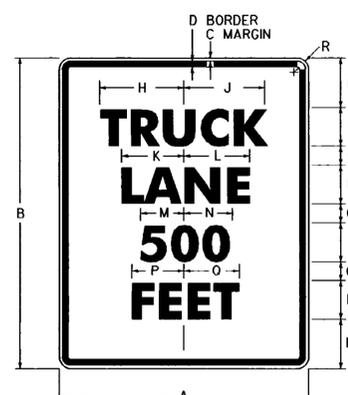


**R4-6**

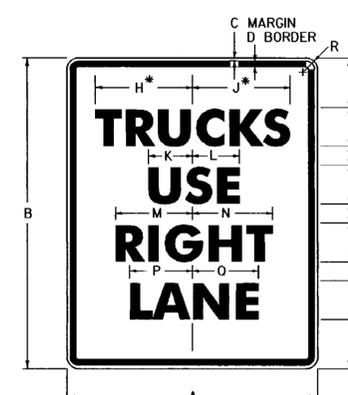

\* REDUCE SPACING 32 %  
**R4-5**




**VR-039**

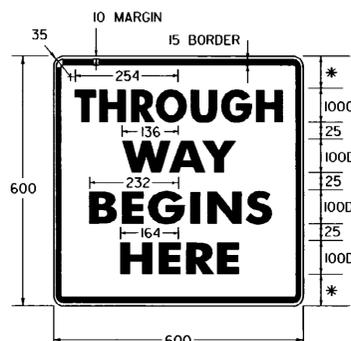

\* EQUAL DIMENSIONS  
**VR-041**



**VR-038**

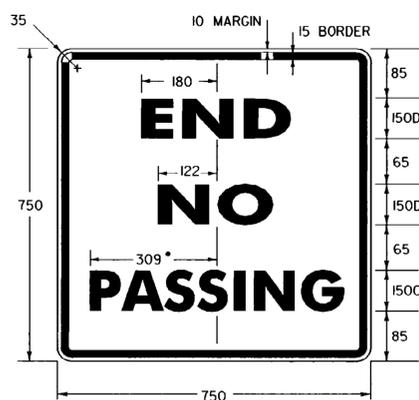


\* REDUCE SPACING 50 %  
**VR-417**


SIGN	DIMENSIONS (mm)													
	A	B	C	D	E	F	G	H	J	K	L	M	N	P
STD.	600	750	10	15	85	100D	60	248	254	152	167	180	193	35
EXPWY.	900	1200	15	20	150	150D	100	371	381	228	249	270	289	55
FWY.	1200	1500	20	30	185	200D	110	495	508	305	334	361	388	75

SIGN	DIMENSIONS (mm)															
	A	B	C	D	E	F	G	H	J	K	L	M	N	P	Q	R
STD.	600	750	10	15	85	100E	60	249	246	191	196	143	148	175	181	35
EXPWY.	900	1200	15	20	150	150E	100	373	368	286	292	215	222	262	271	55
FWY.	1200	1500	20	30	185	200E	110	497	491	382	389	287	295	349	359	75

SIGN	DIMENSIONS (mm)																	
	A	B	C	D	E	F	G	H	J	K	L	M	N	P	Q	R		
STD.	600	750	10	15	85	100D	60	242	233	119	127	180	193	158	168	35		
EXPWY.	900	1200	15	20	150	150D	100	362	350	179	190	270	289	237	253	55		
FWY.	1200	1500	20	30	185	200D	110	486	469	240	254	361	388	317	337	75		

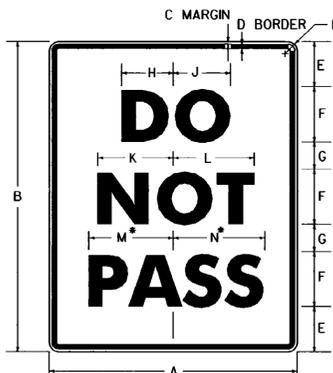

\* REDUCE SPACING 40 %  
**R4-1**

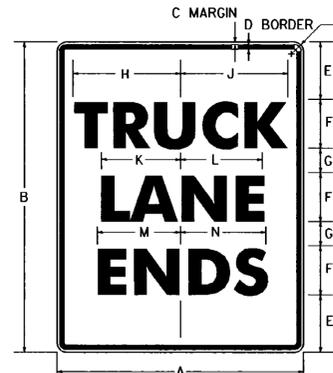

**VR-186**

SIGN	DIMENSIONS (mm)													
	A	B	C	D	E	F	G	H	J	K	L	M	N	P
STD.	600	750	10	15	85	150D	65	114	123	179	187	237	247	35
EXPWY.	900	1200	15	20	175	200D	125	154	164	241	249	318	331	55
FWY.	1200	1500	20	30	200	250D	175	192	206	301	311	397	414	75

SIGN	DIMENSIONS (mm)															
	A	B	C	D	E	F	G	H	J	K	L	M	N	P		
STD.	600	750	10	15	85	150C	65	262	262	198	199	203	206	35		
EXPWY.	900	1200	15	20	175	200C	125	350	350	265	265	273	273	55		
FWY.	1200	1500	20	30	200	250D	175	528	529	407	409	411	412	75		

**COLORS:**

THE REGULATORY SIGNS SHOWN ON THIS SHEET SHALL HAVE BLACK TEXT ON REFLECTORIZED WHITE BACKGROUND, UNLESS OTHERWISE NOTED. THE COLORS SHALL CONFORM WITH THE COLORS ADOPTED BY AASHTO AND APPROVED BY THE FHWA.

**MATERIALS:**

THE SIGN BASE MATERIALS USED FOR REGULATORY SIGNS SHOWN ON THIS SHEET MAY BE ANY OF THE FOLLOWING MINIMUM THICKNESSES NOTED:

600 X 450	
600 X 600	
600 X 750	900 X 1200
750 X 750	1200 X 1500

FLAT SHEET ALUMINUM  
HIGH DENSITY OVERLAID PLYWOOD  
GALVANIZED FLAT SHEET STEEL

2.03 mm	2.54 mm
13 mm	16 mm
1.63 mm	2.01 mm

THE REFLECTIVE MATERIAL FOR GROUND MOUNTED SIGNS SHALL BE AASHTO TYPE II OR III WHITE REFLECTIVE SHEETING APPLIED TO THE ENTIRE BACKGROUND OF THE SIGN. THE TEXT OF THE SIGNS MAY BE LETTERING FILM, SILK SCREENED OR HAND PAINTED. HAND PAINTING MUST BE COMPARABLE IN QUALITY TO THE RESULTS OBTAINED BY SILK SCREENING.

**SPECIFICATIONS:**

REGULATORY SIGNS SHALL MEET THE VERMONT STANDARD SPECIFICATIONS FOR TRAFFIC SIGNS AS PRESCRIBED IN THE VDOT STANDARD SPECIFICATIONS FOR CONSTRUCTION.

**TEXT DESIGN:**

LETTERS, DIGITS, ARROWS, SPACING AND TEXT DIMENSIONS SHALL CONFORM TO THE LATEST VERSION OF FHWA'S "STANDARD ALPHABETS FOR HIGHWAY SIGNS AND PAVEMENT MARKINGS". DESIGNS SHALL CONFORM WITH THOSE PRESCRIBED IN THE PUBLICATION "STANDARD HIGHWAY SIGNS" AS SPECIFIED IN THE MUTCD.

REVISIONS AND CORRECTIONS  
JUNE 13, 1997 - ORIGINAL APPROVAL DATE

APPROVED

*[Signature]*  
DIRECTOR OF ENGINEERING  
*[Signature]*  
DIRECTOR OF CONSTRUCTION AND MAINTENANCE

REGULATORY SIGN  
DETAILS

OTHER STDS. NONE  
REQUIRED:

NOTE: ALL DIMENSIONS ARE IN MILLIMETERS (mm) EXCEPT WHERE NOTED.



**M**etric  
STANDARD  
E-141M