



* OPTICALLY SPACE NUMERALS ABOUT VERTICAL CENTERLINE.
R2-1

SIGN	DIMENSIONS (mm)										
	A	B	C	D	E	F	G	H	J	K	L
MIN.	450	600	10	15	75	50	200E	35	182	140	
STD.	600	750	10	15	100	100E	50	250E	35	244	187
EXPWY.	900	1200	15	20	150	150E	125	350E	55	365	279
FWY.	1200	1500	20	30	200	200E	100	500E	75	486	372

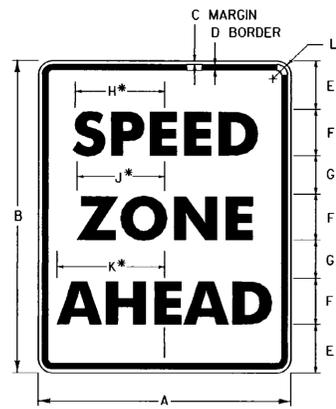


* FOR STD SIZE, REDUCE SPACING 40 %
R2-5C


SIGN	DIMENSIONS (mm)										
	A	B	C	D	E	F	G	H	J	K	L
MIN.	450	600	10	15	85	100C	65	173	141	178	35
STD.	600	750	10	15	85	150C	65	233	192	247	35
EXPWY.	900	1200	15	20	175	200C	125	346	280	356	55
FWY.	1200	1500	20	30	225	250C	150	432	352	445	75

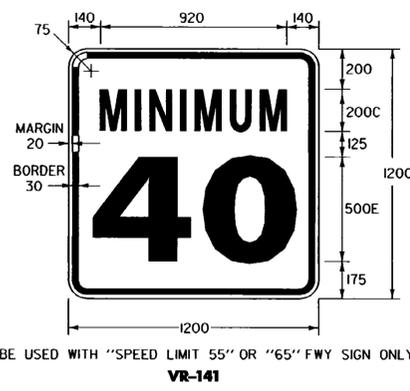

TO BE USED WITH "SPEED LIMIT 55" OR "65" FWY SIGN ONLY
VR-141

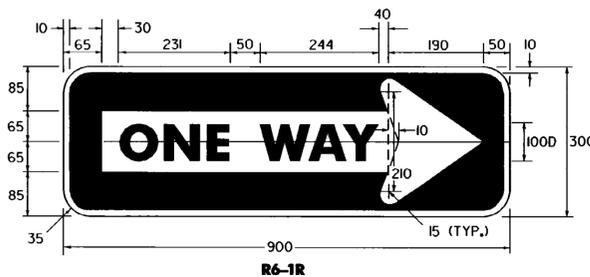

R6-1R

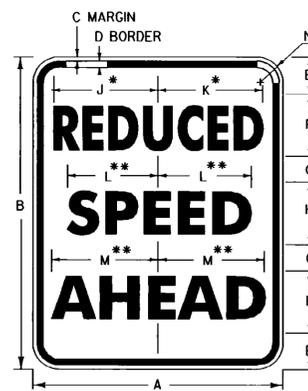


R2-5A

SIGN	DIMENSIONS (mm)													
	A	B	C	D	E	F	G	H	J	K	L	M	N	
MIN.	450	600	10	15	85	100B	65	100C	182	186	173	178	35	
STD.	600	750	10	15	85	150B	65	150C	246	266	235	247	35	
EXPWY.	900	1200	15	20	175	200B	125	200C	361	374	346	356	55	
FWY.	1200	1500	20	30	225	250B	150	250C	450	468	432	445	75	



TEXT 100C; SPACING 50
VR-002

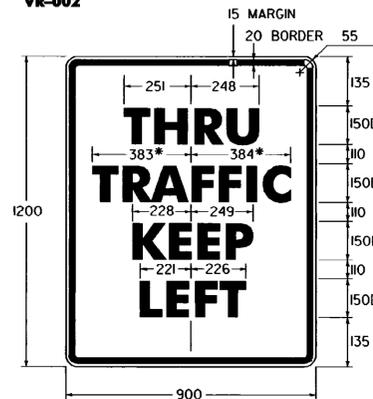


* REDUCE SPACING 25 %
VR-118L



* FOR FWY SIZE, REDUCE SPACING 50 %
R8-7

SIGN	DIMENSIONS (mm)													
	A	B	C	D	E	F	G	H	J	K	L	M	N	P
EXPWY.	750	600	10	15	85	100C	65	100D	318	331	324	163	178	35
FWY.	1200	900	15	20	125	150D	100	150D	517	536	485	249	263	55

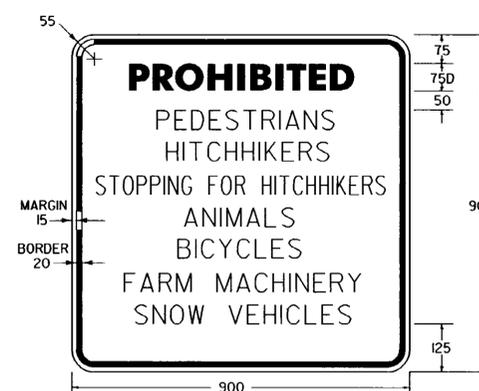

TEXT 50C, WITH EQUAL LINE SPACING, EXCEPT WHERE NOTED.
VR-046



* OPTICALLY SPACE NUMERALS ABOUT VERTICAL CENTERLINE.
R2-4

SIGN	DIMENSIONS (mm)										
	A	B	C	D	E	F	G	H	J	K	L
STD.	600	750	10	15	100	100C	50	250D	35	232	173
EXPWY.	900	1200	15	20	150	150C	125	350D	35	349	259
FWY.	1200	1500	20	30	200	200C	100	500D	75	466	346

COLORS:

THE REGULATORY SIGNS SHOWN ON THIS SHEET SHALL HAVE BLACK TEXT ON REFLECTORIZED WHITE BACKGROUND, UNLESS OTHERWISE NOTED. THE COLORS SHALL CONFORM WITH THE COLORS ADOPTED BY AASHTO AND APPROVED BY THE FHWA.

MATERIALS:

THE SIGN BASE MATERIALS USED FOR REGULATORY SIGNS SHOWN ON THIS SHEET MAY BE ANY OF THE FOLLOWING MINIMUM THICKNESSES NOTED:

Material	450 X 600	600 X 750 750 X 600	900 X 300 900 X 900 900 X 1200 1200 X 900 1200 X 1200 1200 X 1500
FLAT SHEET ALUMINUM	1.52 mm	2.03 mm	2.54 mm
HIGH DENSITY OVERLAIN PLYWOOD	13 mm	13 mm	16 mm
GALVANIZED FLAT SHEET STEEL	1.32 mm	1.63 mm	2.01 mm

THE REFLECTIVE MATERIAL FOR GROUND MOUNTED SIGNS SHALL BE AASHTO TYPE II OR III WHITE REFLECTIVE SHEETING APPLIED TO THE ENTIRE BACKGROUND OF THE SIGN. THE TEXT OF THE SIGNS MAY BE LETTERING FILM, SILK SCREENED OR HAND PAINTED. HAND PAINTING MUST BE COMPARABLE IN QUALITY TO THE RESULTS OBTAINED BY SILK SCREENING.

SPECIFICATIONS:

REGULATORY SIGNS SHALL MEET THE VERMONT STANDARD SPECIFICATIONS FOR TRAFFIC SIGNS AS PRESCRIBED IN THE VAOT STANDARD SPECIFICATIONS FOR CONSTRUCTION.

TEXT DESIGN:

LETTERS, DIGITS, ARROWS, SPACING AND TEXT DIMENSIONS SHALL CONFORM TO THE LATEST VERSION OF FHWA'S "STANDARD ALPHABETS FOR HIGHWAY SIGNS AND PAVEMENT MARKINGS". DESIGNS SHALL CONFORM WITH THOSE PRESCRIBED IN THE PUBLICATION "STANDARD HIGHWAY SIGNS" AS SPECIFIED IN THE MUTCD.

REVISIONS AND CORRECTIONS
JUNE 13, 1997 - ORIGINAL APPROVAL DATE


APPROVED

[Signature]
DIRECTOR OF ENGINEERING
[Signature]
DIRECTOR OF CONSTRUCTION AND MAINTENANCE

REGULATORY SIGN
DETAILS

OTHER STDS. NONE
REQUIRED:

NOTE: ALL DIMENSIONS ARE IN MILLIMETERS (mm) EXCEPT WHERE NOTED.



Metric
STANDARD
E-142M