



• FOR STD SIZE, REDUCE SPACING 25%
VR-048

SIGN	DIMENSIONS (mm)																
	A	B	C	D	E	F	G	H	J	K	L	M	N	P	O	R	S
STD.	600	750	10	15	85	100B	75	75B	35	75B	85	241	180	216	159	210	35
EXPWY. & FWY.	1200	1500	20	30	150	175C	125	150B	100	150B	150	533	360	457	320	420	75


SIGN	DIMENSIONS (mm)													
	A	B	C	D	E	F	G	H	J	K	L	M	N	P
MIN.	450	600	10	15	85	100C	65	139	144	127	121	136	140	35
STD.	600	750	10	15	85	150C	65	207	215	189	183	202	210	35
EXPWY.	900	1200	15	20	175	200C	125	276	286	253	242	271	280	55
FWY.	1200	1500	20	30	200	250C	175	347	358	317	304	339	350	75

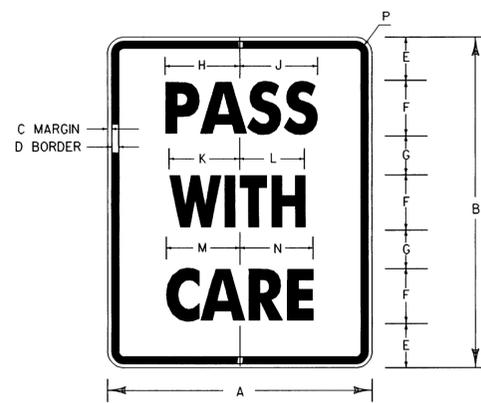

R4-2

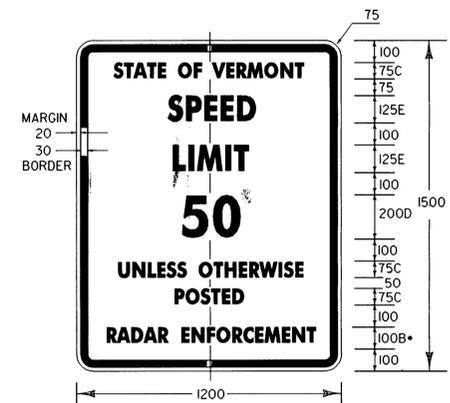


• REDUCE SPACING 25%
VR-114

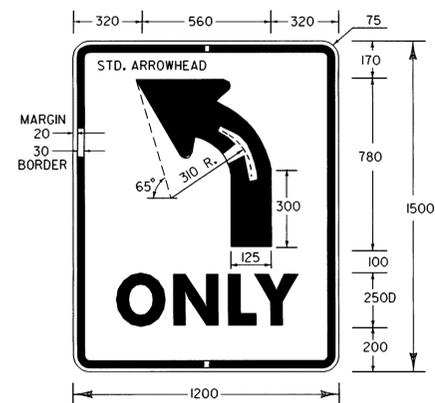

(OVERHEAD SIGN)
R3-5


ARROW HEAD DETAIL

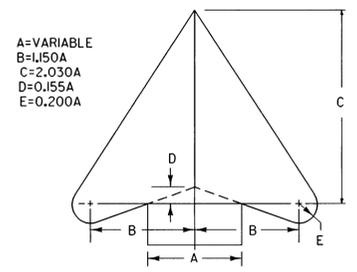


A=VARIABLE
B=1.50A
C=2.030A
D=0.155A
E=0.200A

DIMENSIONS (mm)				
A	B	C	D	E
50	58	102	8	10
55	63	112	9	11
60	69	122	9	12
65	75	132	10	13
70	81	142	11	14
75	86	152	12	15
80	92	162	12	16
85	98	173	13	17
90	104	183	14	18
95	109	193	15	19
100	115	203	16	20
105	121	213	16	21
110	127	223	17	22


DIMENSIONS (mm)				
A	B	C	D	E
115	132	233	18	23
120	138	244	19	24
125	144	254	19	25
130	150	264	20	26
140	161	284	22	28
145	167	294	22	29
150	173	305	23	30
155	178	315	24	31
160	184	325	25	32
165	190	335	26	33
170	196	345	26	34
175	201	355	27	35
180	207	365	28	36
185	213	376	29	37
190	219	386	29	38
195	224	396	30	39
200	230	406	31	40

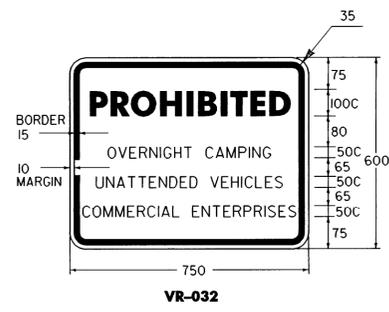


VR-032

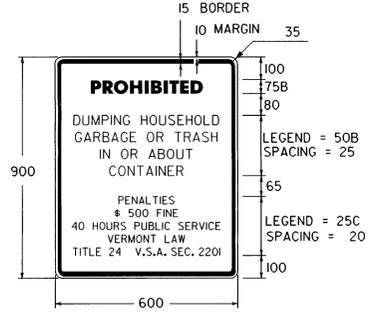

VR-278

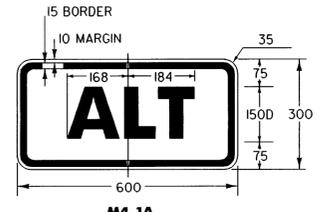

M4-1A

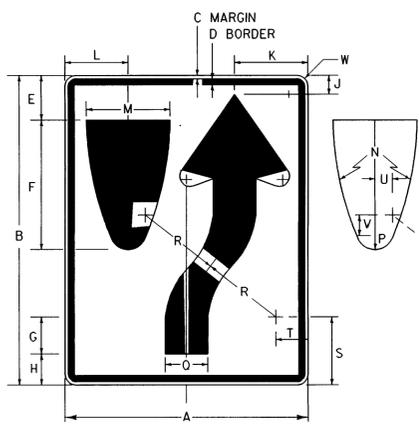

R4-7

NOTES:
COLORS:

THE REGULATORY SIGNS SHOWN ON THIS SHEET SHALL HAVE BLACK TEXT ON REFLECTORIZED WHITE BACKGROUND, UNLESS OTHERWISE NOTED. THE COLORS SHALL CONFORM WITH THE COLORS ADOPTED BY AASHTO AND APPROVED BY THE FHWA.

MATERIALS:

THE SIGN BASE MATERIALS USED FOR REGULATORY SIGNS SHOWN ON THIS SHEET MAY BE ANY OF THE FOLLOWING MINIMUM THICKNESSES NOTED:

600 X 300	1.52 mm	2.03 mm	2.54 mm
600 X 600	1.52 mm	1.32 mm	1.63 mm
600 X 750	1.52 mm	1.32 mm	1.63 mm
600 X 900	1.52 mm	1.32 mm	1.63 mm
450 X 600	1.52 mm	1.32 mm	1.63 mm
750 X 600	1.52 mm	1.32 mm	1.63 mm
900 X 1200	1.52 mm	1.32 mm	1.63 mm
1200 X 1500	1.52 mm	1.32 mm	1.63 mm

FLAT SHEET ALUMINUM 1.52 mm
HIGH DENSITY OVERLAID PLYWOOD 13 mm
GALVANIZED FLAT SHEET STEEL 1.32 mm

THE REFLECTIVE MATERIAL FOR GROUND MOUNTED SIGNS SHALL BE AASHTO TYPE II OR III WHITE REFLECTIVE SHEETING APPLIED TO THE ENTIRE BACKGROUND OF THE SIGN. IF MOUNTED OVERHEAD, ALL SIGNS SHALL HAVE ENCAPSULATED LENS REFLECTIVE SHEETING APPLIED TO THE ENTIRE BACKGROUND OF THE SIGN. THE TEXT OF THE SIGNS MAY BE LET-TERING FILM, SILK SCREENED OR HAND PAINTED. HAND PAINTING MUST BE COMPARABLE IN QUALITY TO THE RESULTS OBTAINED BY SILK SCREENING.

SPECIFICATIONS:

REGULATORY SIGNS SHALL MEET THE VERMONT STANDARD SPECIFICATIONS FOR TRAFFIC SIGNS AS PRESCRIBED IN THE VDOT STANDARD SPECIFICATIONS FOR CONSTRUCTION.

TEXT DESIGN:

LETTERS, DIGITS, ARROWS, SPACING AND TEXT DIMENSIONS SHALL CONFORM TO THE LATEST VERSION OF FHWA'S 'STANDARD ALPHABETS FOR HIGHWAY SIGNS AND PAVEMENT MARKINGS'. DESIGNS SHALL CONFORM WITH THOSE PRESCRIBED IN THE PUBLICATION 'STANDARD HIGHWAY SIGNS' AS SPECIFIED IN THE MUTCD.



• REDUCE SPACING 40%
•• REDUCE SPACING 65%
VR-023b



VR-648




VR-541

* EQUAL DIMENSIONS

REVISIONS AND CORRECTIONS
JUNE 13, 1997 - ORIGINAL APPROVAL DATE
FEB. 2, 1998 - REMOVED VR-023, REPLACED WITH VR-278

APPROVED
[Signature]
DIRECTOR OF PROJECT DEVELOPMENT
[Signature]
DIRECTOR OF CONSTRUCTION AND MAINTENANCE

REGULATORY SIGN
DETAILS

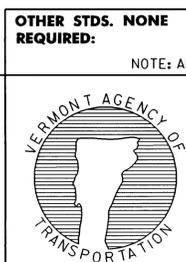

Metric
STANDARD
E-144M

OTHER STDS. NONE REQUIRED:
NOTE: ALL DIMENSIONS ARE IN MILLIMETERS (mm) EXCEPT WHERE NOTED.