




W11A-2

SIGN	DIMENSIONS (mm)									
	A	B	C	D	E	F	G	H	J	
BIKE	450	10	15	210	120	20	60	90	35	
MIN.	600	10	15	275	160	30	80	120	35	
STD.	750	10	20	350	200	35	100	150	45	
EXPWY.	900	15	20	420	240	45	120	180	55	
SPECIAL	1200	20	30	550	320	60	155	235	75	

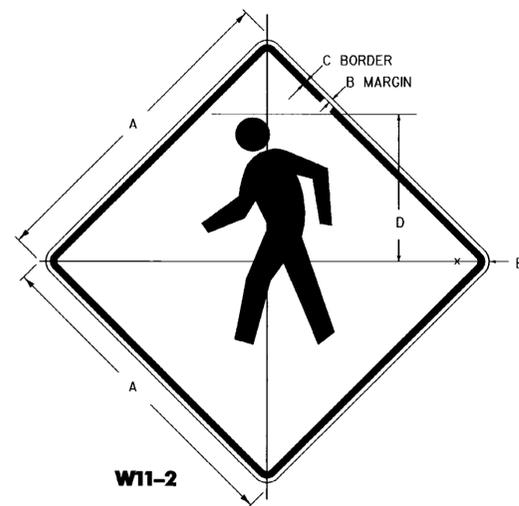

W11-2


SIGN	DIMENSIONS (mm)				
	A	B	C	D	E
MIN.	600	10	15	275	35
STD.	750	10	20	335	45
EXPWY.	900	15	20	400	55
SPECIAL	1200	20	30	550	75

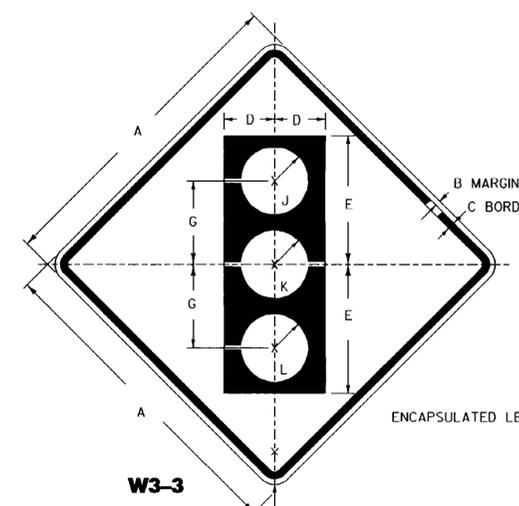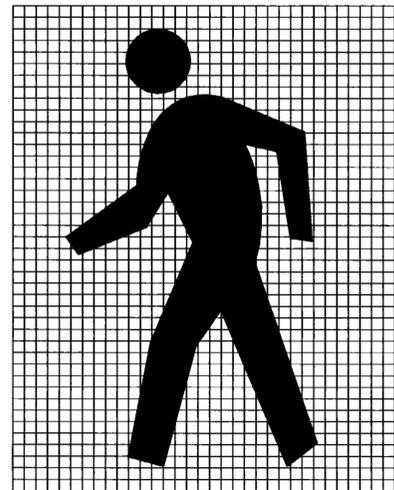


W3-3

SIGN	DIMENSIONS (mm)							
	A	B	C	D	E	F	G	H
BIKE	450	10	15	75	200	55	125	35
MIN.	750	10	20	125	345	95	220	45
STD. & MIN.	900	15	20	145	395	105	250	55
SPECIAL	1200	20	30	190	500	125	315	75

ADDITIONAL COLORS : J - REFL. RED  
 K - REFL. YELLOW  
 L - REFL. GREEN

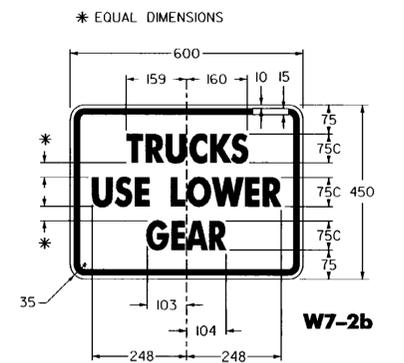


W7-2b

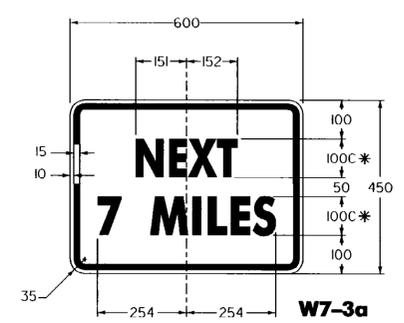

W7-3a


\* INCREASE SPACING 75%

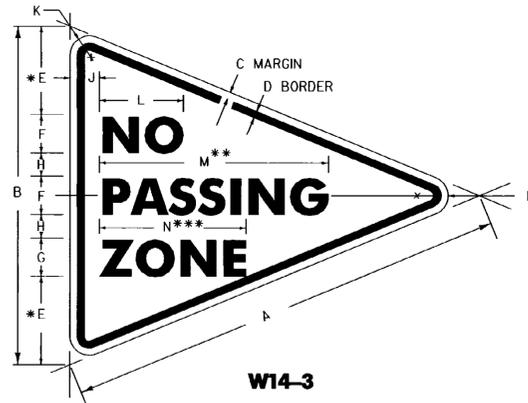

W14-3


SIGN	DIMENSIONS (mm)													
	A	B	C	D	E	F	G	H	J	K	L	M	N	
MIN.	1000	750	10	20	-	1000	100C	45	60	45	163	570	281	
STD.	1200	900	15	20	-	1250	125C	50	75	55	204	681	324	
SPECIAL	1600	1200	20	30	-	1500	150C	75	100	75	273	854	420	

\*EQUAL DIMENSIONS  
 \*\*FOR STD. SIZE REDUCE SPACING 20 %  
 \*\*\*FOR STD. SIZE REDUCE SPACING 35 %

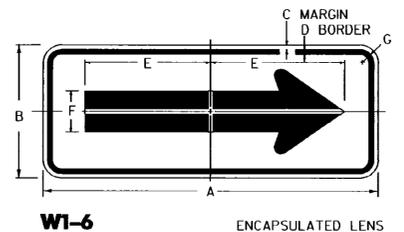


W1-6

SIGN	DIMENSIONS (mm)							
	A	B	C	D	E	F	G	H
BIKE	600	300	10	15	240	85	35	260
MIN.	900	450	10	15	365	125	35	390
STD.	1200	600	10	20	485	160	45	510
SPECIAL	1500	750	15	20	610	200	55	635

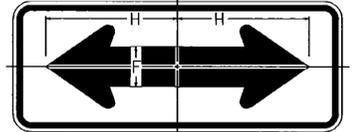


W1-7

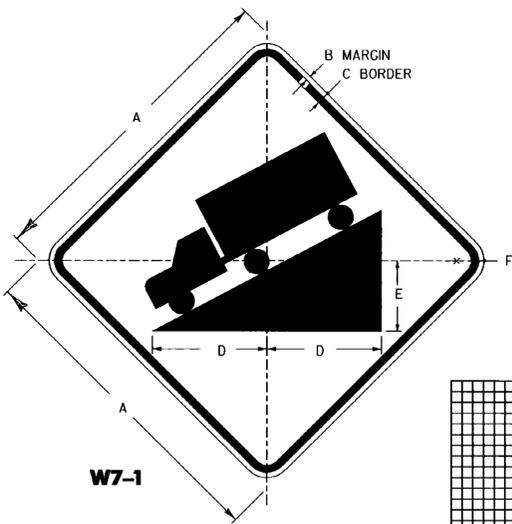

W7-1

SIGN	DIMENSIONS (mm)					
	A	B	C	D	E	F
MIN.	600	10	15	220	150	35
STD.	750	10	20	275	195	45
EXPWY.	900	15	20	330	225	55
FWY.	1200	20	30	435	300	75

ENCAPSULATED LENS

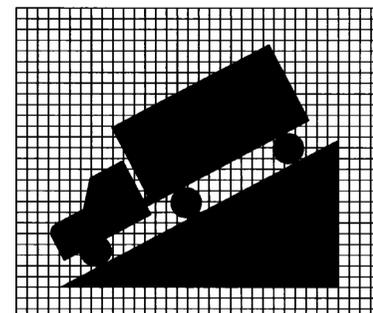

COLORS

ALL THE WARNING SIGNS SHOWN ON THIS SHEET SHALL HAVE BLACK TEXT AND SYMBOLS ON REFLECTORIZED YELLOW BACKGROUND EXCEPT AS OTHERWISE NOTED. THE COLORS SHALL CONFORM WITH THE COLORS ADOPTED BY AASHTO AND APPROVED BY THE FHWA.

MATERIALS

THE SIGN BASE MATERIALS USED FOR THE WARNING SIGNS SHOWN ON THIS SHEET MAY BE ANY OF THE FOLLOWING MINIMUM THICKNESSES NOTED:

SIGN	DIMENSIONS (mm)			
	A	B	C	D
450 x 450	600 x 300	900 x 450	1200 x 600	1200 x 900
	600 x 600	1000 x 750	1200 x 1200	1500 x 1200
	750 x 750	900 x 900	1500 x 750	1600 x 1200
FLAT SHEET ALUMINUM	1.52 mm	2.03 mm	2.54 mm	3.18 mm
HIGH DENSITY OVERLAID PLYWOOD	13 mm	13 mm	16 mm	16 mm
GALVANIZED FLAT SHEET STEEL	1.32 mm	1.63 mm	2.01 mm	2.77 mm

THE TEXT, BORDER AND SYMBOLS SHALL BE LETTERING FILM, SILK SCREENED OR HAND PAINTED. WHEN HAND PAINTED, POOR WORKMANSHIP SHALL BE CAUSE FOR REJECTION.

THE REFLECTIVE MATERIAL SHALL BE REFLECTIVE SHEETING APPLIED TO THE ENTIRE BACKGROUND OF THE SIGN. ENCAPSULATED LENS REFLECTIVE SHEETING SHALL BE USED FOR THE SIGN BACKGROUND WHERE NOTED.

TEXT DESIGN

LETTERS, DIGITS, SYMBOLS, SPACINGS AND TEXT DIMENSIONS SHALL CONFORM TO THE LATEST VERSION OF FHWA'S 'STANDARD ALPHABETS FOR HIGHWAY SIGNS AND PAVEMENT MARKINGS'. DESIGNS SHALL CONFORM WITH THOSE PRESCRIBED IN THE MUTCD. SEE STANDARD SHEET E-150M FOR ARROWHEAD DETAILS.

SPECIFICATIONS

WARNING SIGNS SHALL MEET THE VERMONT STANDARD SPECIFICATIONS FOR 'TRAFFIC SIGNS' AS PRESCRIBED IN THE VAOT STANDARD SPECIFICATIONS FOR CONSTRUCTION.

REVISIONS AND CORRECTIONS  
 JUNE 13, 1997 - ORIGINAL APPROVAL DATE

APPROVED  
  
 DIRECTOR OF ENGINEERING  
  
 DIRECTOR OF CONSTRUCTION AND MAINTENANCE

WARNING SIGN  
 DETAILS

OTHER STDS. E-150M  
 REQUIRED:  
 NOTE: ALL DIMENSIONS ARE IN MILLIMETERS (mm) EXCEPT WHERE NOTED.

