



S2-1

SIGN	DIMENSIONS (mm)										
	A	B	C	D	E	F	G	H	J	K	L
MIN./STD.	750	10	20	30	410	150	160	45	145	100	300
EXPWY.	900	15	20	35	495	180	195	55	170	120	360
SPECIAL	1200	20	30	50	660	235	260	75	230	160	480

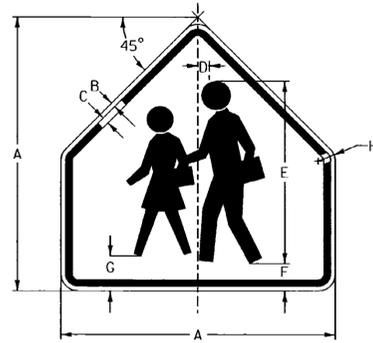



S1-1

SIGN	DIMENSIONS (mm)							
	A	B	C	D	E	F	G	H
MIN./STD.	750	10	20	50	500	75	95	45
EXPWY.	900	15	20	60	600	85	110	55
SPECIAL	1200	20	30	80	800	125	150	75

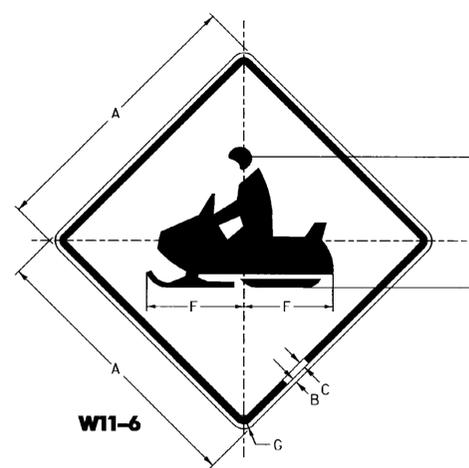

W11-6

SIGN	DIMENSIONS (mm)						
	A	B	C	D	E	F	G
MIN.	600	10	15	235	110	255	35
STD.	750	10	20	285	140	315	45
SPECIAL	900	15	20	355	170	380	55

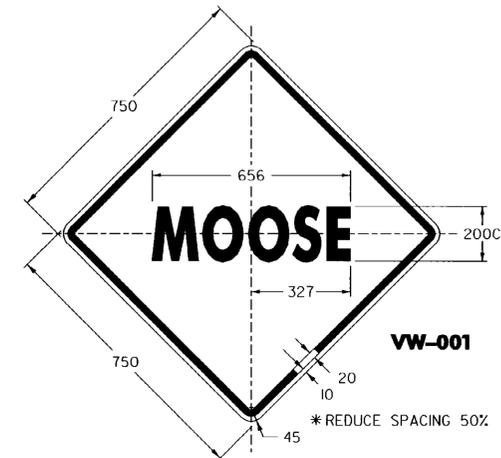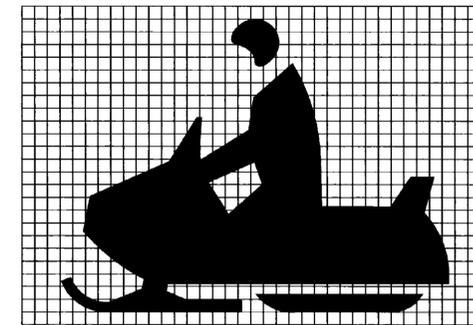

VW-001

COLORS

ALL THE WARNING SIGNS SHOWN ON THIS SHEET SHALL HAVE BLACK TEXT AND SYMBOLS ON REFLECTORIZED YELLOW BACKGROUND EXCEPT AS OTHERWISE NOTED. THE COLORS SHALL CONFORM WITH THE COLORS ADOPTED BY AASHTO AND APPROVED BY THE FHWA.

MATERIALS

THE SIGN BASE MATERIALS USED FOR THE WARNING SIGNS SHOWN ON THIS SHEET MAY BE ANY OF THE FOLLOWING MINIMUM THICKNESSES NOTED:

600 X 200			
600 X 250			
600 X 450	900 X 300		
600 X 600	900 X 375	1200 X 400	
750 X 750	900 X 900	1200 X 500	


FLAT SHEET ALUMINUM 2.03 mm 2.54 mm 3.8 mm
 HIGH DENSITY OVERLAID PLYWOOD 13 mm 16 mm 16 mm
 GALVANIZED FLAT SHEET STEEL 1.63 mm 2.01mm 2.77 mm
 THE TEXT, BORDER AND SYMBOL SHALL BE LETTERING FILM, SILK SCREENED OR HAND PAINTED. IF HAND PAINTED, POOR WORKMANSHIP SHALL BE CAUSE FOR REJECTION. THE REFLECTIVE MATERIAL SHALL BE REFLECTIVE SHEETING APPLIED TO THE ENTIRE BACKGROUND OF THE SIGN. ENCAPSULATED LENS REFLECTIVE SHEETING SHALL BE USED FOR THE SIGN BACKGROUND WHERE NOTED.

TEXT DESIGN


LETTERS, DIGITS, SYMBOLS, SPACINGS AND TEXT DIMENSIONS SHALL CONFORM TO THE LATEST VERSION OF FHWA'S "STANDARD ALPHABETS FOR HIGHWAY SIGNS AND PAVEMENT MARKINGS". DESIGNS SHALL CONFORM WITH THOSE PRESCRIBED IN THE MUTCD.

SPECIFICATIONS

WARNING SIGNS SHALL MEET THE VERMONT STANDARD SPECIFICATIONS FOR "TRAFFIC SIGNS" AS PRESCRIBED IN THE VAOT STANDARD SPECIFICATIONS FOR CONSTRUCTION.

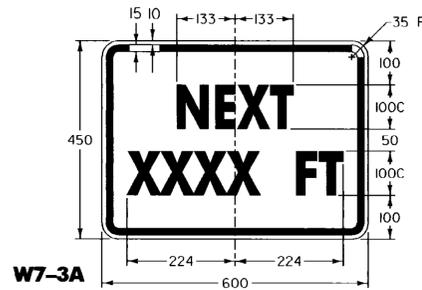


W7-3A

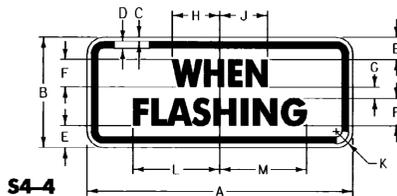


S4-4

SIGN	DIMENSIONS (mm)											
	A	B	C	D	E	F	G	H	J	K	L	M
MIN./STD.	600	250	10	15	50	600	30	111	108	35	194	205
EXPWY.	900	375	15	20	70	1000	35	176	173	55	308	329
SPECIAL	1200	500	20	30	100	1250	50	221	215	75	386	410

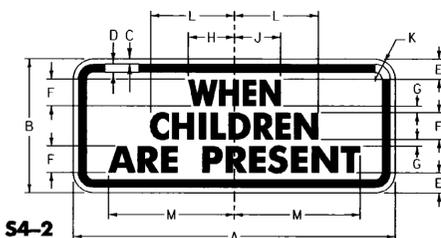


S4-2

SIGN	DIMENSIONS (mm)												
	A	B	C	D	E	F	G	H	J	K	L	M	
MIN./STD.	600	250	10	15	35	500	15	89	116	35	159	237	
EXPWY.	900	375	15	20	55	750	20	131	129	35	237	356	
SPECIAL	1200	500	20	30	75	1000	25	179	170	75	317	473	

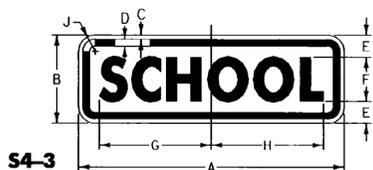

S4-3


SIGN	DIMENSIONS (mm)									
	A	B	C	D	E	F	G	H	J	
MIN./STD.	600	200	10	15	50	1000	253	260	35	
EXPWY.	900	300	15	20	75	1500	379	390	55	
SPECIAL	1200	400	20	30	100	2000	509	522	75	

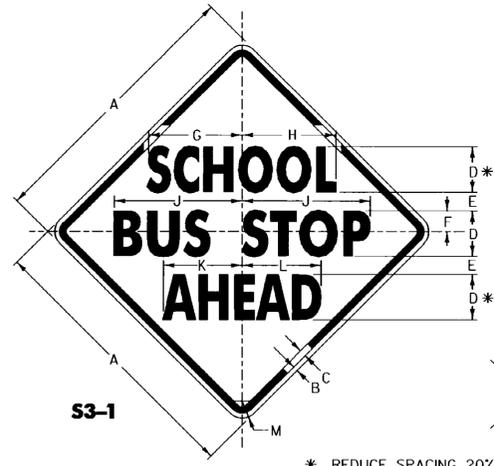

S3-1

* REDUCE SPACING 20%
 ** REDUCE SPACING 15%

SIGN	DIMENSIONS (mm)												
	A	B	C	D	E	F	G	H	J	K	L	M	
MIN./STD.	750	10	20	125C	50	60	249	262	355	205	226	45	
EXPWY.	900	15	20	150C	75	75	294	321	431	246	272	55	

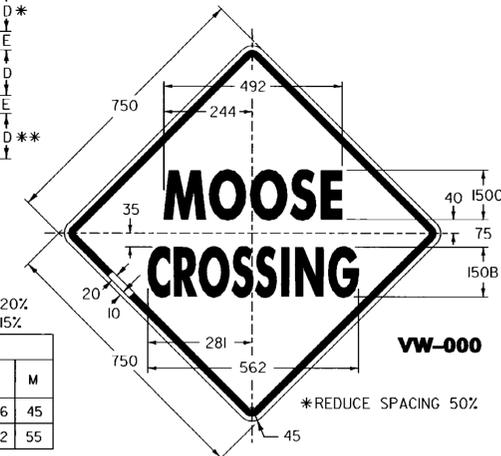

VW-000

*REDUCE SPACING 50%

REVISIONS AND CORRECTIONS

JUNE 13, 1997 - ORIGINAL APPROVAL DATE

APPROVED

Art Cunn
 DIRECTOR OF ENGINEERING
 Gordon S. MacCutler
 DIRECTOR OF CONSTRUCTION AND MAINTENANCE

WARNING SIGN
 DETAILS

OTHER STDS.
 REQUIRED:

NOTE: ALL DIMENSIONS ARE IN MILLIMETERS (mm) EXCEPT WHERE NOTED.



Metric
 STANDARD
 E-153M