




W5-1


• REDUCE SPACING BY 25%

SIGN	DIMENSIONS (mm)										
	A	B	C	D	E	F	G	H	J	K	L
MIN	750	10	20	125D	75	45	199	220	374	384	45
STD	900	15	20	150D	95	50	240	262	446	462	55
SPECIAL	1200	20	30	200D	100	75	322	350	597	620	75

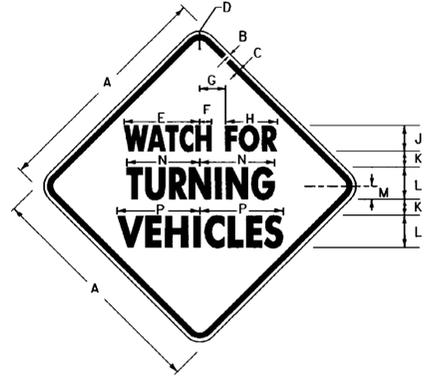


VW-205

SIGN	DIMENSIONS (mm)													
	A	B	C	D	E	F	G	H	J	K	L	M	N	P
MIN	750	10	20	45	242	40	85	161	100B	50	125B	50	236	261
STD	900	15	20	55	299	50	100	204	100C	60	125C	50	291	326
SPECIAL	1200	20	30	75	372	60	135	254	125C	85	200B	65	375	415

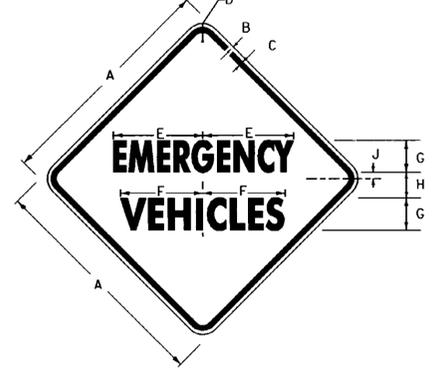

VW-544

SIGN	DIMENSIONS (mm)									
	A	B	C	D	E	F	G	H	J	
MIN	750	10	20	45	324	262	100C	85	20	
STD	900	15	20	55	404	326	125C	100	25	
SPECIAL	1200	20	30	75	485	392	150C	135	35	

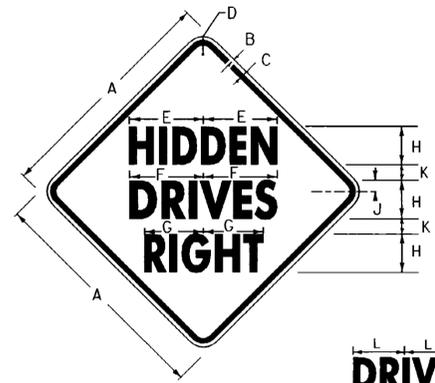

VW-054



VW-133


SIGN	DIMENSIONS (mm)											
	A	B	C	D	E	F	G	H	J	K	L	M
MIN	600	10	15	35	195	194	156	100C	30	50	157	124
STD	750	10	20	45	243	241	195	125C	35	50	196	156
EXPWY.	900	15	20	55	291	290	234	150C	45	60	236	186
SPECIAL	1200	20	30	75	390	387	313	200C	60	80	315	249



W5-2

• REDUCE SPACING BY 20%


SIGN	DIMENSIONS (mm)									
	A	B	C	D	E	F	G	H	J	
MIN	600	10	15	100D	5	50	264	221	35	
STD	750	10	20	125D	10	60	331	276	45	
SPECIAL	900	15	20	150D	20	75	396	331	55	

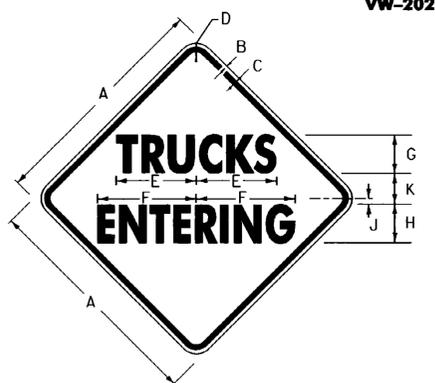

VW-202


• REDUCE SPACING BY 20%

SIGN	DIMENSIONS (mm)										
	A	B	C	D	E	F	G	H	J	K	
MIN	750	10	20	45	263	309	125C	125C	20	100	
STD	900	15	20	55	316	390	150C	150C	20	105	
SPECIAL	1200	20	30	75	422	521	200C	200C	30	160	

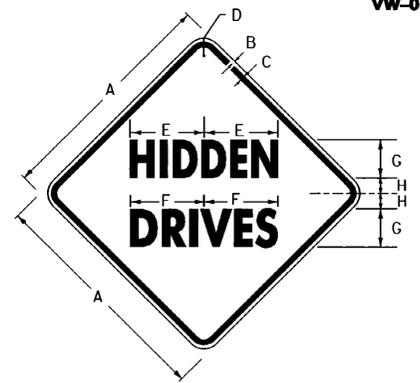

VW-060

SIGN	DIMENSIONS (mm)							
	A	B	C	D	E	F	G	H
MIN	600	10	15	35	195	194	100C	50
STD	750	10	20	45	243	241	125C	50
EXPWY.	900	15	20	55	291	290	150C	60
SPECIAL	1200	20	20	75	390	387	200C	80

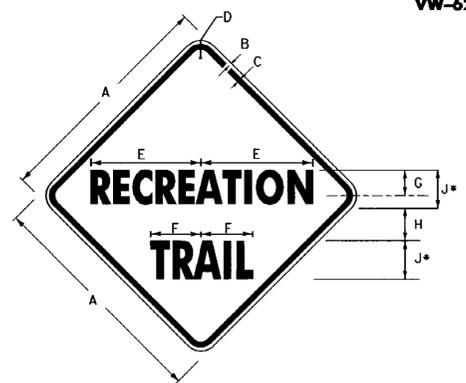

VW-622

• REDUCE SPACING BY 50%

SIGN	DIMENSIONS (mm)									
	A	B	C	D	E	F	G	H	J	
MIN	600	10	15	35	295	136	65	85	100C	
STD	750	10	20	45	367	169	85	105	125C	
SPECIAL	900	15	20	55	440	203	100	125	150C	

**COLORS**  
ALL OF THE WARNING SIGNS SHOWN ON THIS SHEET SHALL HAVE BLACK TEXT AND SYMBOLS ON REFLECTORIZED YELLOW BACKGROUND, EXCEPT AS OTHERWISE NOTED. THE COLORS SHALL CONFORM WITH THE COLORS ADOPTED BY AASHTO AND APPROVED BY THE FHWA.

**MATERIALS**  
THE SIGN BASE MATERIALS USED FOR THE WARNING SIGNS SHOWN ON THIS SHEET MAY BE ANY OF THE FOLLOWING MINIMUM THICKNESSES NOTED:

	600 x 600	750 x 750	900 x 900	1200 x 1200
FLAT SHEET ALUMINUM	2.03 mm	2.54 mm	3.18 mm	
HIGH DENSITY OVERLAID PLYWOOD	13 mm	16 mm	16 mm	
GALVANIZED FLAT SHEET STEEL	1.63 mm	2.01 mm	2.77 mm	

THE TEXT, BORDER AND SYMBOLS SHALL BE LETTERING FILM, SILK SCREENED OR HAND PAINTED. WHEN HAND PAINTED, POOR WORKMANSHIP SHALL BE CAUSE FOR REJECTION. THE REFLECTIVE MATERIAL SHALL BE REFLECTIVE SHEETING APPLIED TO THE ENTIRE BACKGROUND OF THE SIGN. ENCAPSULATED LENS REFLECTIVE SHEETING SHALL BE USED FOR THE SIGN BACKGROUND WHERE NOTED.

**TEXT DESIGN**  
LETTERS, DIGITS, SYMBOLS, SPACINGS AND TEXT SHALL CONFORM TO THE LATEST VERSION OF FHWA'S "STANDARD ALPHABETS FOR HIGHWAY SIGNS AND PAVEMENT MARKINGS". DESIGNS SHALL CONFORM WITH THOSE PRESCRIBED IN THE MUTCD.

**SPECIFICATIONS**  
WARNING SIGNS SHALL MEET THE VERMONT STANDARD SPECIFICATIONS FOR "TRAFFIC SIGNS" AS PRESCRIBED IN THE VAOT STANDARD SPECIFICATIONS FOR CONSTRUCTION.

**OTHER STDS. REQUIRED:**  
NOTE: ALL DIMENSIONS ARE IN MILLIMETERS (mm) EXCEPT WHERE NOTED.

REVISIONS AND CORRECTIONS  
JUNE 13, 1997 - ORIGINAL APPROVAL DATE

APPROVED  
*Paul C. ...*  
DIRECTOR OF ENGINEERING  
*Stephen B. MacArthur*  
DIRECTOR OF CONSTRUCTION AND MAINTENANCE

WARNING SIGN  
DETAILS



**Metric**  
STANDARD  
E-154M