




ESSEX STP WALK (9)

ESSEX CENTER SIDEWALK ESSEX, VERMONT

LENGTH OF PROJECT IS 1761 FEET = 0.33 MILES


THE PROJECT BEGINS IN ESSEX AT THE INTERSECTION OF VERMONT ROUTES 15 AND 128, AND PROCEEDS SOUTHEASTERLY FOR A DISTANCE OF 1,761 FEET ALONG VERMONT ROUTE 15 AND SAND HILL ROAD.

WORK TO BE PERFORMED UNDER THIS PROJECT INCLUDES NEW CONCRETE SIDEWALK, CATCH BASINS, FENCING, ROADWAY WIDENING, NEW BASE, ASSOCIATED PAVEMENT MARKINGS, SIGNS, AND INCIDENTAL ITEMS.

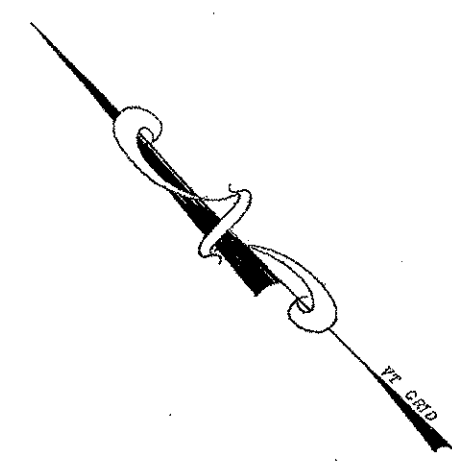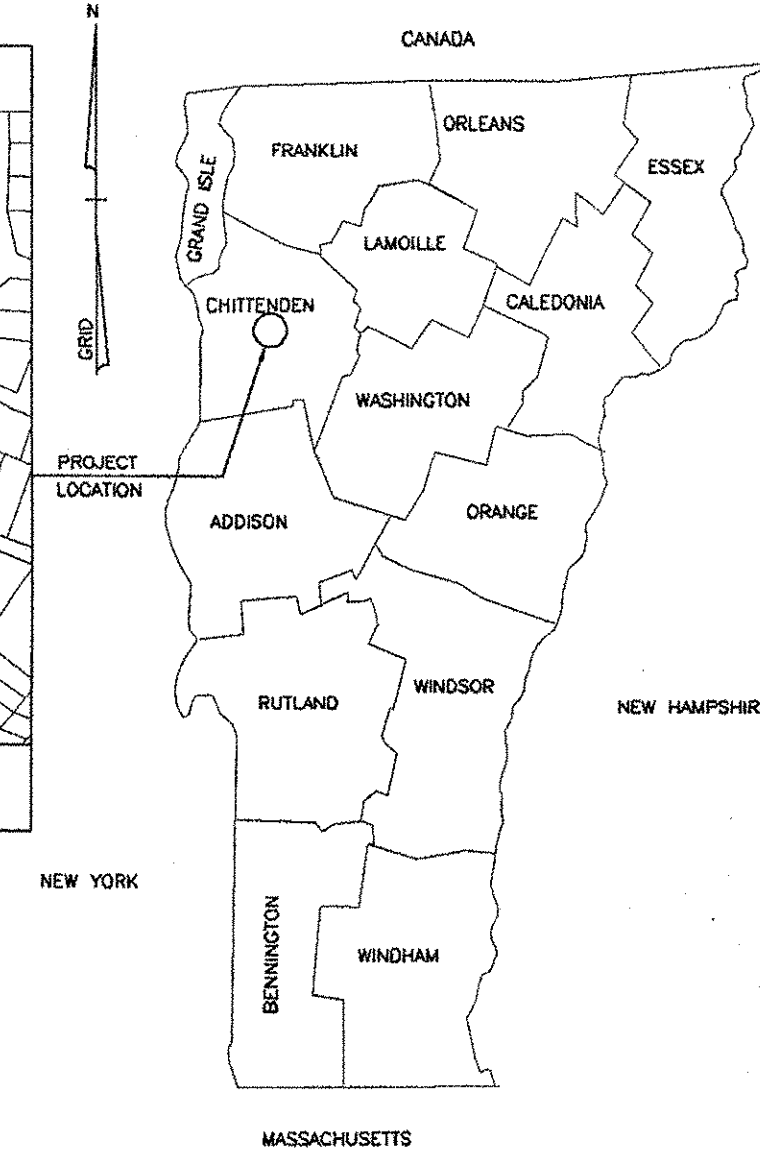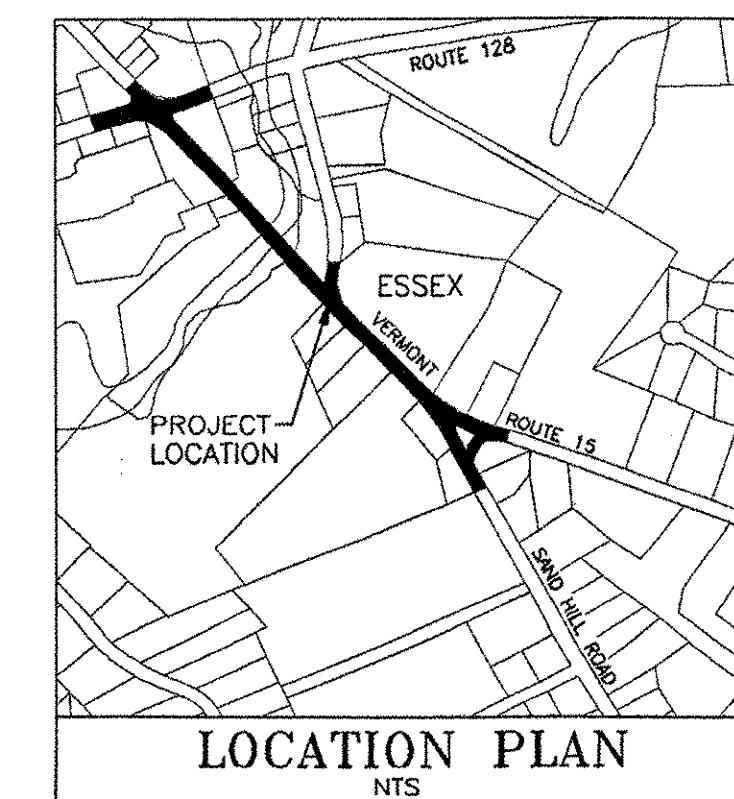


BEGIN PROJECT
STA. 0+92

THE CONTRACTOR SHALL NOTIFY "DIGSAFE" AT
1-888-DIG-SAFE PRIOR TO ANY EXCAVATION.

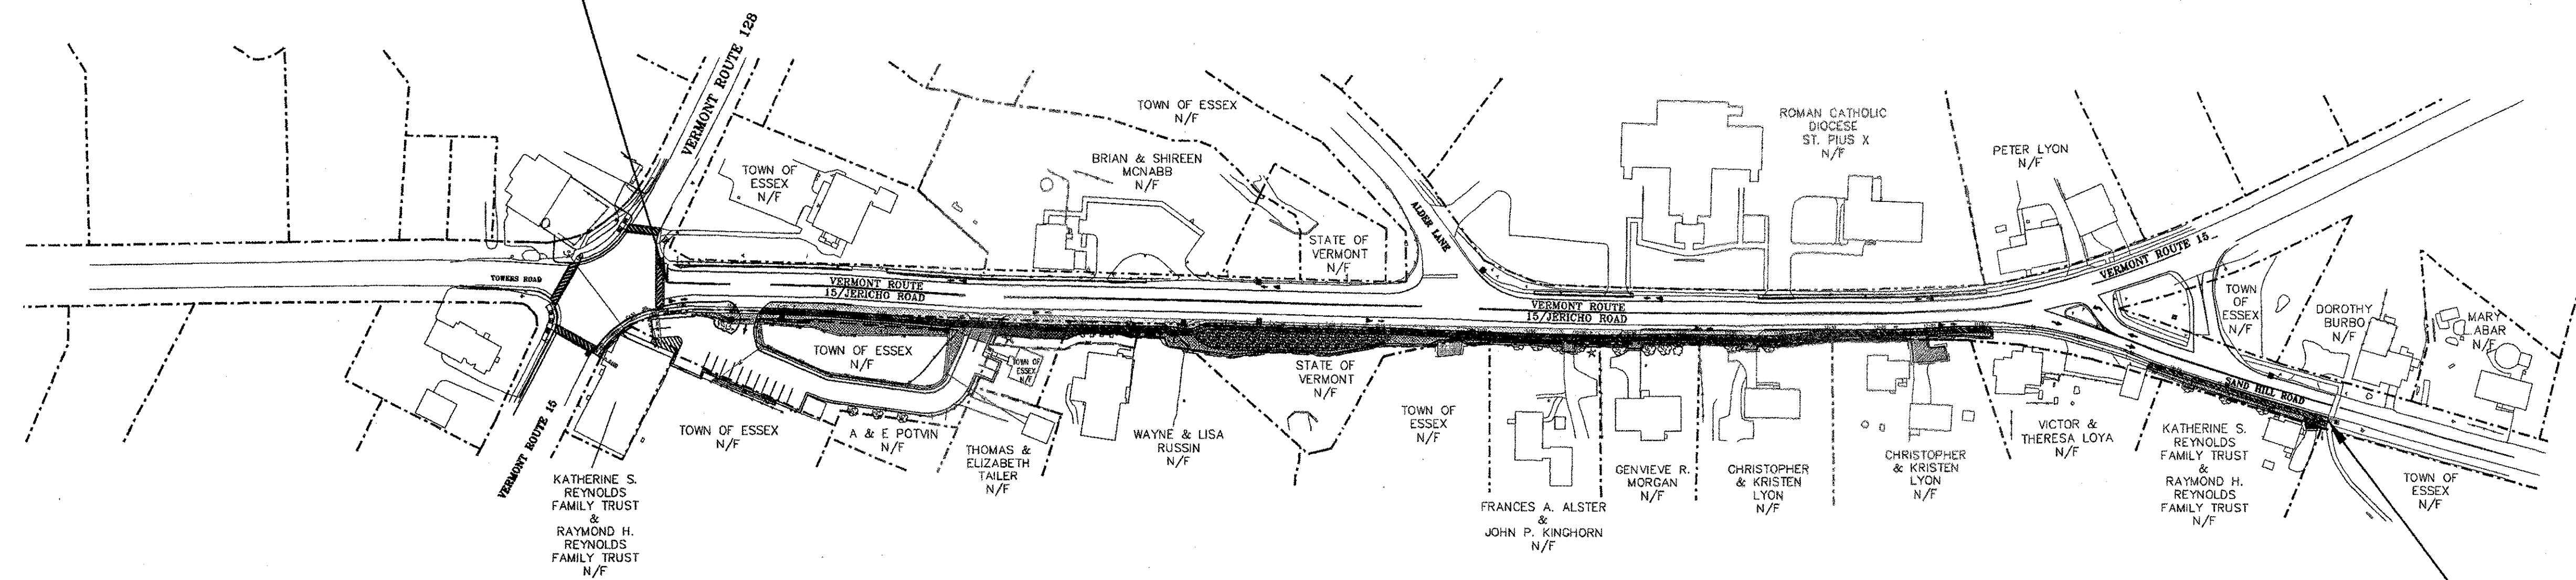

END PROJECT
STA. 17+60.43

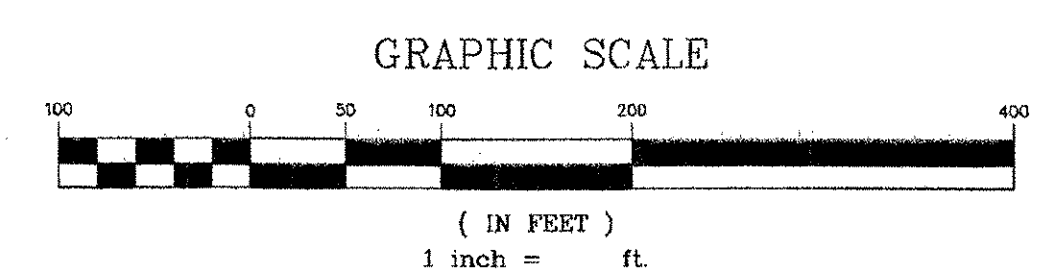

EROSION PREVENTION & SEDIMENT CONTROL PLANS

INDEX OF SHEETS

SHEET #	TITLE	DATE
25A	EROSION AND SEDIMENT CONTROL TITLE SHEET	
25B	DESIGNER EROSION PREVENTION AND SEDIMENT CONTROL CHECKLIST	
25C	EXISTING CONDITIONS PLAN STA. 0+00 TO STA. 5+75	
25D	EXISTING CONDITIONS PLAN STA. 5+75 TO STA. 12+25	
25E	EXISTING CONDITIONS PLAN STA. 12+25 TO STA. 17+61.22	
25F	EROSION PREVENTION AND SEDIMENT CONTROL PLAN STA. 0+00 TO STA. 5+75	
25G	EROSION PREVENTION AND SEDIMENT CONTROL PLAN STA. 5+75 TO STA. 12+25	
25H	EROSION PREVENTION AND SEDIMENT CONTROL PLAN STA. 12+25 TO STA. 17+61.22	
25J	FINAL CONDITIONS PLAN STA. 0+00 TO STA. 5+75	
25K	FINAL CONDITIONS PLAN STA. 5+75 TO STA. 12+25	
25L	FINAL CONDITIONS PLAN STA. 12+25 TO STA. 17+61.22	
EPSC-1	EROSION PREVENTION & SEDIMENT CONTROL DETAILS - SILT FENCE	5-12-04
EPSC-2	EROSION PREVENTION & SEDIMENT CONTROL DETAILS - DROP INLET PROTECTION	5-11-04
EPSC-3	EROSION PREVENTION & SEDIMENT CONTROL DETAILS - DITCH & SLOPE PREVENTION	5-11-04

THE CONTRACTOR SHALL PROVIDE THE FOLLOWING INFORMATION FOR APPROVAL AND INCLUSION IN THE EROSION AND SEDIMENT CONTROL PLANS:

THE LOCATION OF WASTE, BORROW AND STAGING AREAS, MATERIAL STOCKPILES, REFUELING AND MAINTENANCE AREAS AND CONCRETE TRUCK WASHOUT LOCATION (ATTACH MAP IF NECESSARY).

DISCUSSION AND ADDITIONAL DETAILS NEEDED FOR THE PROTECTION AND STABILIZATION OF THE ABOVE.

FINAL MODIFICATIONS AS/ IF REQUIRED TO THESE EROSION AND SEDIMENT CONTROL PLANS.

FINAL DATES ASSOCIATED WITH JOB MILESTONES AS INDICATED ON THE SEQUENCE CONSISTENT WITH PROJECT CPM SCHEDULE.

NAME, PHONE NUMBER, ADDRESS AND QUALIFICATIONS OF ON-SITE COORDINATOR.

INFORMATION SHALL BE CONSISTENT WITH GUIDANCE PROVIDED IN THE LATEST REVISION OF THE VERMONT HANDBOOK FOR THE EROSION AND SEDIMENT CONTROL ON CONSTRUCTION SITES.

NOTE:
THESE PLANS ARE SUBJECT TO SUCH ENGINEERING CHANGES AS MAY BE REQUIRED BY THE FEDERAL HIGHWAY ADMINISTRATION OR THE TOWN ENGINEER. CONSTRUCTION IS TO BE CARRIED ON IN ACCORDANCE WITH THESE PLANS AND THE VERMONT STANDARD SPECIFICATIONS FOR CONSTRUCTION DATED 2001, AS APPROVED BY THE FEDERAL HIGHWAY ADMINISTRATION ON JANUARY 4, 2001 FOR USE ON THIS PROJECT, INCLUDING ALL SUBSEQUENT REVISIONS AND SUCH REVISED SPECIFICATIONS AND SPECIAL PROVISIONS AS ARE INCORPORATED IN THESE PLANS.

FUNDING ASSISTANCE FOR THIS PROJECT IS
BEING FURNISHED BY VTRANS AND FHWA

TOWN OF ESSEX	DATUM
APPROVED _____ DATE _____	VERTICAL NAVD 1988
TOWN ENGINEER	HORIZONTAL NAD 1983

CONTRACT PLANS 10-20-05

DATE	REVISION	BY
10-20-05	REVISED FOR CONTRACT PLANS	BH/DH
09-09-05	REVISED FOR FINAL PLANS	BH/DB/DH

THESE PLANS WITH LATEST REVISIONS SHOULD ONLY BE USED FOR THE PURPOSE SHOWN BELOW:

**STP WALK (9)
TOWN OF ESSEX
ROUTE 15 IN ESSEX CENTER, VT**

**OVERALL EROSION
CONTROL PLAN**

pro. no. 02-132
survey L&D/OTHERS
design DLH/LAL
drawn DB
checked LAL/DLH
date 03/01/04
scale 1" = 100'
sht. no. 25A

L LAMOUREUX & DICKINSON
Consulting Engineers, Inc.
14 Morse Drive
Essex Junction, VT 05452
Tel: 802-878-4450