


WHITCOMB CONSTR.  
 WHESTONE BROOK PATH  
 PEDESTRIAN BRIDGE  
 BEDFORD, VT

**TYPICAL BRIDGE INSTALLATION PROCEDURE**

1. FIELD VERIFY CORRECT ANCHOR BOLT LOCATIONS.
2. ASSEMBLE BRIDGE HALVES PER SPLICE CONNECTION DETAIL AS SHOWN ON BRIDGE DRAWINGS.
3. ATTACH LIFTING STRAPS AROUND BRIDGE BOTTOM CROSS MEMBERS AT LIFT POINTS AS SHOWN IN DIAGRAM. FLOOR PLANKS AT LIFT POINTS WILL BE SHIPPED LOOSE.
4. SECURE AND CHECK THAT ALL LIFTING EQUIPMENT IS IN GOOD WORKING CONDITION AND CAN SAFELY SUPPORT THE TOTAL BRIDGE WEIGHT.
5. LIFT AND MOVE BRIDGE STRUCTURE AND SET BRIDGE BASE PLATES ONTO SLIP PADS AND ANCHOR BOLTS.
6. INSTALL ANCHOR BOLT WASHERS AND NUTS.
7. VISUALLY INSPECT THE BRIDGE FOR ANY DAMAGE TO THE FINISH AND APPLY TOUCH UP PAINT IF REQUIRED.
8. INSTALL FLOOR DECK PLANKS AT LIFT POINT AREAS.
9. SPREADER BAR AND LIFTING APPARATUS IS SHOWN CONCEPTUALLY. CONTRACTOR IS RESPONSIBLE FOR ALL HOISTING REQUIREMENTS.

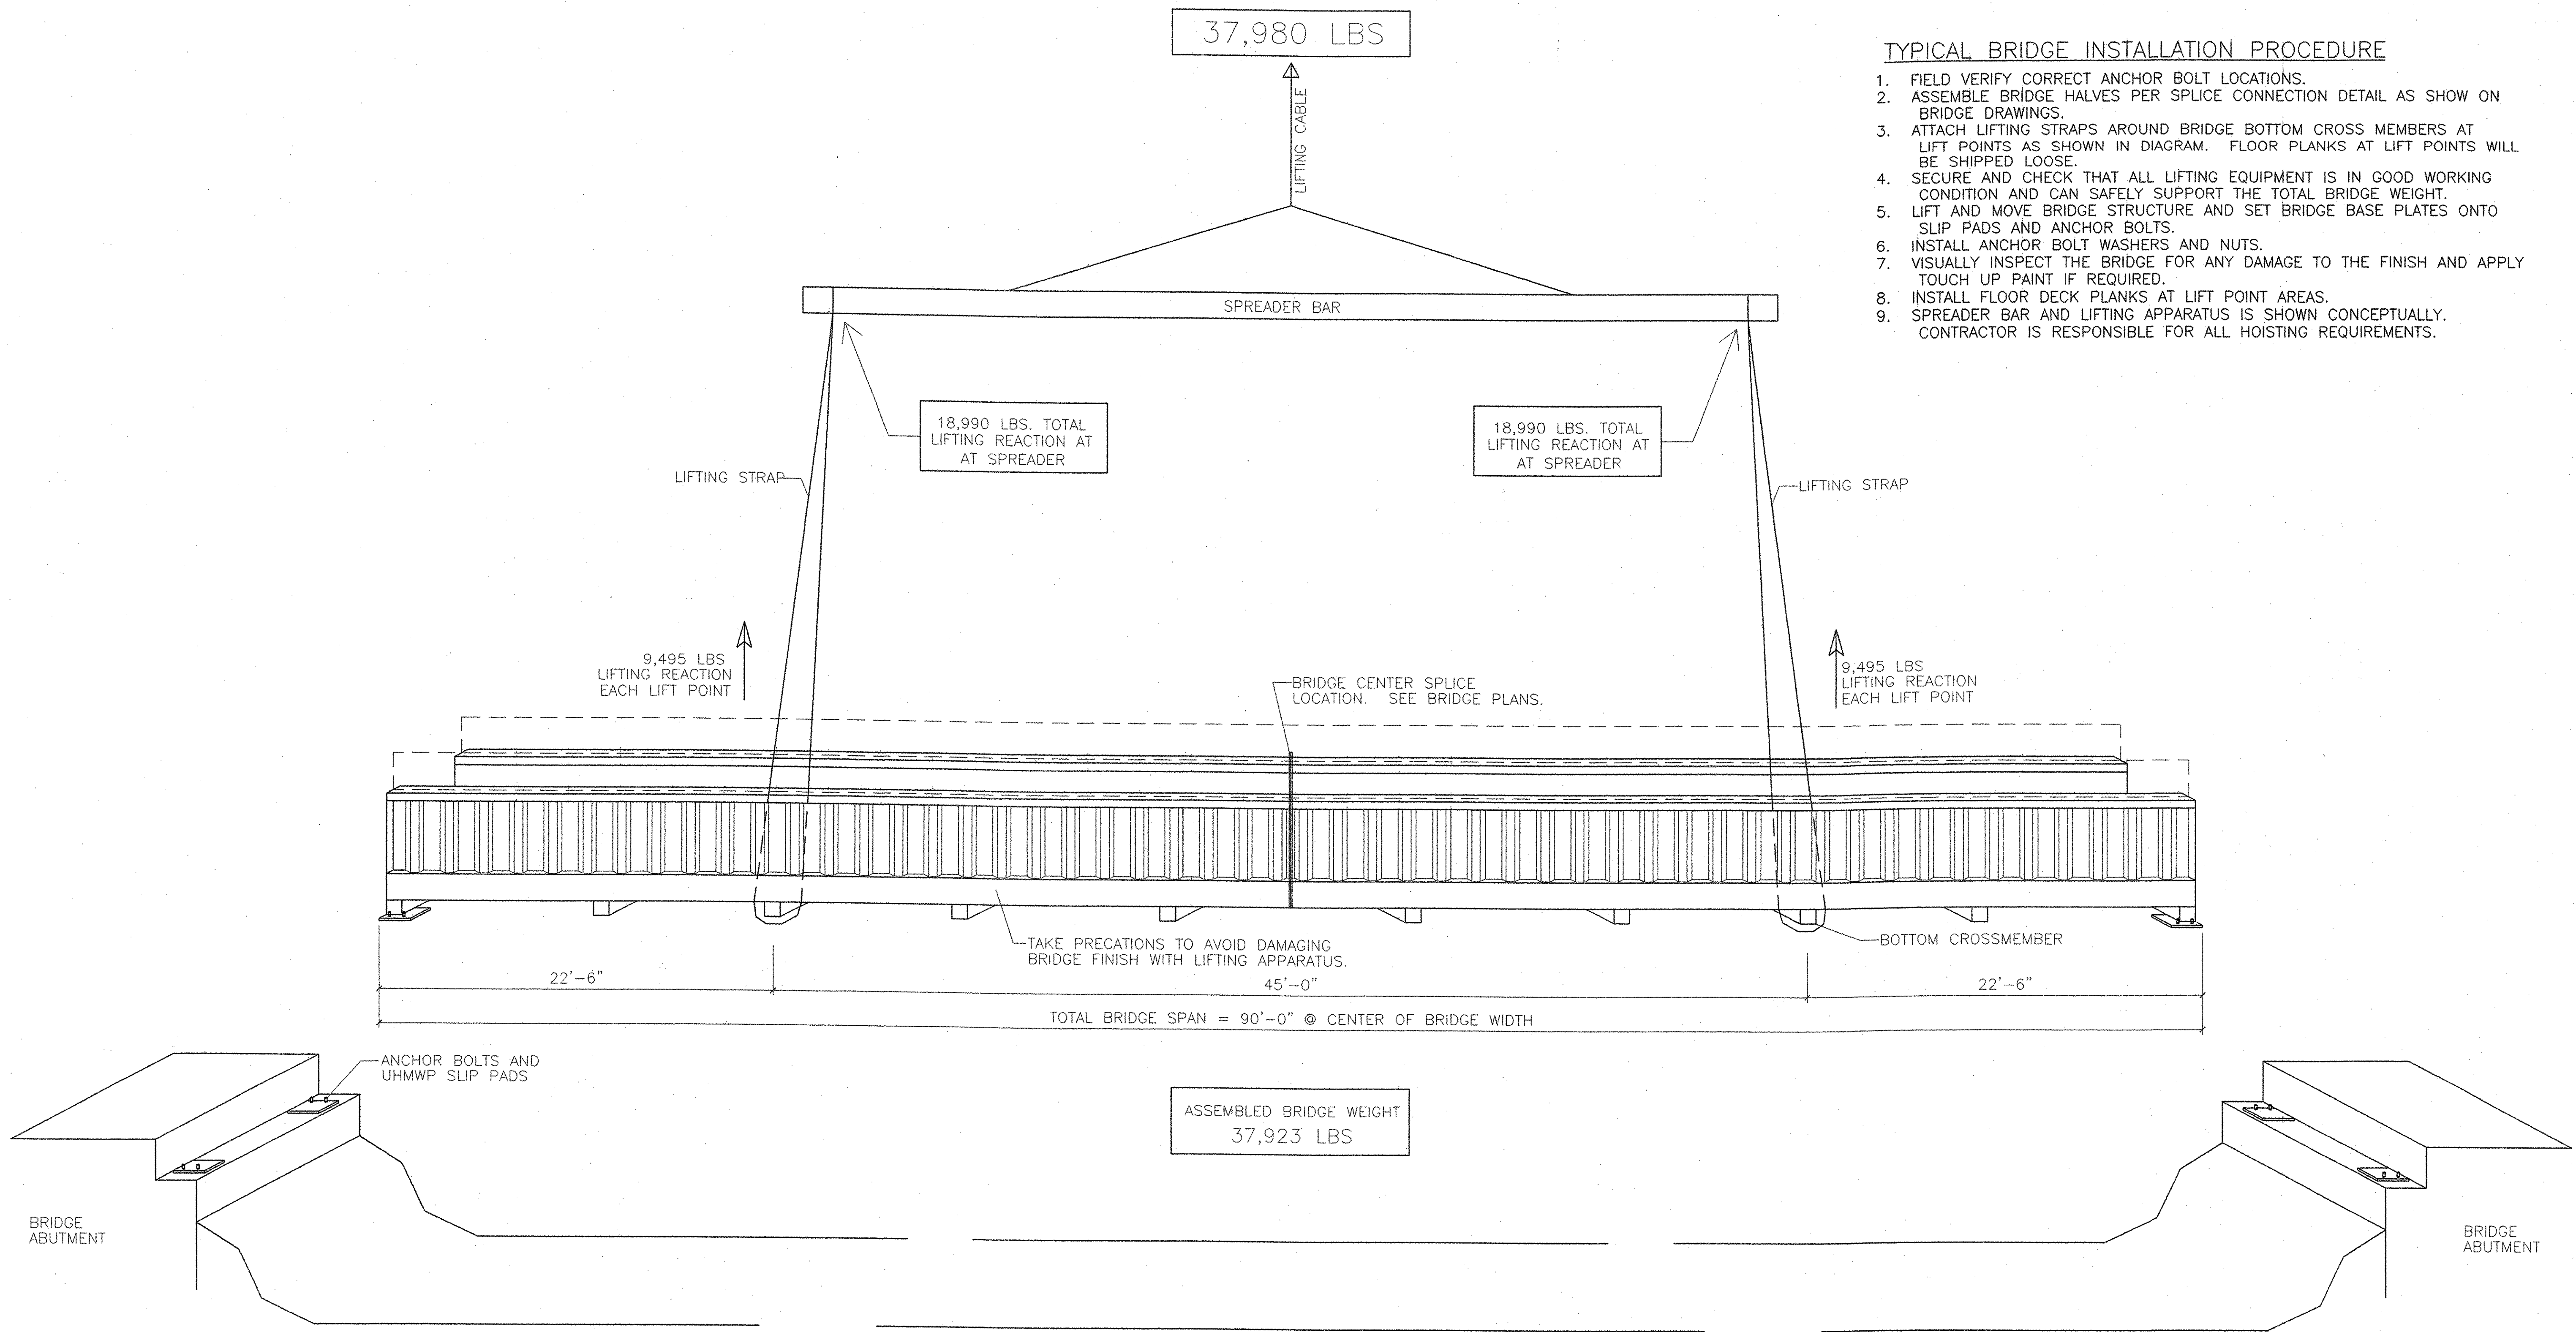

REV.	DATE	DESCRIPTION
0	2/8/05	INSTALLATION INSTRUCTIONS


**BIG R**  
 MANUFACTURING, LLC  
 PO BOX 1290  
 GREELEY, COLORADO  
 (970) 356 9600  
 PH: (970) 356 9601  
 FAX: (970) 356 9602

DRAWN:	MDS
DATE:	1/14/05
CHECKED:	SFP
DATE:	1/14/05
APPROVED:	SFP

REV. 0

PROJECT NO. 24-115E

SHEET NO. INST 1



NOTICE: THIS DRAWING IS THE SOLE PROPERTY OF EAGLESPAN STEEL STRUCTURES, INC. IT IS TO BE USED FOR PURPOSES AUTHORIZED AND SHALL NOT BE REPRODUCED, COPIED, OR USED WITHOUT THE WRITTEN PERMISSION OF EAGLESPAN STEEL STRUCTURES, INC. AND IS SUBJECT TO IMMEDIATE RETURN ON DEMAND. COPYRIGHT 2005 ALL RIGHTS RESERVED.