



**COMPONENT ROPE**

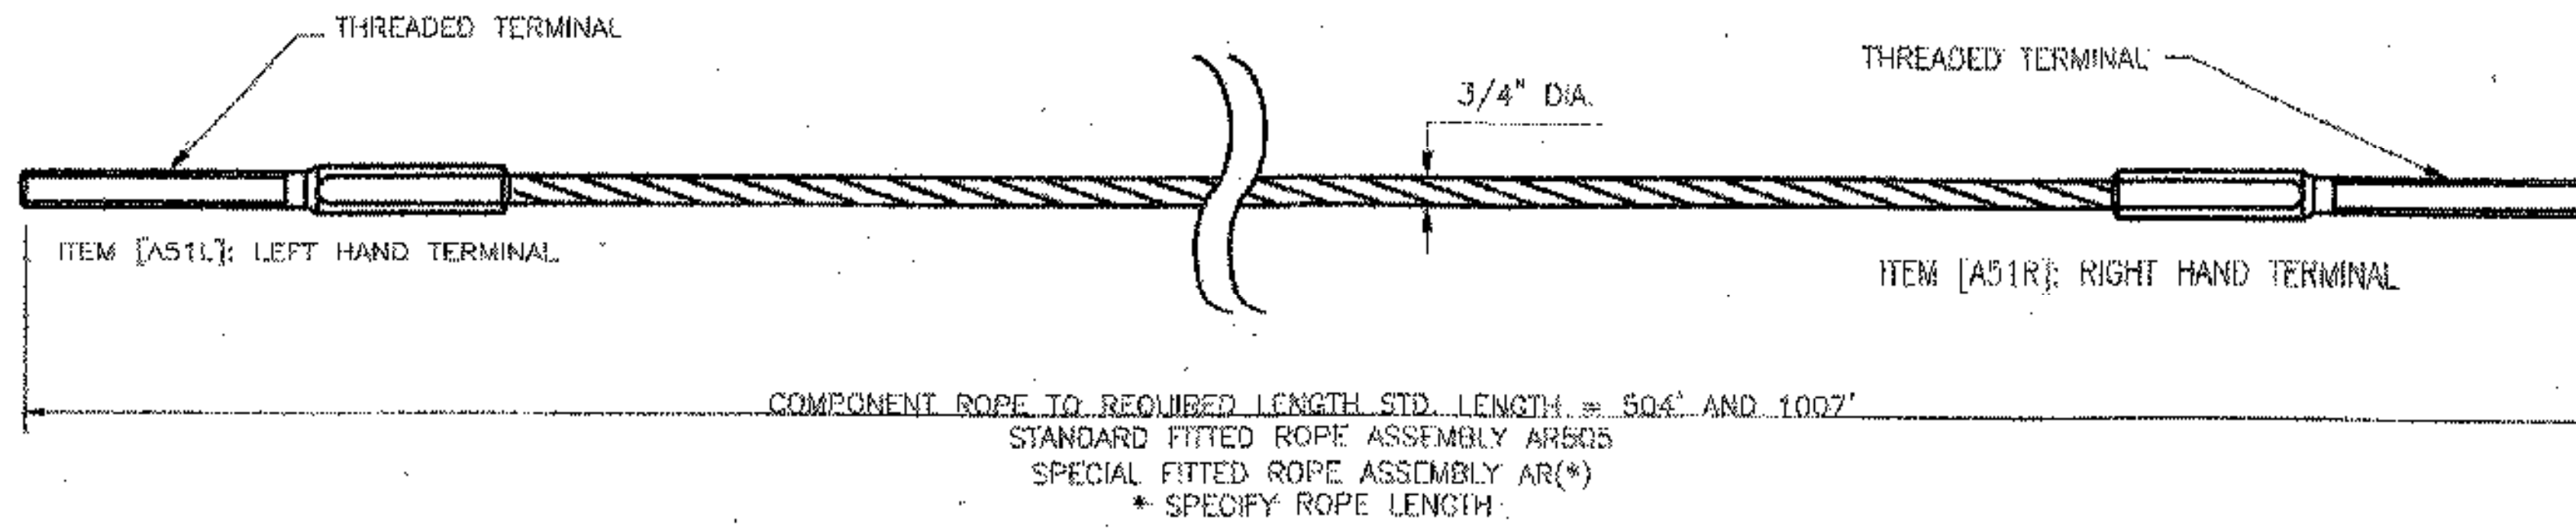


**TAIL ROPE**

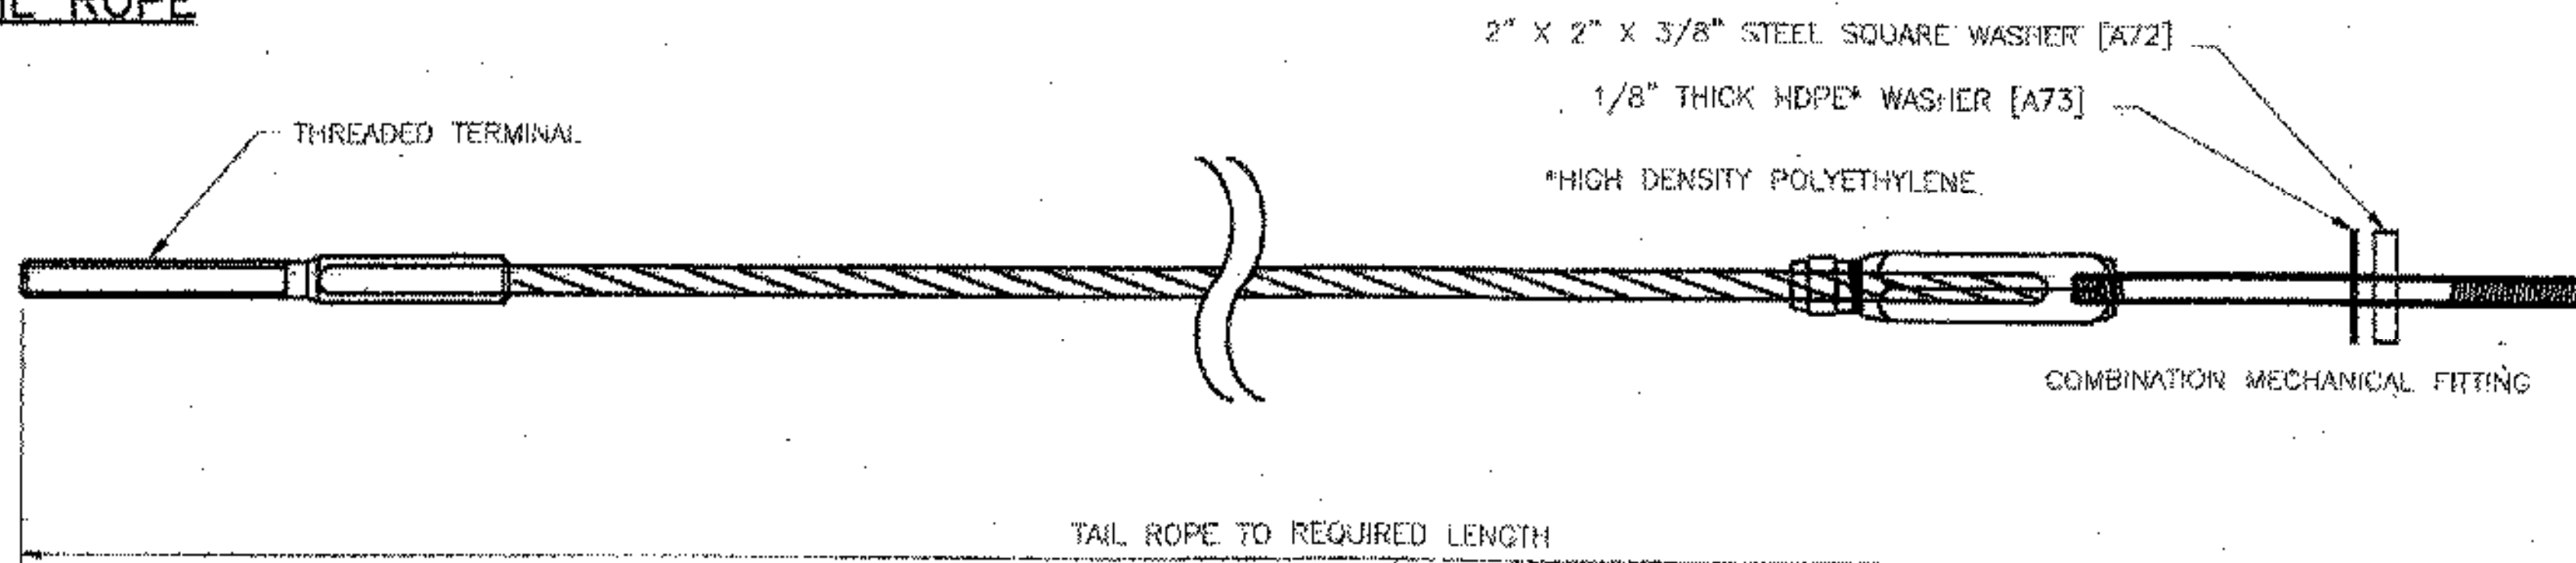


**NOTES:**

1. BRIFEN WIRE ROPE TO BE 3/4" (19mm) PRE-STRETCHED 3 X 7 CONSTRUCTION.
2. MINIMUM BREAKING LOAD OF FITTED ROPES SHALL BE 38,800 POUNDS (16.7 TONNE F METRIC).
3. COMBINATION MECHANICAL FITTING SHALL DEVELOP MINIMUM BREAKING LOAD AS STATED IN NOTE 2.
4. RIGGING SCREWS SHALL NOT BE LOCATED BETWEEN END ANCHORAGE AND TYPE POST 'A'.
5. WIRE ROPES ARE TO BE TENSIONED AFTER INSTALLATION AND RE-CHECKED AFTER 2-3 WEEKS.

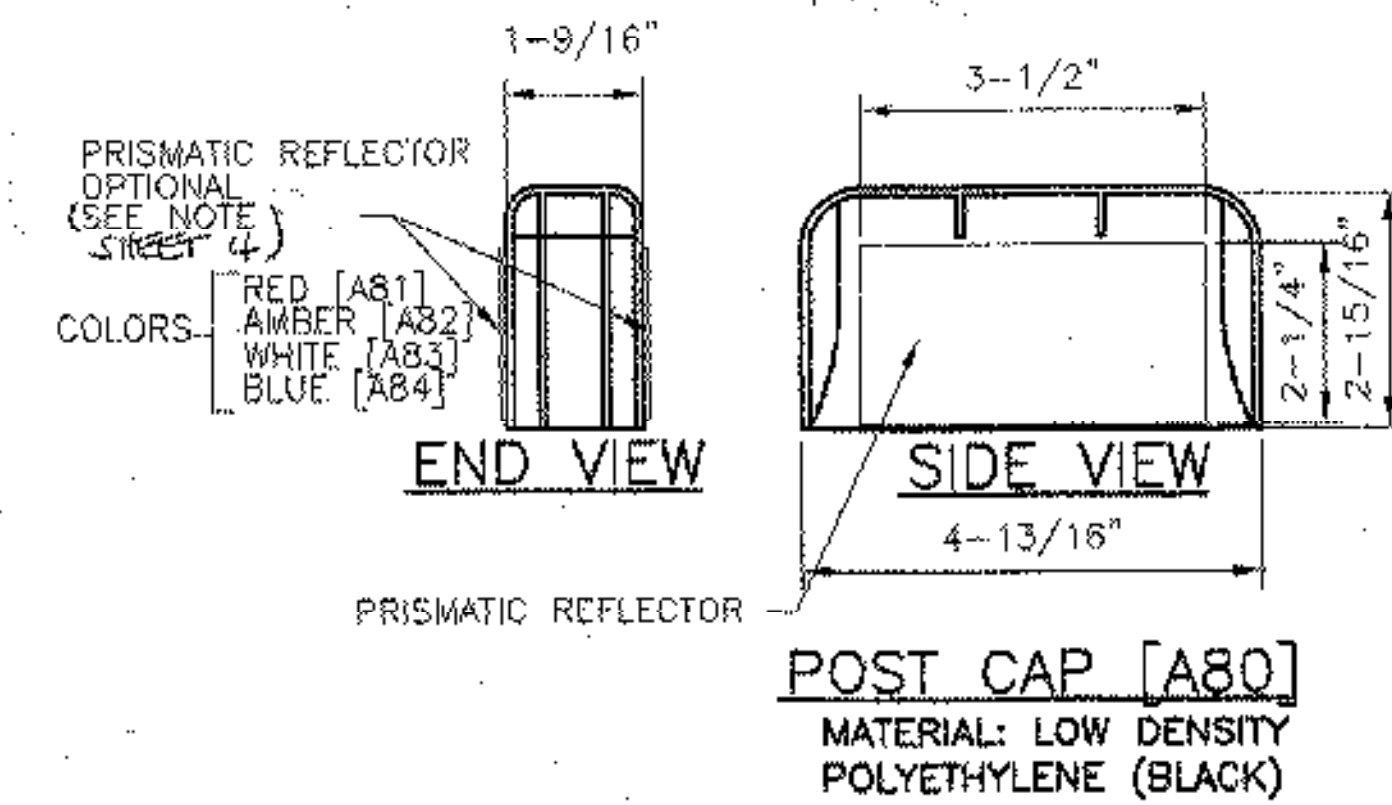

**RIGGING SCREW [A52]  
(TURNBUCKLE)**

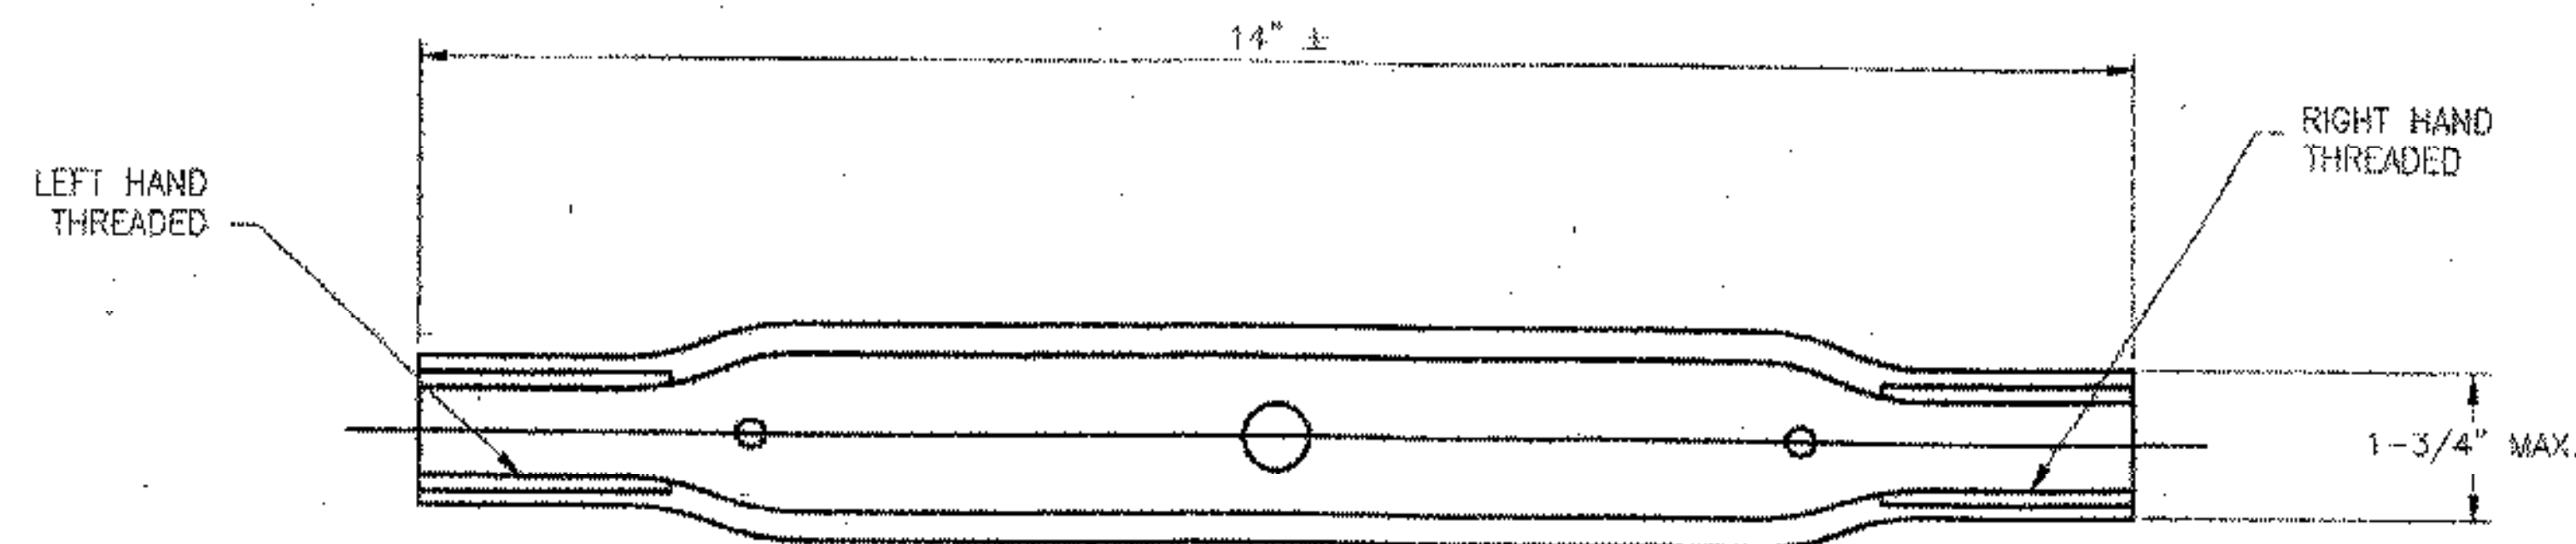

The information herein is proprietary to BRIFEN USA, and shall not be disclosed, duplicated or used otherwise without the express written consent of BRIFEN USA, Inc.

**BRIFEN★USA INC.**

Revisions			WIRE ROPE AND FITTINGS		
No.	Date	By	Date	Drawn By	Scale
1.	7.21.05	MW	5.17.05	Aaron Wells	None
2.	8.01.05	MW			
3.	8.04.05	MW	VERSION 8.8		
4.	10.10.05	MW			
5.	12.07.05	MW	Dwg. No.	WRSF-05-202a	Sheet No. 7 of 9

**SUPPLEMENTARY DETAIL SHEET  
NOT TO SCALE**