


SPANS 5 & 6 REINFORCEMENT PLAN - NORTHBOUND BRIDGE (33N)

NOTE: SEE REBAR DETAIL SHOP DRAWINGS DEVELOPED BY DIMENSION FOR ACTUAL BAR SPLICE LOCATIONS

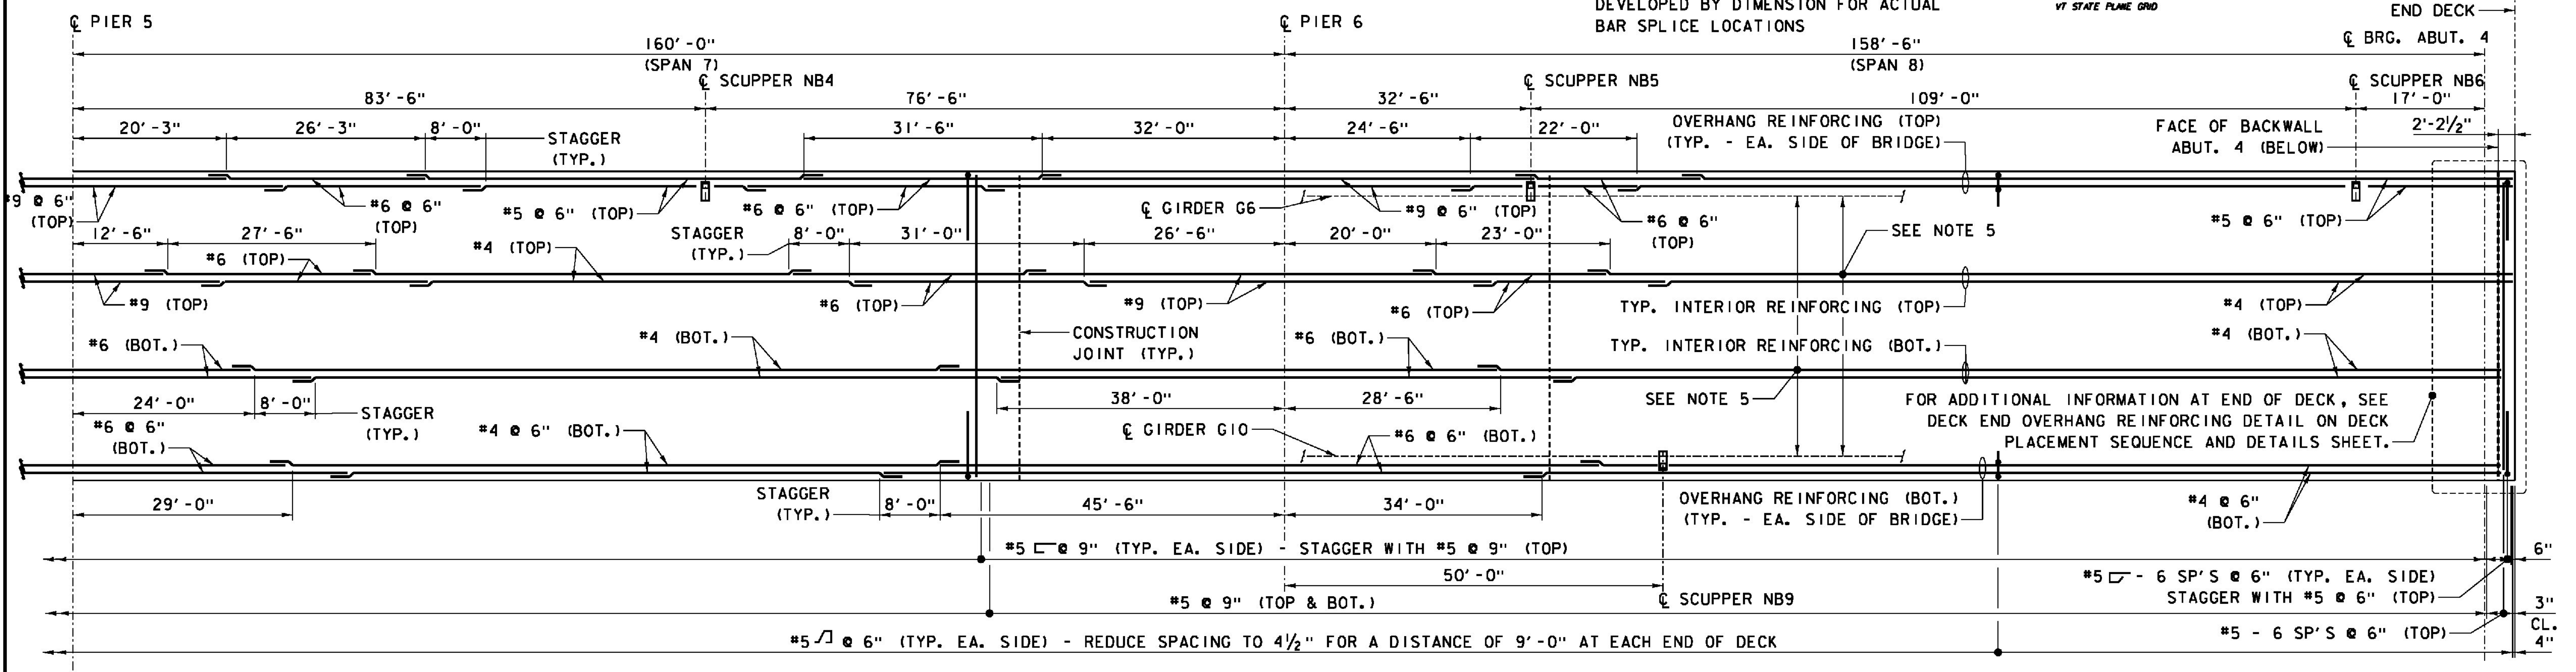

SPANS 7 & 8 REINFORCEMENT PLAN - NORTHBOUND BRIDGE (33N)

SCALE 1" = 10'-0"

- NOTES:**
- ALL REINFORCEMENT STEEL IN CAST-IN-PLACE DECK SHALL BE STAINLESS STEEL AND CONFORM TO ASTM A995M, GRADE 420 (GRADE 60).
 - FOR DECK CONSTRUCTION JOINT LOCATIONS, SEE DECK PLACEMENT SEQUENCE AND DETAILS SHEET.
 - FOR TYPICAL SECTION AT ABUTMENTS, SEE GIRDER DETAILS 3 SHEET.
 - FOR ADDITIONAL REINFORCEMENT AT SCUPPERS, SEE DECK PLACEMENT SEQUENCE AND DETAILS SHEET.
 - FOR TYPICAL LONGITUDINAL REINFORCING LAYOUT SPACING, SEE TYPICAL DECK DETAILS SHEET.
 - FOR ADDITIONAL LONGITUDINAL REINFORCING AT SCUPPERS, SEE DETAILS ON BRIDGE DRAINAGE-SHEET 2.

LAP SPLICE TABLE		
BAR SIZE	MIN. LENGTH	LAP
4	2'-0"	
5	2'-6"	
6	3'-0"	
9	4'-8"	

ITEMS USED ON THIS SHEET	
ITEM NO.	DESCRIPTION
900.608	HIGH PERFORMANCE CONCRETE, CLASS A, LOW CEMENT
900.620	BRIDGE SCUPPER ASSEMBLY
900.635	STAINLESS STEEL REINFORCING

PROJECT NAME: WINDSOR	
PROJECT NUMBER: IM 091-1(64)	
FILE NAME: z10o188DECKR NB.dgn	PLOT DATE: 7/30/2015
PROJECT LEADER: J. WILSON	DRAWN BY: N. GARCIA III
DESIGNED BY: R. PEIN	CHECKED BY: S. HALLORAN
BRIDGE 33N DECK REINFORCEMENT	SHEET 60 OF 156