



ITEMS USED ON THIS SHEET	
ITEM NO.	DESCRIPTION
203.16	SOLID ROCK EXCAVATION
204.25	STRUCTURE EXCAVATION
204.30	GRANULAR BACKFILL FOR STRUCTURES
490.30	SUPERPAVE BITUMINOUS CONCRETE PAVEMENT
501.33	CONCRETE, HIGH PERFORMANCE CLASS A
501.34	CONCRETE, HIGH PERFORMANCE CLASS B
507.16	DRILLING AND GROUTING DOWELS
514.10	WATER REPELLENT, SILANE
529.15	REMOVAL OF STRUCTURE
649.31	GEOTEXTILE UNDER STONE FILL
651.15	SEED
651.25	HAY MULCH
651.35	TOPSOIL

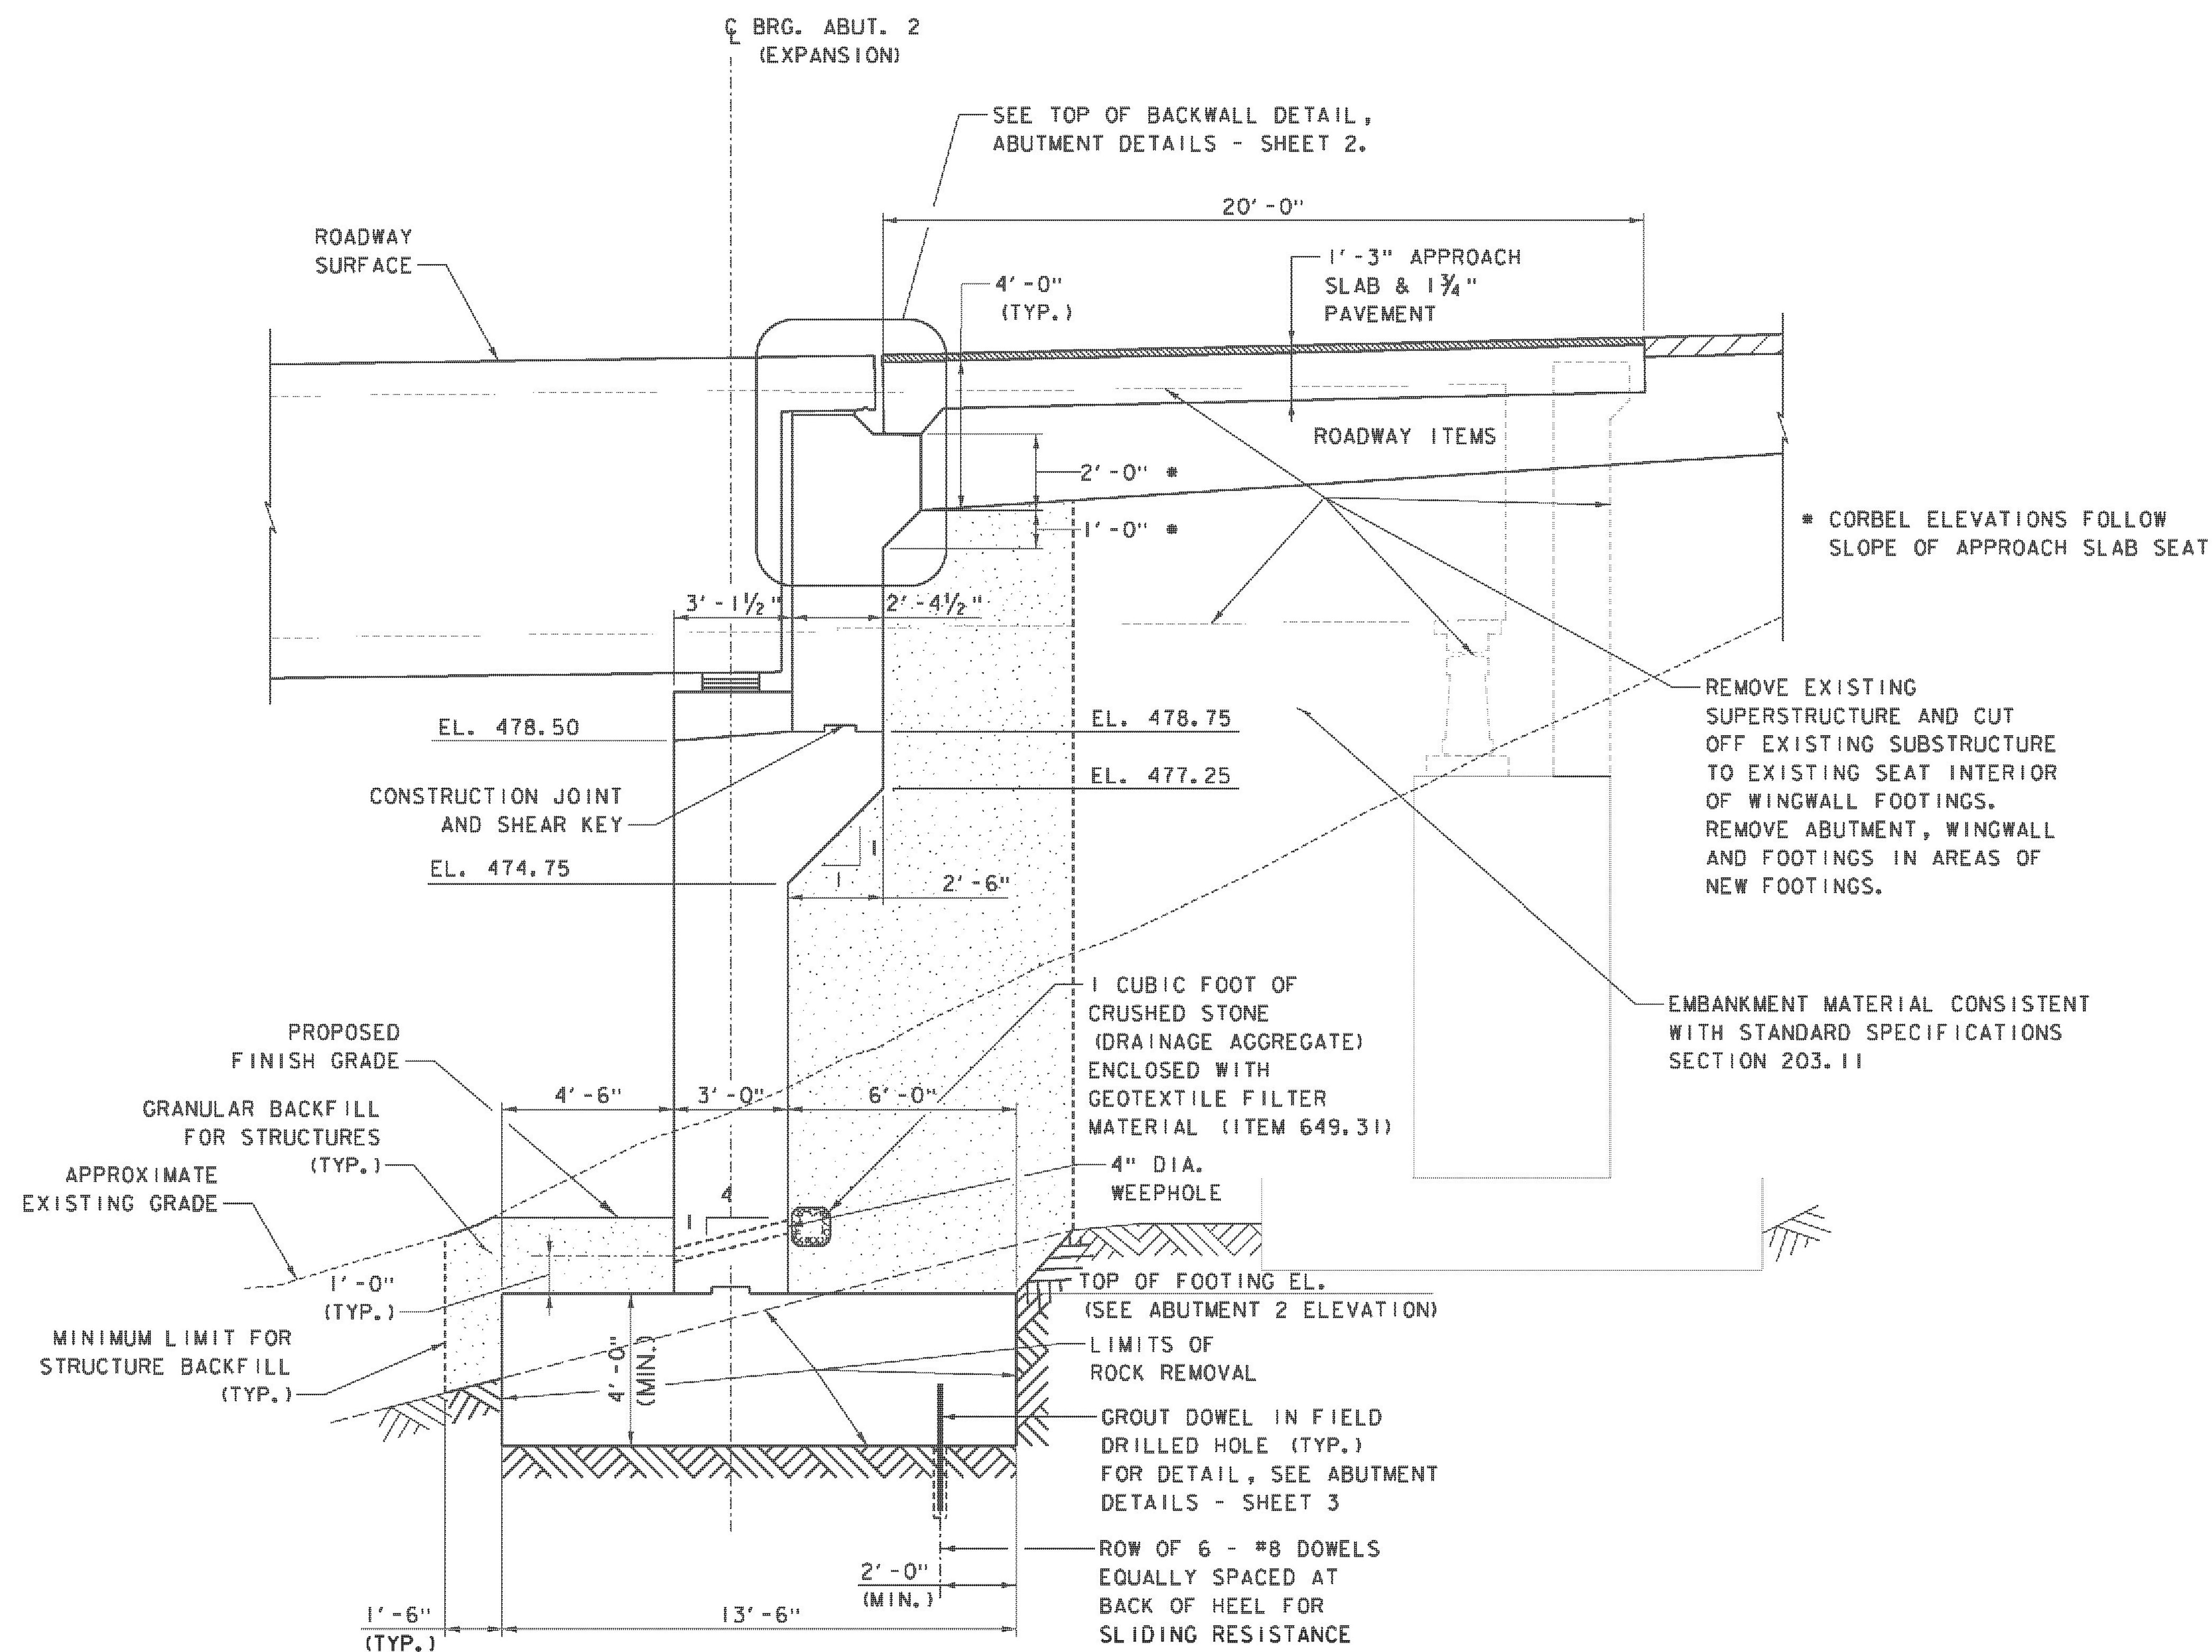

TYPICAL ABUTMENT SECTION

SCALE 3/8" = 1'-0"



NOTES:

1. FOR ABUTMENT 2 FOOTING REINFORCING DETAILS, SEE ABUT. 2 REINFORCEMENT - SHEET 1.
2. FOR ABUTMENT 2 STEM, SEAT AND BACKWALL REINFORCING DETAILS, SEE ABUT. 2 REINFORCEMENT - SHEET 2.
3. FOR CONSTRUCTION JOINT DETAILS, SEE ABUTMENT DETAILS - SHEET 2.
4. EMBANKMENT AREAS DISTURBED BY CONSTRUCTION SHALL BE RESTORED UPON COMPLETION OF THE WORK BY INSTALLING TOPSOIL, SEED AND HAY MULCH.

PROJECT NAME: WINDSOR
PROJECT NUMBER: IM 091-1(64)

FILE NAME: z10t168Abut2S.dgn
PROJECT LEADER: J. WILSON
DESIGNED BY: S. BOYINGTON
ABUTMENT 2 SECTION

PLOT DATE: 7/30/2015
DRAWN BY: S. GUNN
CHECKED BY: S. HALLORAN
SHEET 95 OF 156