

646.622 TEMPORARY 6" WHITE LINE, PAINT
 646.426 DURABLE 6" WHITE LINE, RECESSED POLYUREA
 0.410 TO 0.507 SOLID RT

646.632 TEMPORARY 6" YELLOW LINE, PAINT
 646.436 DURABLE 6" YELLOW LINE, RECESSED POLYUREA
 0.410 TO 0.507 SOLID LT

646.682 TEMPORARY 24" STOP BAR, PAINT
 646.482 DURABLE 24" STOP BAR, THERMOPLASTIC
 0.505 LT TO RT

646.692 TEMPORARY LETTER OR SYMBOL, PAINT
 646.492 DURABLE LETTER OR SYMBOL, THERMOPLASTIC
 0.449 LT - WRONG WAY ARROW
 0.503 LT - STOP

646.85 REMOVAL OF EXISTING PAVEMENT MARKINGS
 0.506 TO 0.507 RT (US 5)

203.28 EXCAVATION OF SURFACES AND PAVEMENTS
 PLACE 4" OF TOPSOIL, SEED AND HAY MULCH

EXIT 6 - RAMP A & E NORTHBOUND OFF RAMP

SEE STANDARDS E-191, E-192 AND E-193
 FOR PAVEMENT MARKING GUIDELINES

616.41 REMOVAL OF EXISTING CURB
 0.410 TO 0.482 RT
 0.496 TO 0.505 RT (ISLAND)

621.80 REMOVAL AND DISPOSAL OF GUARDRAIL
 0.410 TO 0.461 LT

621.20 STEEL BEAM GUARDRAIL, GALVANIZED
 0.410 TO 0.461 LT

621.60 ANCHOR FOR STEEL BEAM RAIL
 0.461 LT

604.40 CHANGING ELEVATION OF DROP INLETS,
 CATCH BASINS, OR MANHOLES
 0.502 RT





676.10 DELINEATOR WITH STEEL POST
 0.461 LT

NOTE:
 REFER TO STANDARDS E-197, E-198
 AND E-199 FOR PLACEMENT
 GUIDELINES FOR TYPE I, TYPE II
 AND TYPE III DELINEATORS.

613.10 STONE FILL, TYPE I
 0.459 RT (RAMP A)

675.50 REMOVING SIGNS
 AS SHOWN - 45

675.60 ERECTING SALVAGED SIGNS
 AS SHOWN - 6

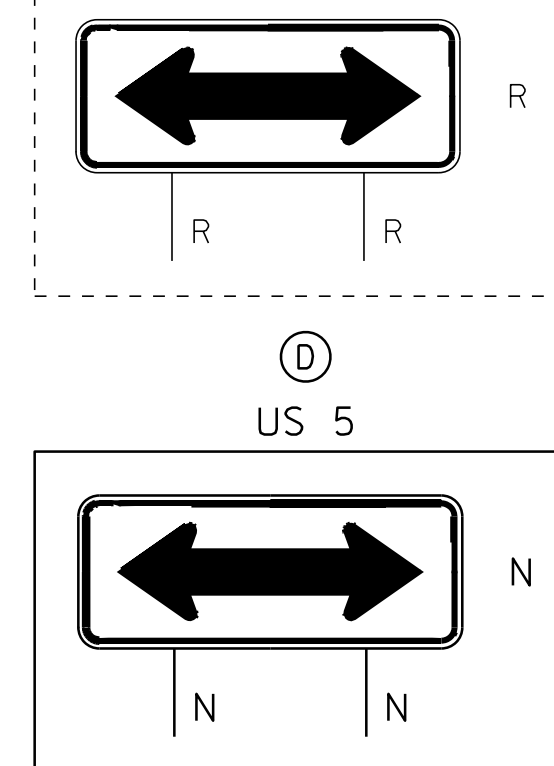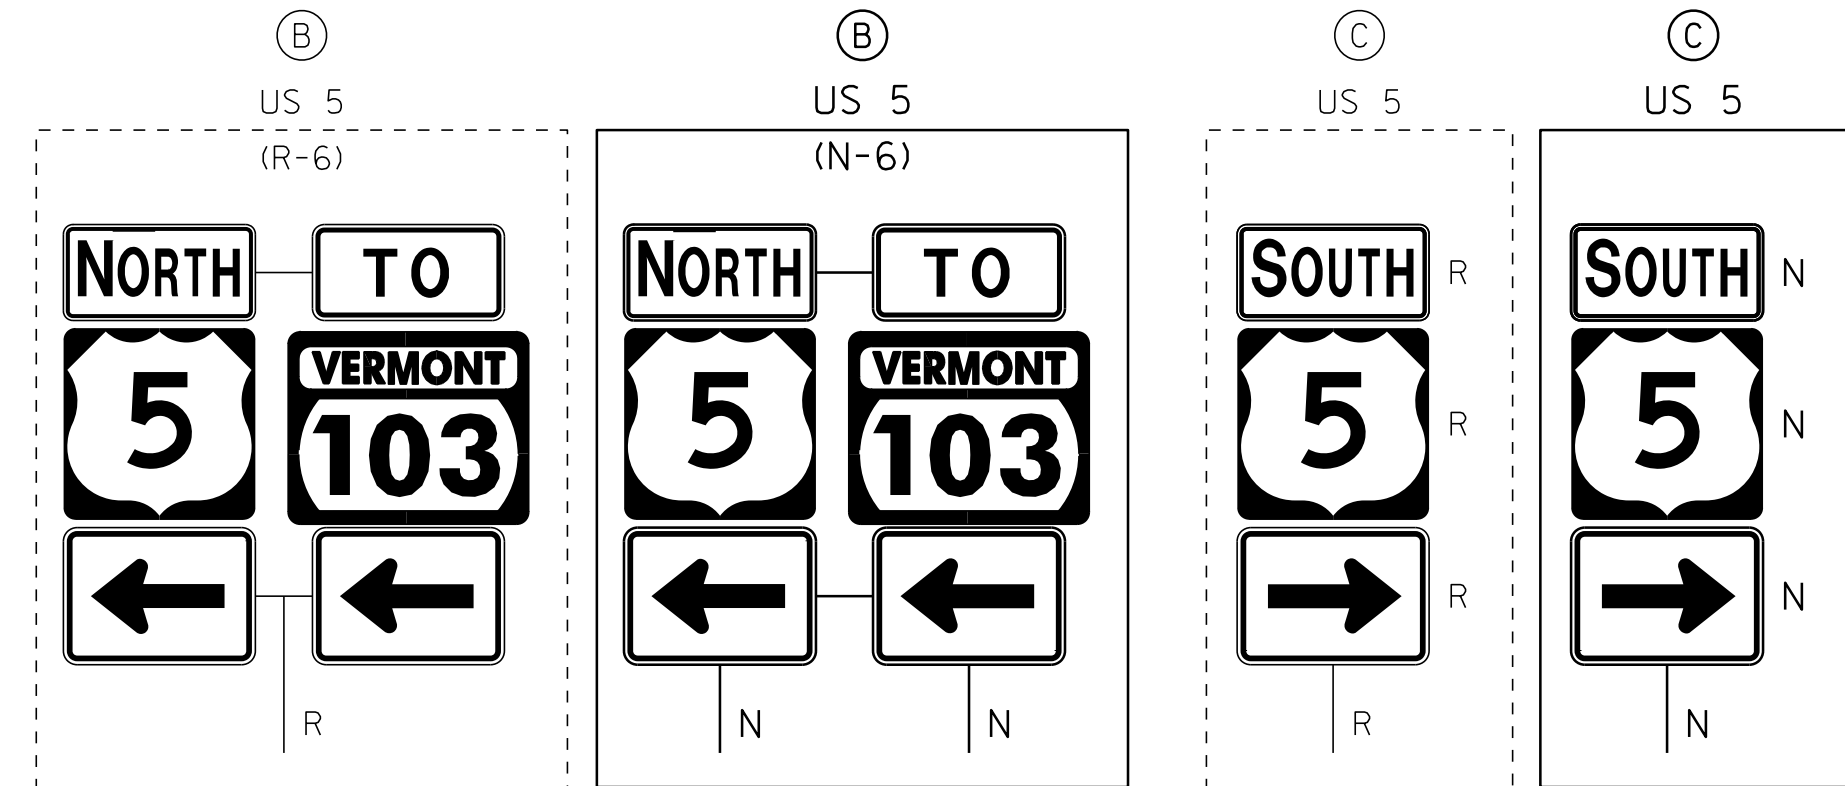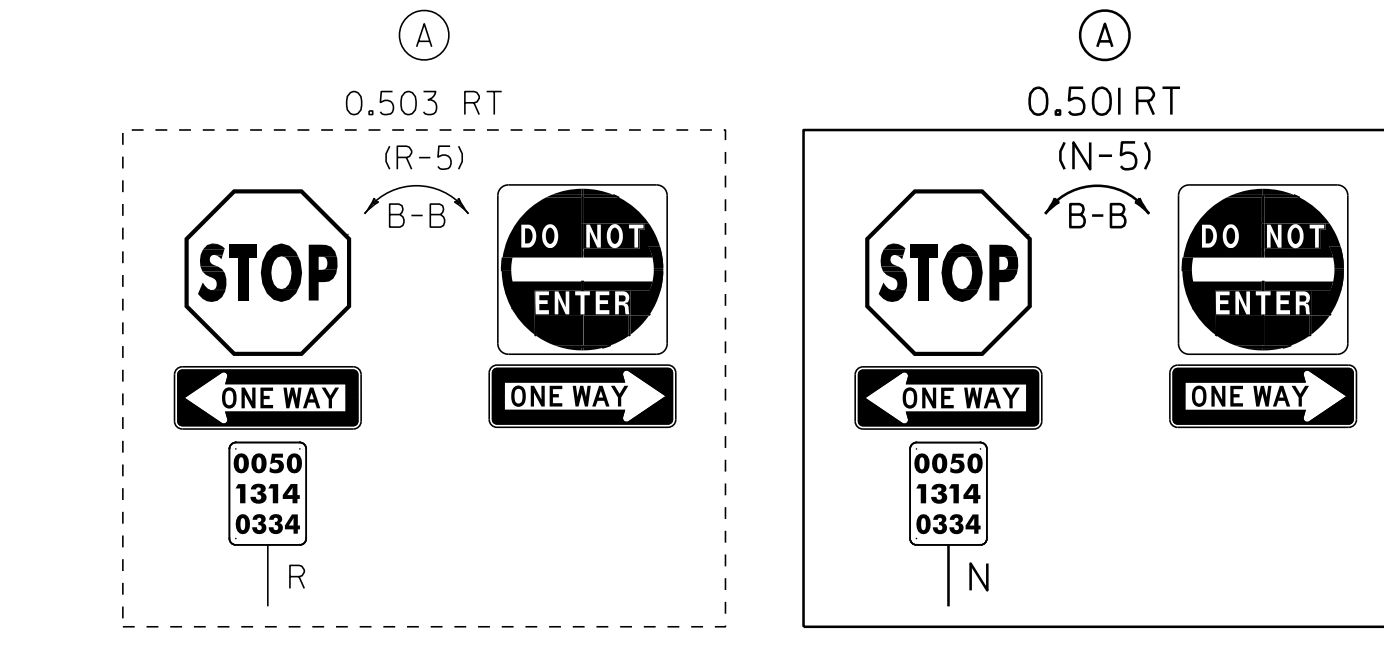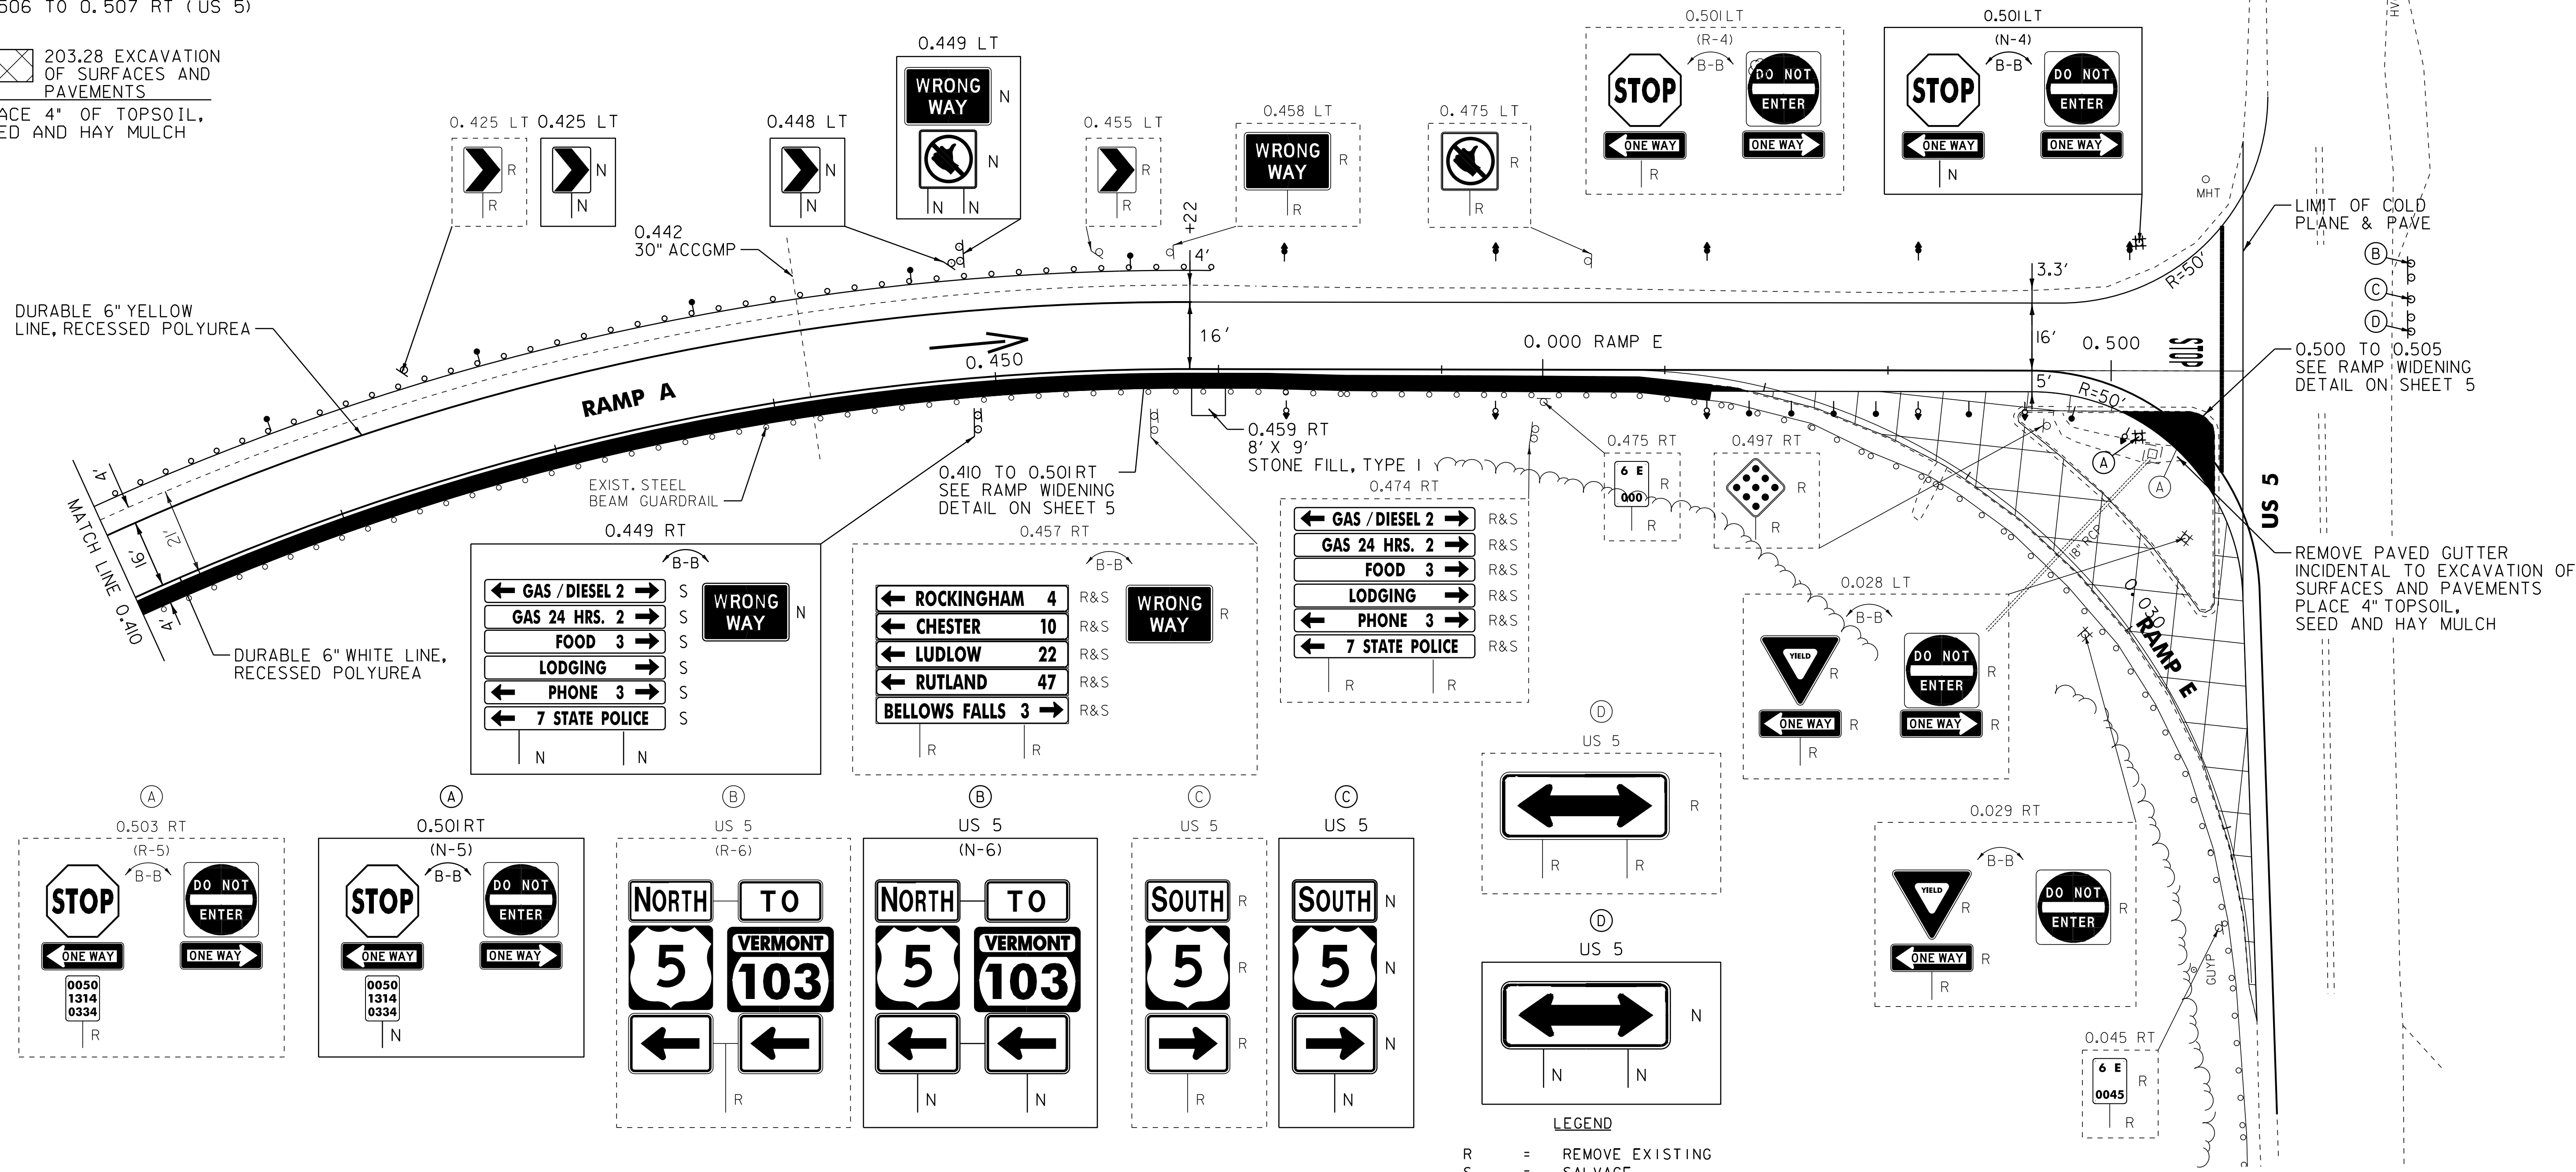

- LEGEND**
- R = REMOVE EXISTING
 - S = SALVAGE
 - R&S = REMOVE AND SALVAGE
 - N = NEW
 - RET = RETAIN
 - B-B = BACK TO BACK
 - = EXISTING GUARDRAIL
 - - - = PROPOSED GUARDRAIL
 - = TYPE I DELINEATOR, WHITE
 - = TYPE I DELINEATOR, AMBER
 - = TYPE II DELINEATOR, WHITE
 - = TYPE II DELINEATOR, RIGHT
 - = TYPE III DELINEATOR, LEFT

EXIT 6 NB OFF RAMP DETAIL SHEET 3

PROJECT NAME: WESTMINSTER-SPRINGFIELD	FILE NAME: /pave/01a014/pa014	PLOT DATE: 17-JAN-2013 12:43
PROJECT NUMBER: IM 091-1(62)	PROJECT LEADER: PTS	DRAWN BY: MRS
	DESIGNED BY: NLL	CHECKED BY: PTS
	IPARM FILE NAME: 01a014_22	SHEET 22 OF 43

NOT TO SCALE