

EXIT 7 - RAMP D NORTHBOUND ON RAMP

SEE STANDARDS E-191, E-192 AND E-193
FOR PAVEMENT MARKING GUIDELINES

646.622 TEMPORARY 6" WHITE LINE, PAINT
646.426 DURABLE 6" WHITE LINE, RECESSED POLYUREA
0.235 TO 0.327 SOLID RT
41.656 TO 41.704 DASHED RT
41.674 TO 41.704 SOLID RT

646.632 TEMPORARY 6" YELLOW LINE, PAINT
646.436 DURABLE 6" YELLOW LINE, RECESSED POLYUREA
0.235 TO 0.259 SOLID LT

646.662 TEMPORARY 12" WHITE LINE, PAINT
646.466 DURABLE 12" WHITE LINE, RECESSED POLYUREA
0.259 TO 0.309 SOLID LT
41.604 TO 41.656 SOLID RT

646.692 TEMPORARY LETTER OR SYMBOL, PAINT
646.492 DURABLE LETTER OR SYMBOL, THERMOPLASTIC
0.255 LT - YIELD MARKINGS (4)5

621.80 REMOVAL AND DISPOSAL OF GUARDRAIL
0.245 TO 0.250 LT
0.291 TO 0.303 RT

621.20 STEEL BEAM GUARDRAIL, GALVANIZED
0.245 TO 0.250 LT
0.248 TO 0.303 RT

621.50 MANUFACTURED TERMINAL SECTION (FLARED)
0.241 TO 0.248 RT

621.60 ANCHOR FOR STEEL BEAM RAIL
0.250 LT


203.40 SHOULDER BERM REMOVAL
0.235 TO 0.245 LT
0.303 TO 41.676 RT

616.41 REMOVAL OF EXISTING CURB
0.235 TO 0.258 RT

675.50 REMOVING SIGNS
AS SHOWN - 2

676.10 DELINEATOR WITH STEEL POST
0.241 RT
0.250 LT

NOTE:
REFER TO STANDARDS E-197, E-198
AND E-199 FOR PLACEMENT
GUIDELINES FOR TYPE I, TYPE II
AND TYPE III DELINEATORS.

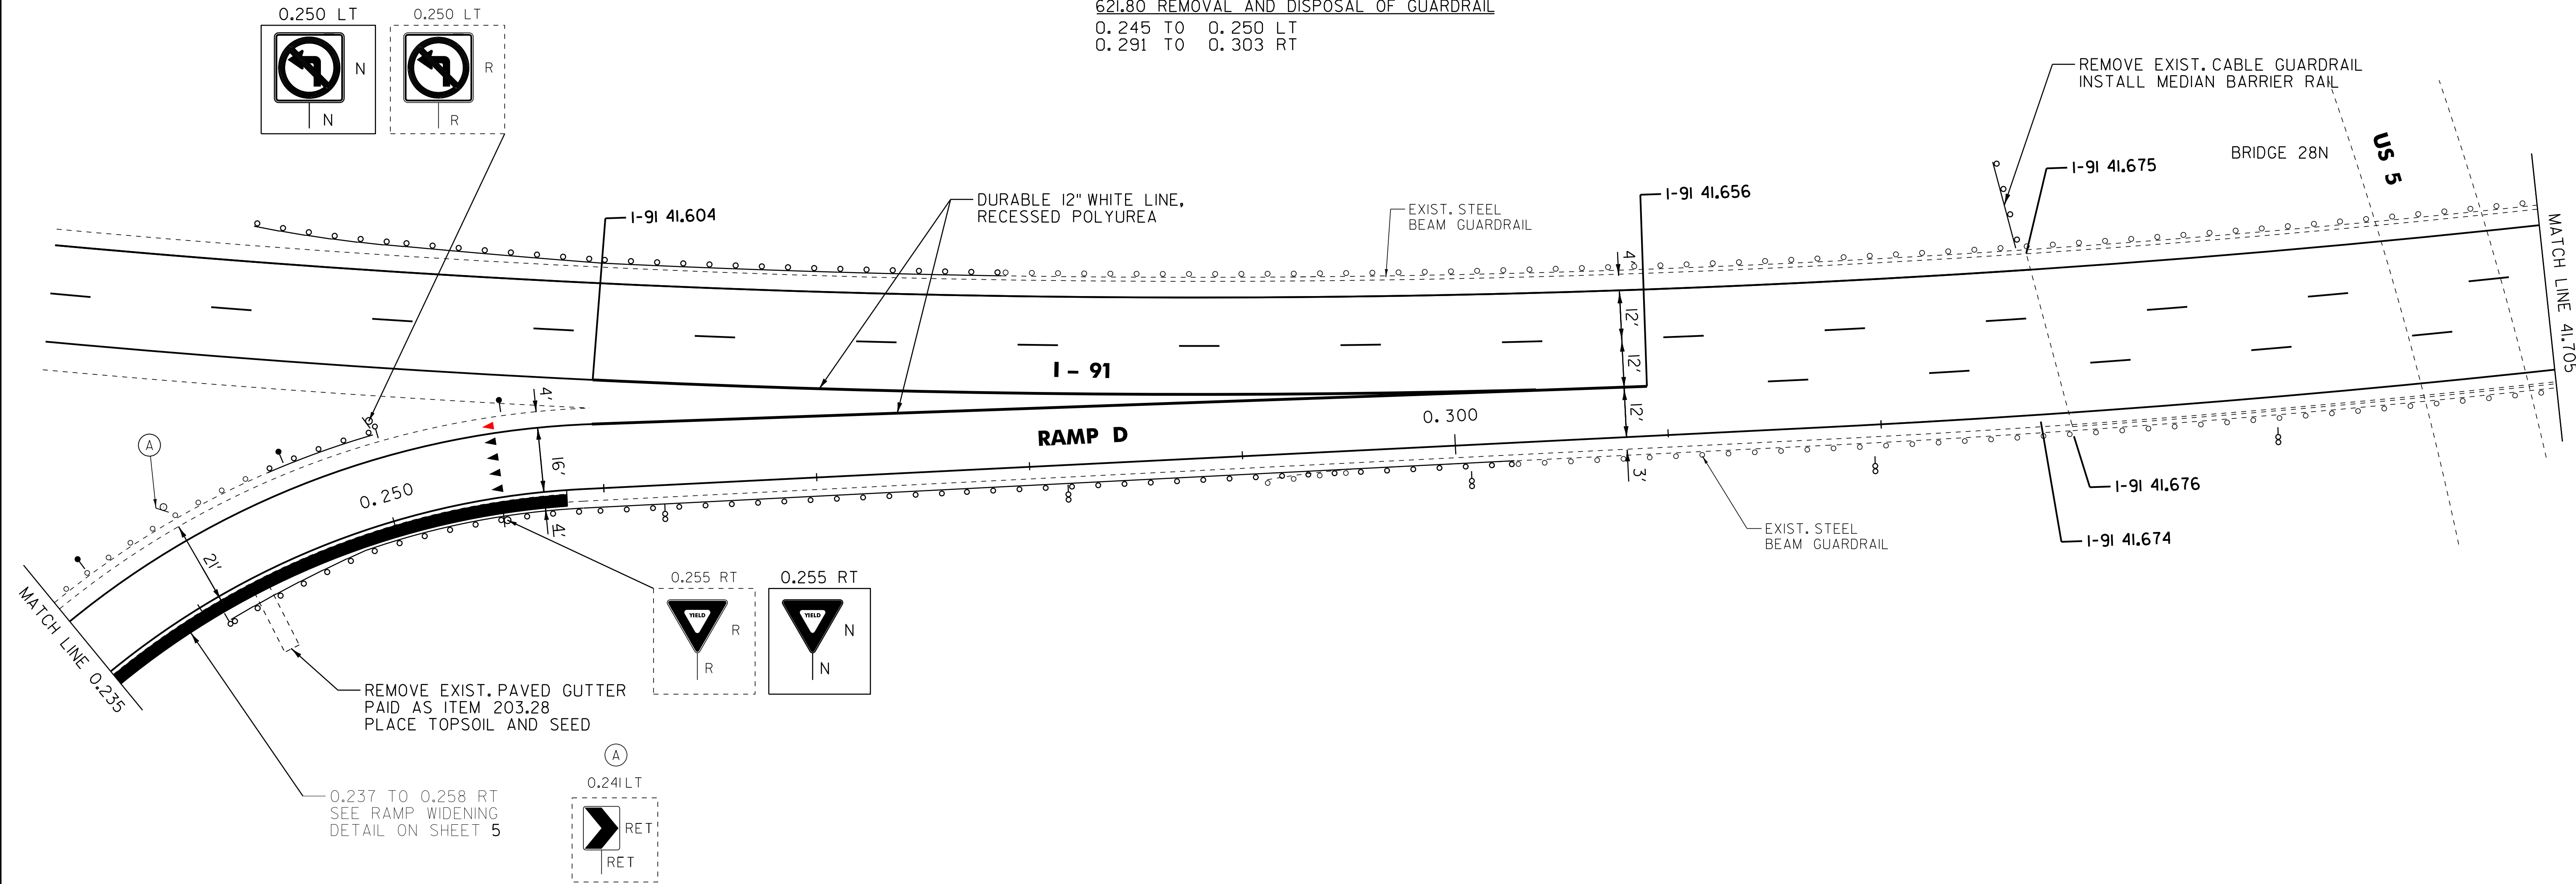

- LEGEND**
- R = REMOVE EXISTING
 - S = SALVAGE
 - R&S = REMOVE AND SALVAGE
 - N = NEW
 - RET = RETAIN
 - B-B = BACK TO BACK
 - = EXISTING GUARDRAIL
 - o---o = PROPOSED GUARDRAIL
 - o---o---o = TYPE I DELINEATOR, WHITE
 - o---o---o = TYPE I DELINEATOR, AMBER
 - o---o---o = TYPE II DELINEATOR, WHITE
 - o---o---o = TYPE III DELINEATOR, RIGHT
 - o---o---o = TYPE III DELINEATOR, LEFT

EXIT 7 NB ON RAMP DETAIL SHEET 3

PROJECT NAME: WESTMINSTER-SPRINGFIELD	PLOT DATE: 17-JAN-2013 12:44
PROJECT NUMBER: IM 091-1(62)	DRAWN BY: MRS
FILE NAME: /pave/01a014/pa014	CHECKED BY: PTS
PROJECT LEADER: PTS	SHEET 28 OF 43
DESIGNED BY: NULL	
IPARM FILE NAME: 01a014_28	

NOT TO SCALE