

**EXIT 7 - RAMP C  
NORTHBOUND OFF RAMP**

SEE STANDARDS E-191, E-192 AND E-193  
FOR PAVEMENT MARKING GUIDELINES

646.622 TEMPORARY 6" WHITE LINE, PAINT  
646.426 DURABLE 6" WHITE LINE, RECESSED POLYUREA  
0.000 TO 0.180 SOLID RT  
41.705 TO 41.759 DASHED RT  
41.705 TO 41.722 SOLID RT

646.632 TEMPORARY 6" YELLOW LINE, PAINT  
646.436 DURABLE 6" YELLOW LINE, RECESSED POLYUREA  
0.068 TO 0.180 SOLID LT

646.662 TEMPORARY 12" WHITE LINE, PAINT  
646.466 DURABLE 12" WHITE LINE, RECESSED POLYUREA  
0.045 TO 0.068 SOLID LT  
41.759 TO 41.790 SOLID RT  
41.776 TO 41.790 SOLID RT (GORE STRIPES)

646.692 TEMPORARY LETTER OR SYMBOL, PAINT  
646.492 DURABLE LETTER OR SYMBOL, THERMOPLASTIC  
0.119 RT - "STOP"  
0.127 RT - "AHEAD"

621.80 REMOVAL AND DISPOSAL OF GUARDRAIL  
0.096 TO 0.101 RT  
0.116 TO 0.120 LT

621.20 STEEL BEAM GUARDRAIL, GALVANIZED  
0.096 TO 0.101 RT  
0.116 TO 0.120 LT

621.60 ANCHOR FOR STEEL BEAM RAIL  
0.101 RT  
0.120 LT

616.41 REMOVAL OF EXISTING CURB  
0.068 TO 0.174 RT

203.40 SHOULDER BERM REMOVAL  
0.077 TO 0.116 LT


613.10 STONE FILL, TYPE I  
0.107 RT

675.50 REMOVING SIGNS  
AS SHOWN - 1

675.60 ERECTING SALVAGED SIGNS  
AS SHOWN - 12

676.10 DELINEATOR WITH STEEL POST  
0.101 RT  
0.120 LT

NOTE:  
REFER TO STANDARDS E-197, E-198  
AND E-199 FOR PLACEMENT  
GUIDELINES FOR TYPE I, TYPE II  
AND TYPE III DELINEATORS.

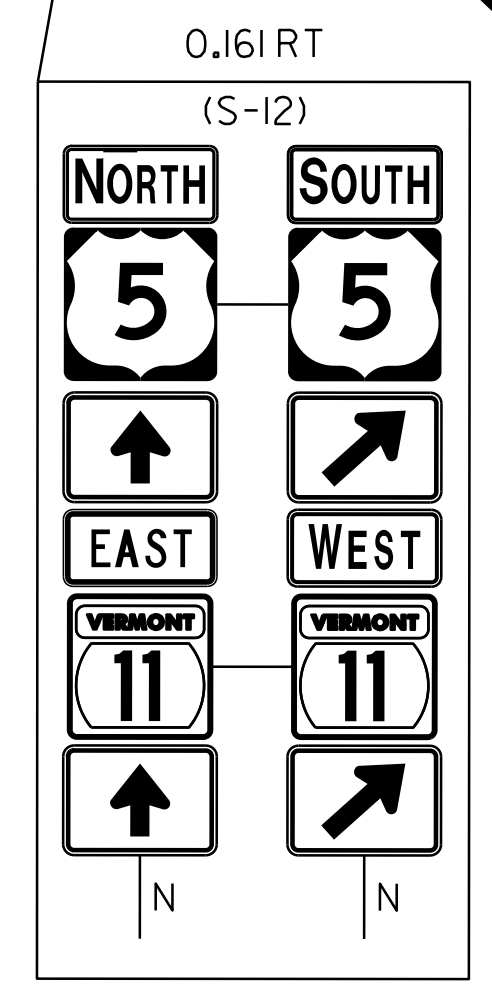

**LEGEND**

R	=	REMOVE EXISTING
S	=	SALVAGE
R&S	=	REMOVE AND SALVAGE
N	=	NEW
RET	=	RETAIN
B-B	=	BACK TO BACK
---	=	EXISTING GUARDRAIL
- - -	=	PROPOSED GUARDRAIL
○	=	TYPE I DELINEATOR, WHITE
○	=	TYPE I DELINEATOR, AMBER
○	=	TYPE II DELINEATOR, WHITE
○	=	TYPE III DELINEATOR, RIGHT
○	=	TYPE III DELINEATOR, LEFT

**EXIT 7 NB OFF RAMP DETAIL SHEET 1**

PROJECT NAME: WESTMINSTER-SPRINGFIELD  
PROJECT NUMBER: IM 091-1(62)

FILE NAME: /pave/01a014/pa014  
PROJECT LEADER: PTS  
DESIGNED BY: NLL  
IPARM FILE NAME: 01a014\_29

PLOT DATE: 17-JAN-2013 12:44  
DRAWN BY: MRS  
CHECKED BY: PTS  
SHEET 29 OF 43

NOT TO SCALE