

MATERIAL TOLERANCES	
MATERIAL ITEM	THICKNESS TOLERANCE
PAVEMENT (TOTAL DEPTH)	± 1/8"
SUBBASE	± 1/8"
SAND	± 1/8"

TYPICAL SECTIONS

1/2" BITUMINOUS CONCRETE PAVEMENT - TYPE III (PG 58-28)
 2" BITUMINOUS CONCRETE PAVEMENT - TYPE II (PG 58-28)
 2 1/2" BITUMINOUS CONCRETE PAVEMENT - TYPE I (PG 58-28)
 18" SUBBASE OF DENSE GRADED CRUSHED STONE
 15" OF SAND BORROW (SILVER ST. WHERE SHOWN)

SEEDING FORMULA URBAN AREAS







% WT.	LBS./A.	NAME	PUR %	GERM %
42.5	34.0	CREeping RED FESCUE	98	85
10.0	8.0	PERENNIAL RYE GRASS	95	90
42.5	34.0	KENTUCKY BLUE GRASS	85	85
5.0	4.0	ANNUAL RYE GRASS	95	85
100.00	80.0			

GENERAL NOTES

- SEED MIXTURE SHALL NOT HAVE A WEED CONTENT EXCEEDING 0.40% BY WEIGHT AND SHALL BE FREE OF ALL NOXIOUS SEED.
- SEEDS TO BE APPLIED PER SEEDING FORMULAS OR AS DIRECTED BY THE ENGINEER.
- FERTILIZER: FORMULA 10-20-10, TO BE USED WITH SEED, APPLIED AT THE RATE OF 500 LBS./ACRE. HYDRO SEEDERS MAY USE 19-19-19 FORMULA.
- AGRICULTURAL LIMESTONE: TO BE APPLIED AT THE RATE OF 2 TONS/ACRE, OR AS DIRECTED BY THE ENGINEER.
- HAY MULCH: TO BE PLACED ON EARTH SLOPES AT THE RATE OF 2 TONS/ACRE, OR AS DIRECTED BY THE ENGINEER.
- TOPSOIL: TO BE USED WITH SEED AS INDICATED ON THE PLANS, OR AS DIRECTED BY THE ENGINEER.

NOTES

- PROPOSED DRIVE APRONS SHALL INCLUDE 1/2" COLD PLANED PAVEMENT.
- TACK COAT: EMULSIFIED ASPHALT IS TO BE APPLIED AT THE RATE OF 0.025 GAL/SY BETWEEN SUCCESSIVE COURSES OF PAVEMENT AS DIRECTED BY THE ENGINEER.
- SLOPE ROUNDING: ALL CUT SLOPES TO BE ROUNDED IN ACCORDANCE WITH STANDARD SHEET B - 5.
- MARKER POSTS: TO BE PLACED AS INDICATED OR AS DIRECTED BY THE ENGINEER.

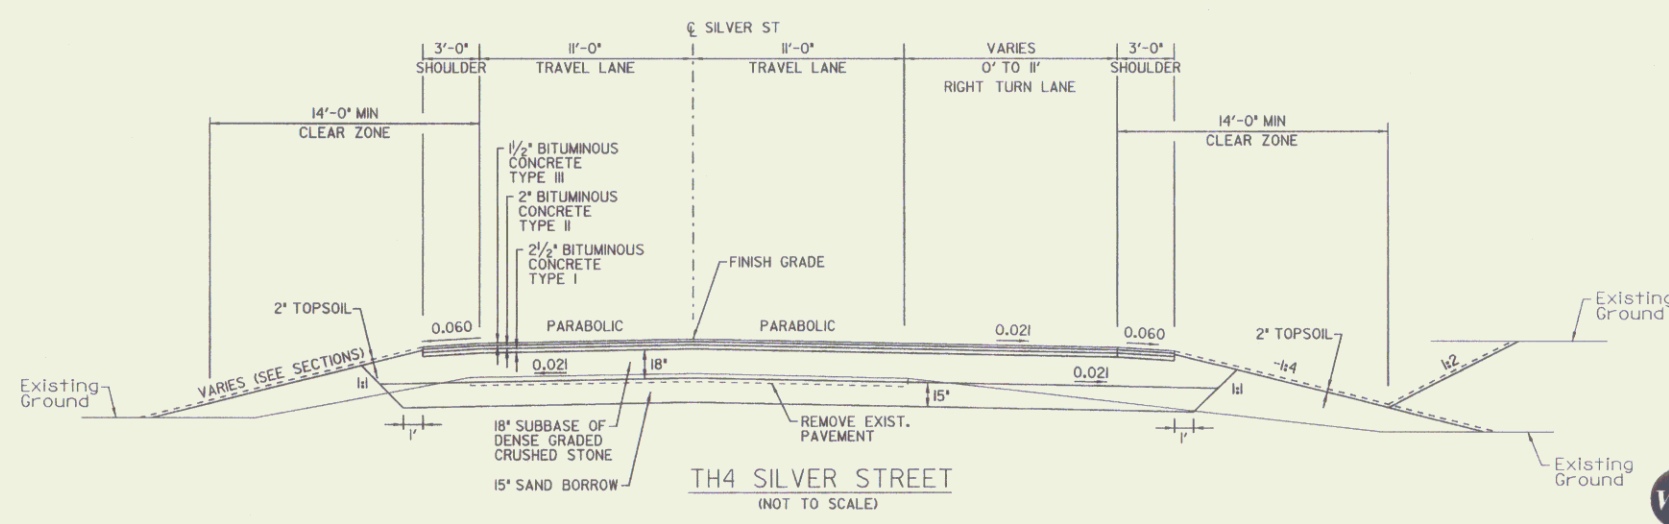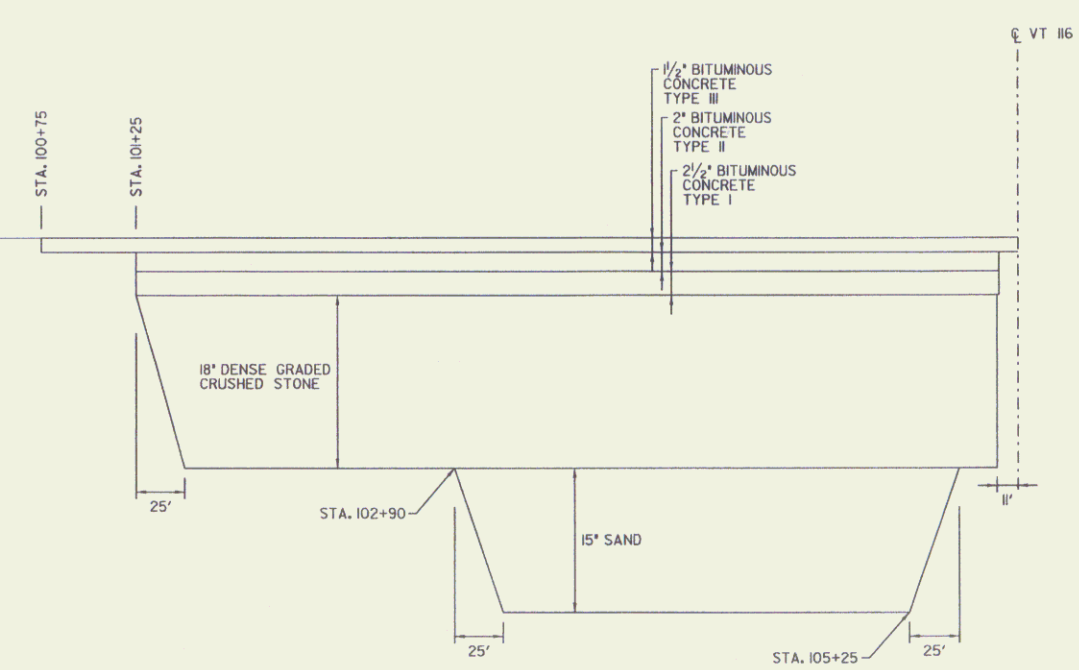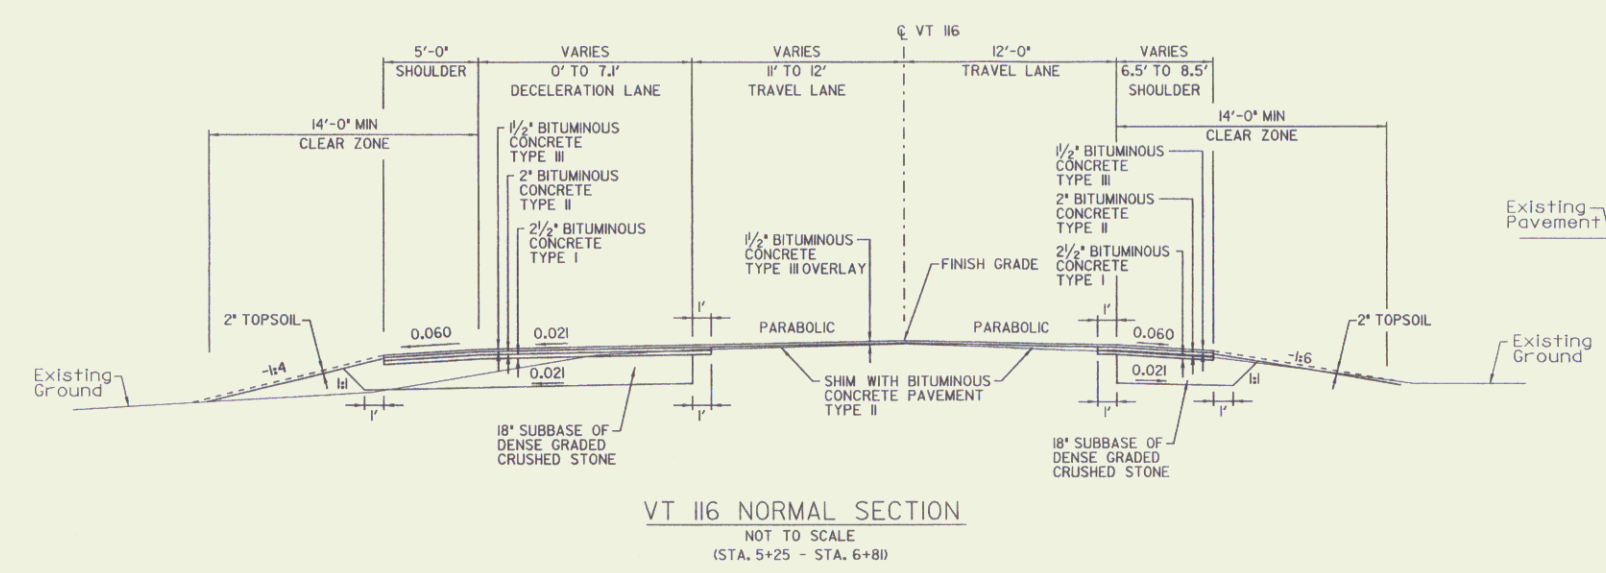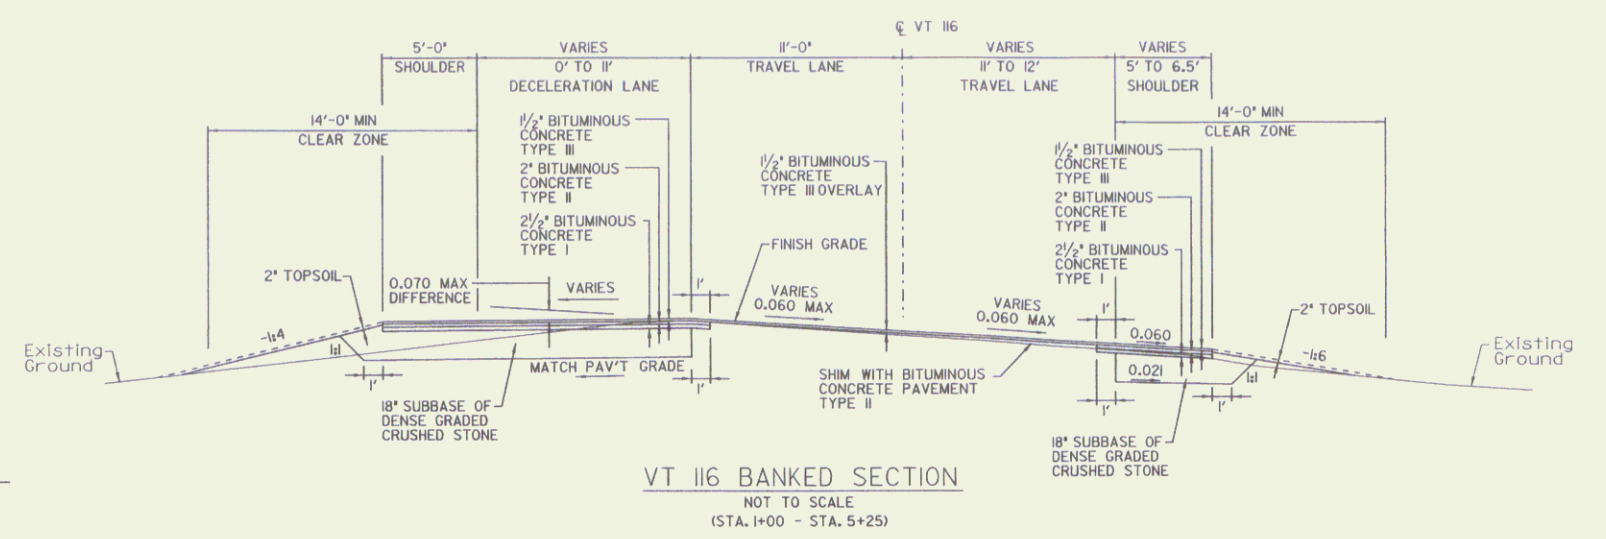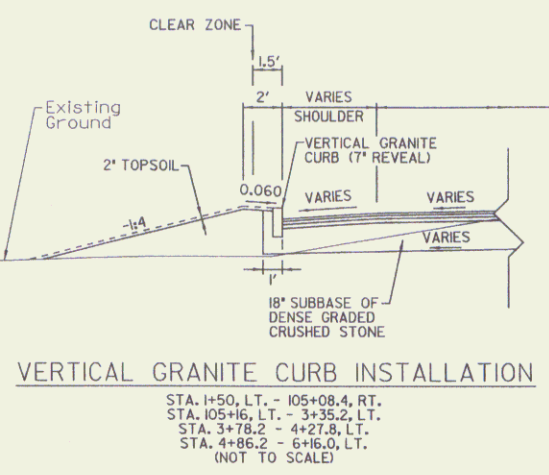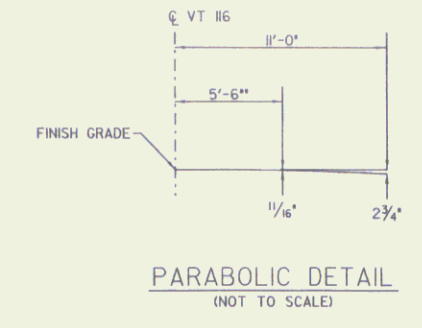

TYPICAL SECTIONS

PROJECT NAME:	HINESBURG	PLOT DATE:	***DATE***
PROJECT NUMBER:	HES 021-1(20)	DRAWN BY:	D. PECK
FILE NAME:	***FILENAME***	CHECKED BY:	G. BAKOS
PROJECT LEADER:	G. BAKOS	DESIGNED BY:	D. PECK
DESIGNED BY:	D. PECK	ROW SHEET	2 OF 9

