



MATERIAL ITEM	THICKNESS TOLERANCE
PAVEMENT COURSES (TOTAL DEPTH)	+ 1/4"
BASE COURSES (TOTAL DEPTH)	+/- 1"
SUBBASE	+/- 1"

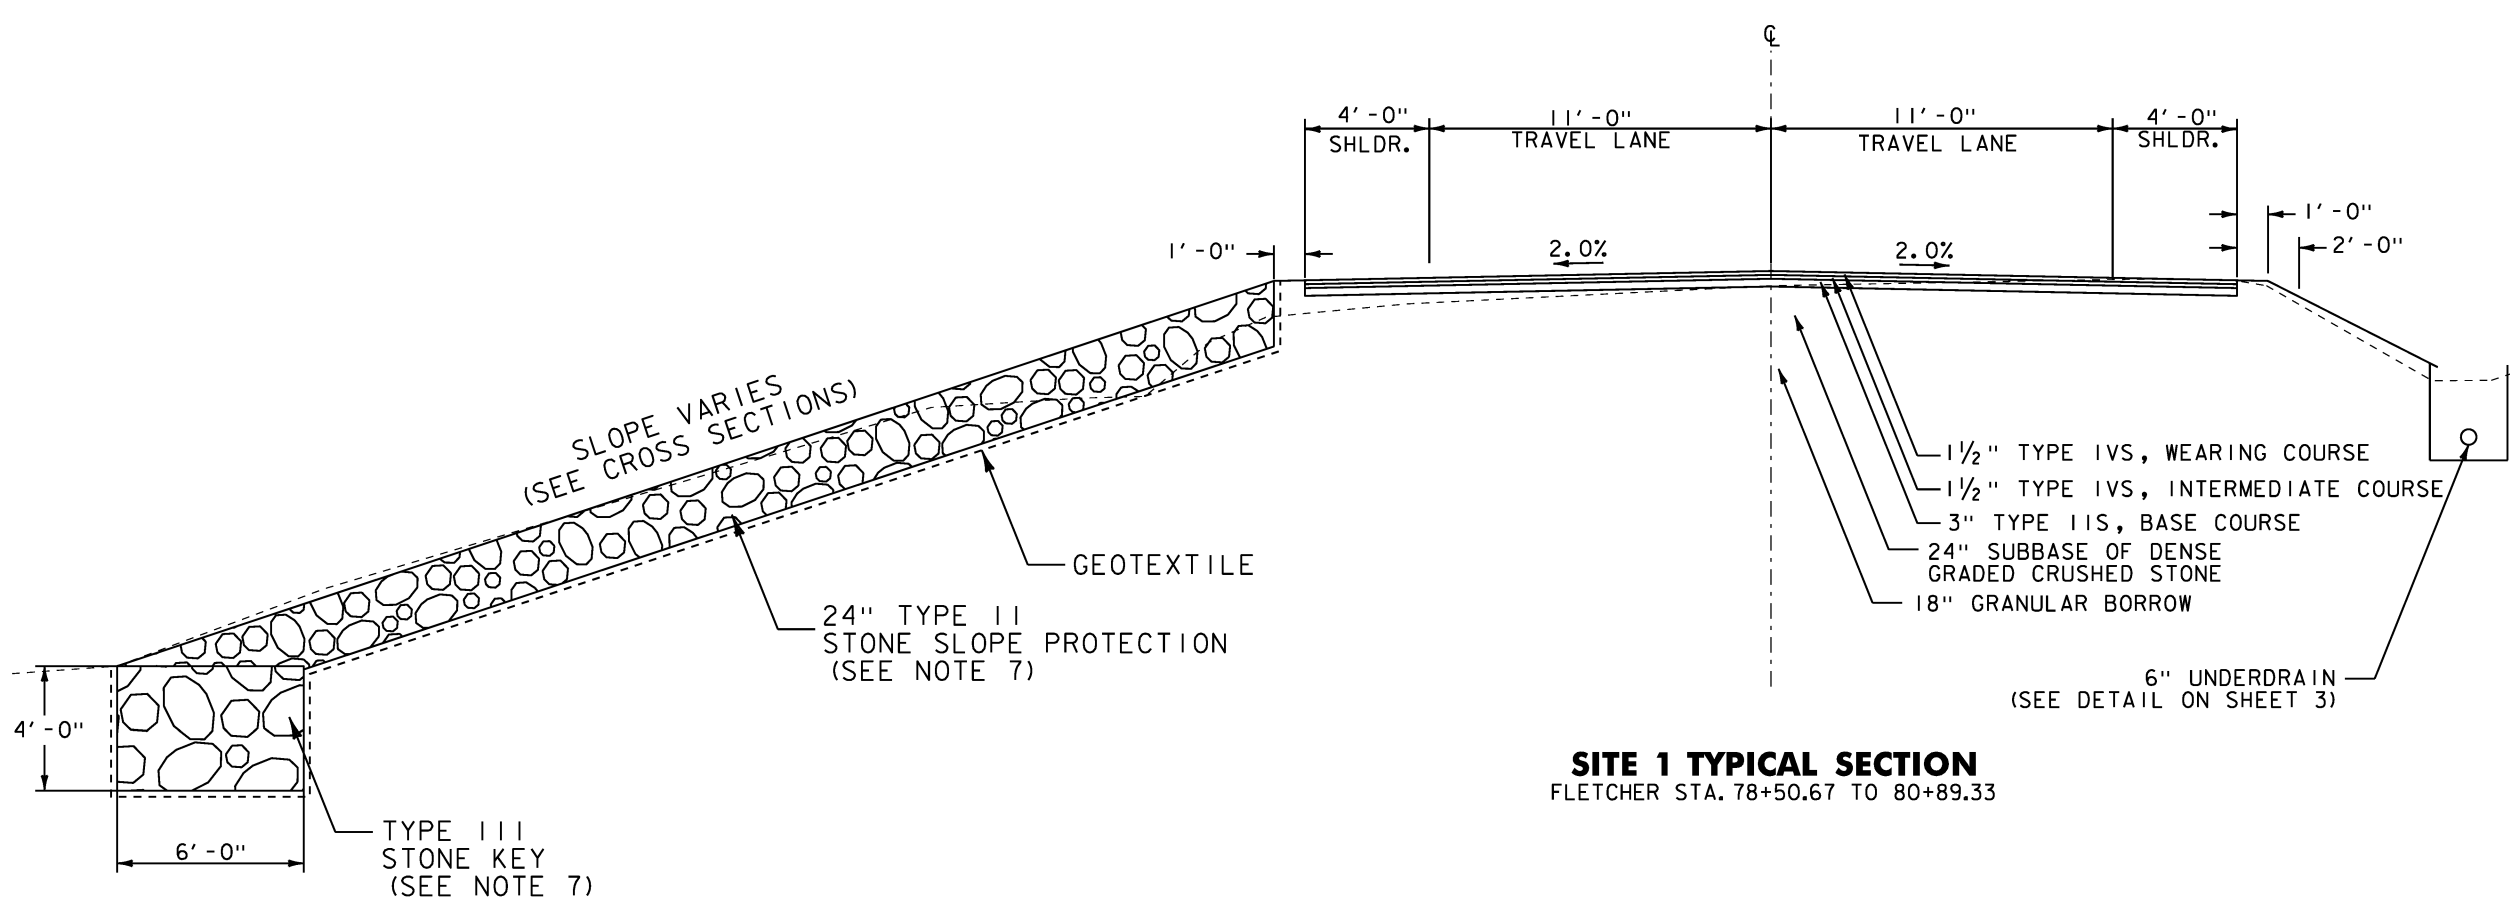


SITE 1 TYPICAL SECTION
FLETCHER STA. 78+50.67 TO 80+89.33

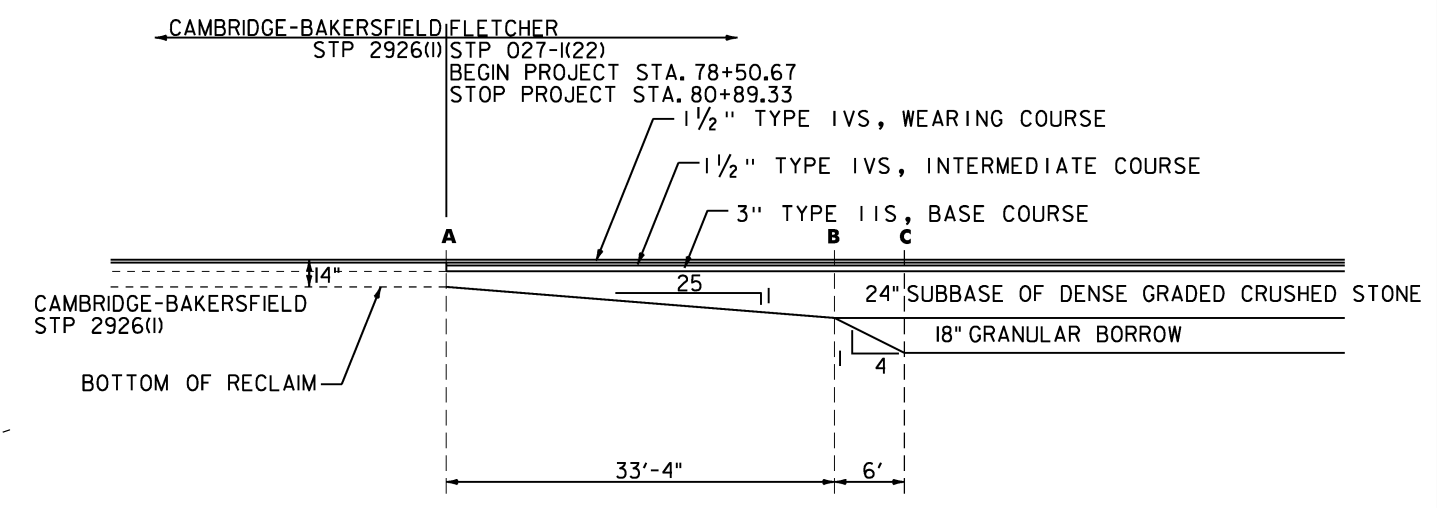


	A	B	C
VT ROUTE 108 SOUTH APPROACH	78+50.67	78+84.00	78+90.00
VT ROUTE 108 NORTH APPROACH	80+89.33	80+56.00	80+50.00

SITE 1 SUBBASE & PAVEMENT TRANSITION DETAIL

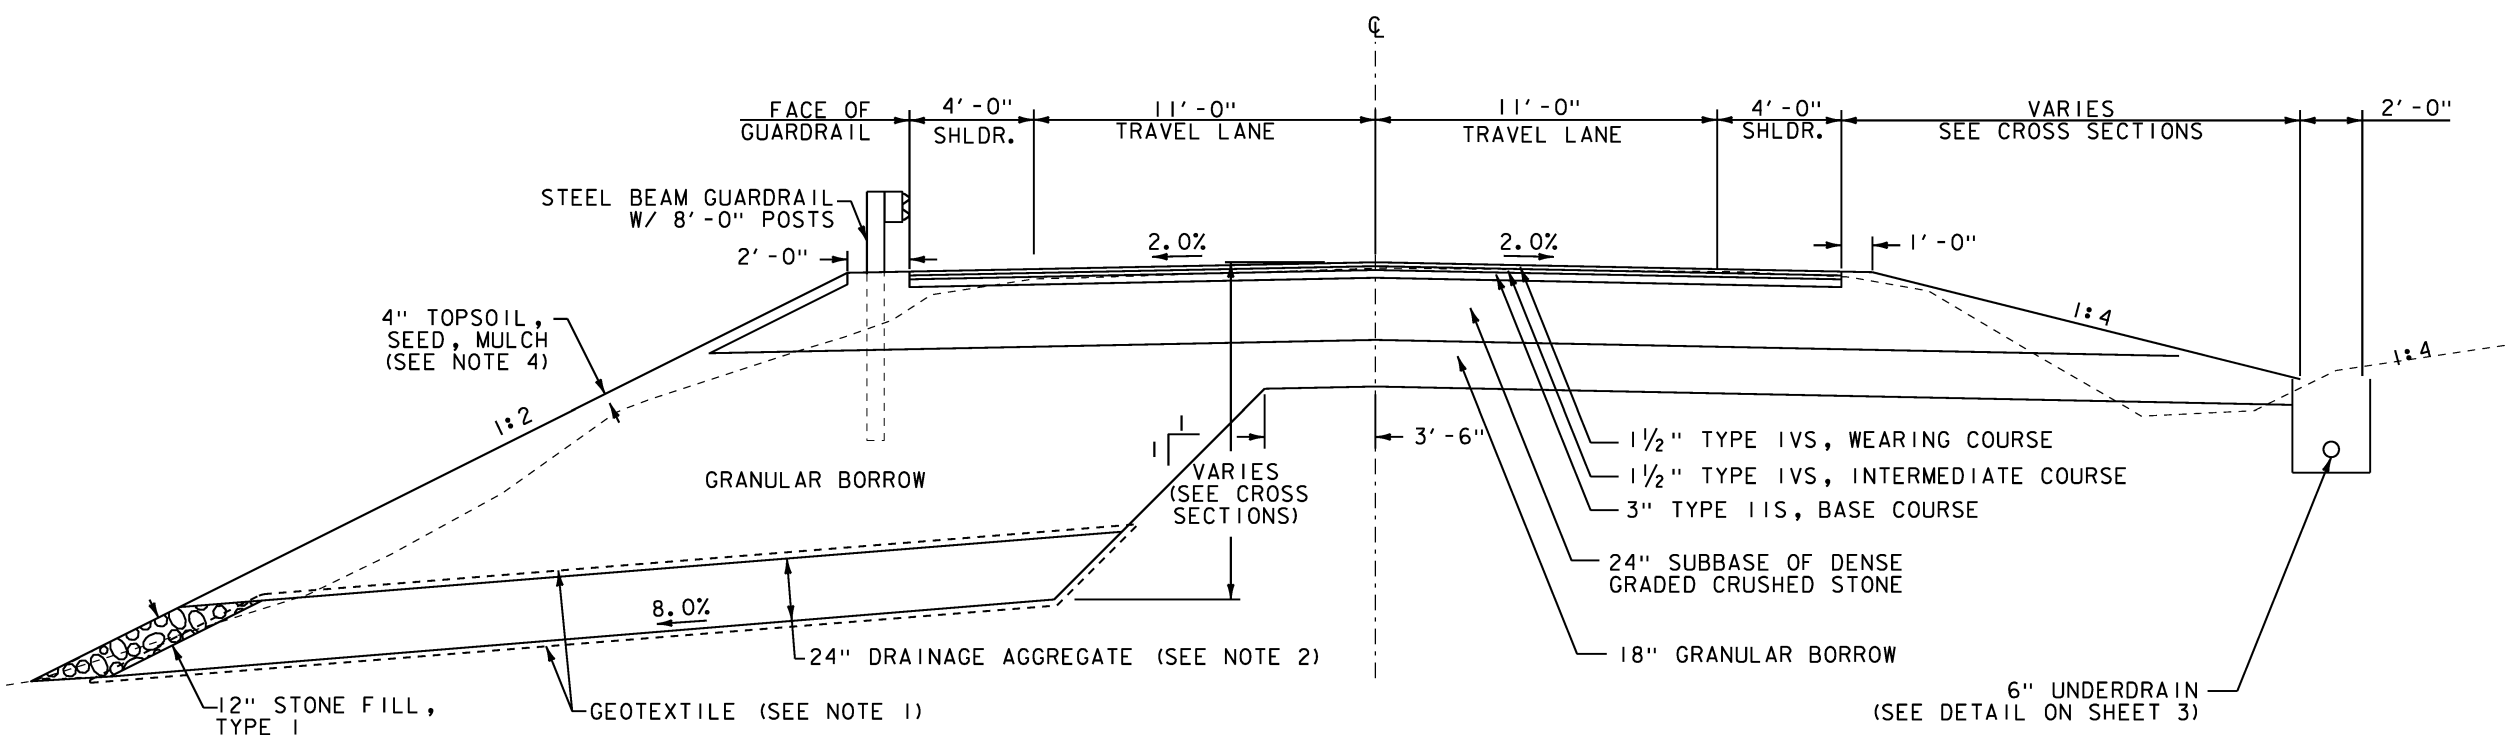

SITE 2 TYPICAL SECTION
FLETCHER STA. 118+86.00 TO 120+82.33

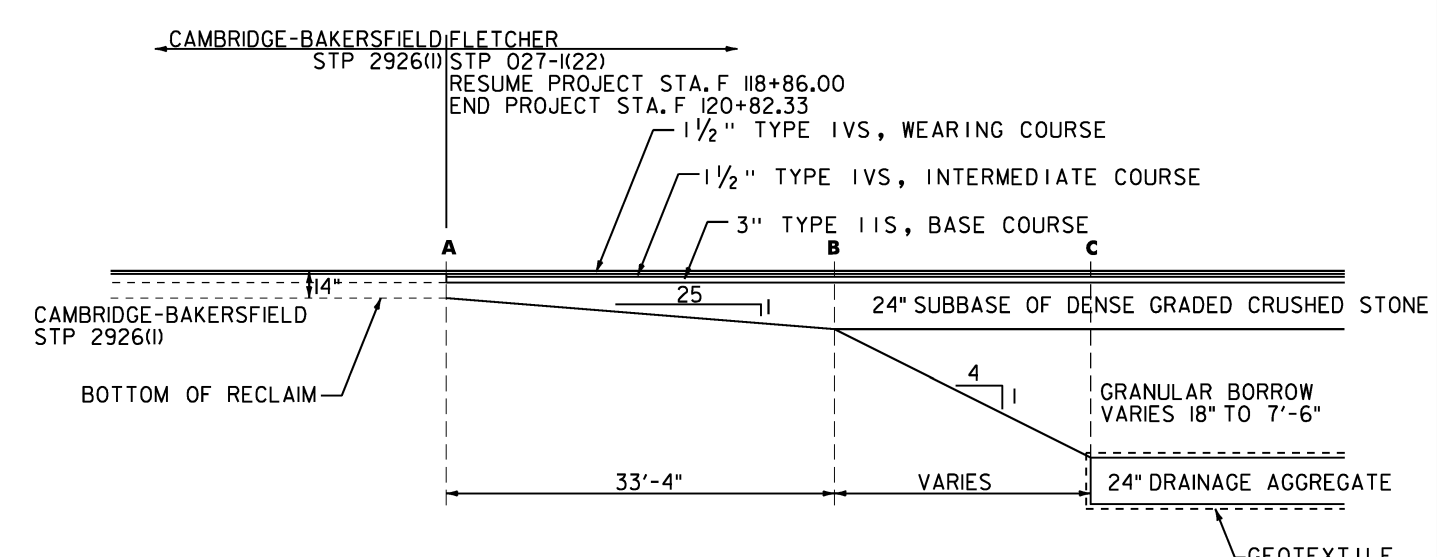

	A	B	C
VT ROUTE 108 SOUTH APPROACH	118+86.00	119+19.33	119+39.00
VT ROUTE 108 NORTH APPROACH	120+82.33	120+49.00	120+19.00

SITE 2 SUBBASE & PAVEMENT TRANSITION DETAIL

- NOTES:
1. GEOTEXTILE TO BE PAID AS ITEM 649.31 GEOTEXTILE UNDER STONE FILL. GEOTEXTILE SHALL FULLY WRAP AROUND DRAINAGE AGGREGATE. REFER TO VTRANS STANDARD SPECIFICATIONS FOR MINIMUM OVERLAP.
 2. DRAINAGE AGGREGATE TO BE PAID AS ITEM 900.608 - SPECIAL PROVISION (DRAINAGE AGGREGATE FOR TOE DRAIN).
 3. GRANULAR BORROW TO BE PAID AS ITEM 203.32 GRANULAR BORROW. MATERIAL SHALL MEET THE REQUIREMENTS OF SECTION 704.03.
 4. TOPSOIL, SEED AND MULCH TO BE APPLIED AS DIRECTED BY THE RESIDENT ENGINEER.
 5. EDGES OF NEW PAVEMENT SHALL INCLUDE A SAFETY EDGE AS SHOWN ON SHEET 3.
 6. EMULSIFIED ASPHALT TYPE CRS-1H OR RS-1H SHALL BE APPLIED AS A TACK COAT BETWEEN COURSE OF SUPERPAVE BITUMINOUS CONCRETE PAVEMENT AT A RATE OF 0.025 TO 0.04 GAL/SY. BOTH APPLICATIONS WILL BE PAID UNDER ITEM 900.683 SPECIAL PROVISION (EMULSIFIED ASPHALT) (RS-1H OR CRS-1H).
 7. EXCAVATION FOR STONE SLOPE PROTECTION AND STONE KEY SHALL BE PAID AS ITEM 203.15 COMMON EXCAVATION.

NOT TO SCALE

PROJECT NAME: FLETCHER	PLOT DATE: 01-AUG-2012
PROJECT NUMBER: STP 027-I(22)	DRAWN BY: STANTEC
FILE NAME: r11b064_typ.dgn	CHECKED BY: J. BLANCHARD
PROJECT LEADER: K. ROBBIE	SHEET 5 OF 6
DESIGNED BY: ISM	
PROJECT TYPICAL SHEET	