

# TYPICAL SECTIONS

MATERIAL ITEM	THICKNESS TOLERANCE
PAVEMENT	* 1/4"
BASE COURSE	* 1/2"
SUBBASE	* 1"
GRANULAR BORROW	* 1"
SAND BORROW	* 1"


3" BITUMINOUS CONCRETE PAVEMENT (1 1/4" Type III, over 1 3/4" Type II)  
 3" PLANT MIXED BASE COURSE  
 24" SUBBASE OF DENSE GRADED CRUSHED STONE  
 SHOULDERS : 1 1/4" BITUMINOUS CONCRETE PAVEMENT  
 0" TO 12" GRANULAR BORROW (IN FILLS) } AS INDICATED ON THE PLANS OR  
 0" TO 24" SAND BORROW (IN CUTS) } AS DIRECTED BY THE ENGINEER

## SEEDING FORMULA URBAN AREAS


% WT.	LBS./A.	NAME	PUR %	GERM %
37.5	30	CREeping RED FESCUE	98	85
31.25	25	KENTUCKY BLUE GRASS	85	75
31.25	25	PERENIAL RYE GRASS	95	90
100.00	80			

THE SEED MIXTURE SHALL NOT HAVE A WEED CONTENT EXCEEDING 0.40% BY WEIGHT AND SHALL BE FREE OF ALL NOXIOUS WEED SEED.  
 SEED- TO BE APPLIED PER SEEDING FORMULA OR AS DIRECTED BY THE ENGINEER.  
 FERTILIZER- FORMULA 10-20-10 TO BE USED WITH SEED, APPLIED AT THE RATE OF 500 LBS./ACRE OR AS DIRECTED BY THE ENGINEER.  
 AGRICULTURAL LIMESTONE- TO BE APPLIED AT THE RATE OF 2 TONS/ACRE OR AS DIRECTED BY THE ENGINEER.  
 HAY MULCH- TO BE PLACED ON EARTH SLOPES AT THE RATE OF 2 TONS/ACRE, OR AS DIRECTED BY THE ENGINEER.  
 TOPSOIL- TO BE USED WITH SEED AS INDICATED ON THE PLANS, OR AS DIRECTED BY THE ENGINEER.

SLOPE ROUNDING- ALL CUT SLOPES TO BE ROUNDED IN ACCORDANCE WITH STANDARD SHEET B-5.  
 PAY LIMITS OF SAND BORROW WHEN USED IN CONJUNCTION WITH UNDERDRAIN- SEE STANDARD SHEET D-2.

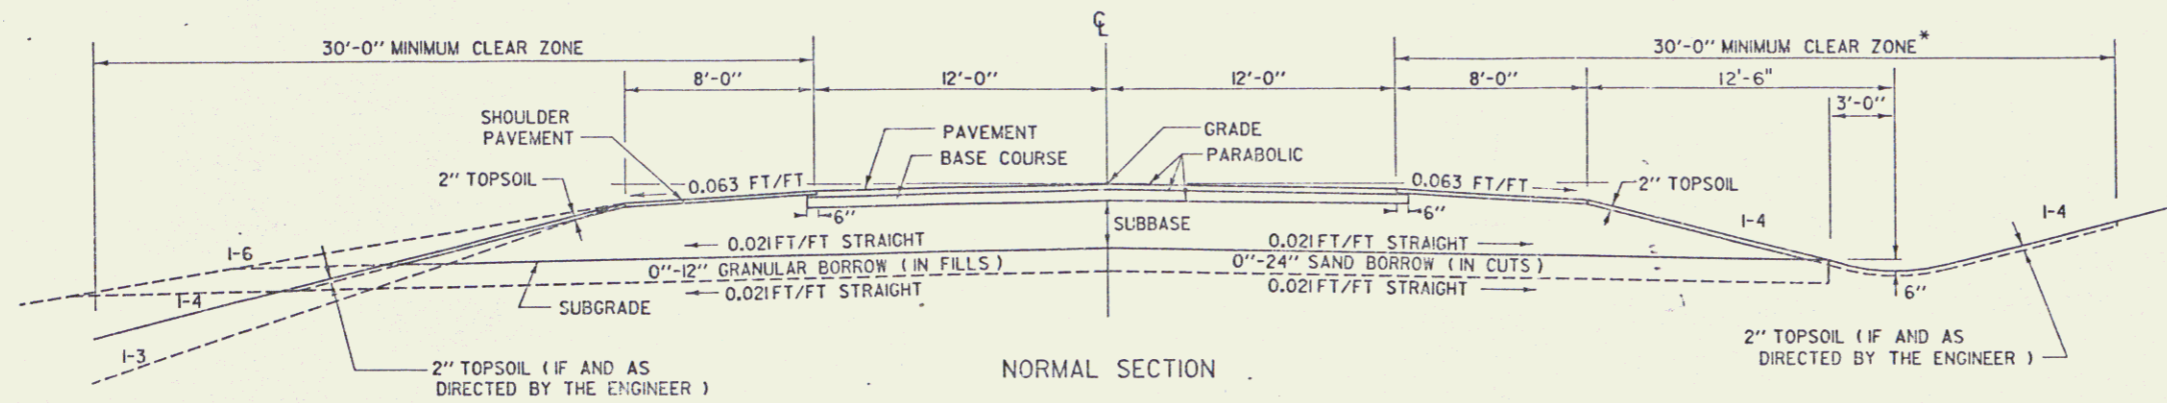


NORMAL SECTION

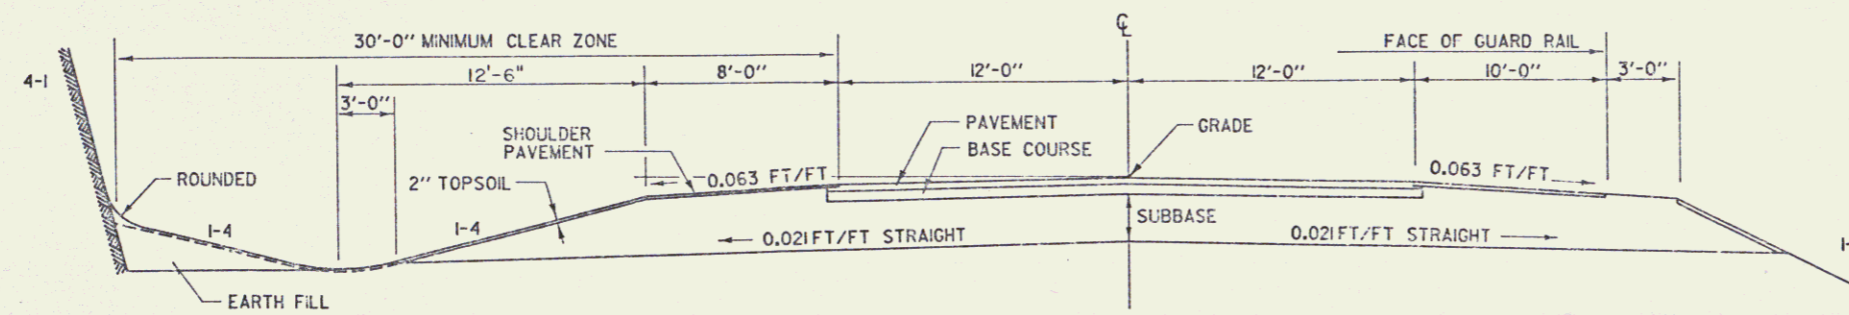


NORMAL SECTION IN ROCK CUT

NORMAL SECTION WITH GUARD RAIL

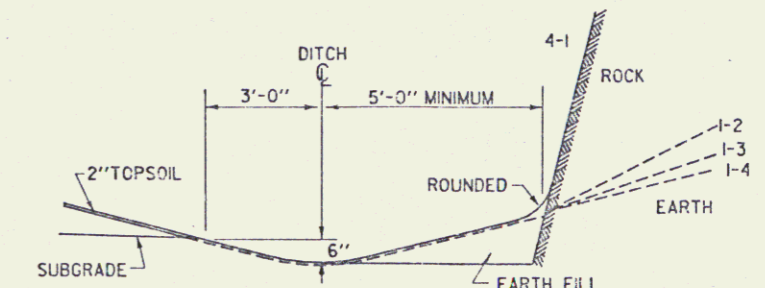


DETAILS OF DITCH AND BACKSLOPE FOR LOW SIDE OF BANK < 0.042 FT/FT

FOR SLOPES IN SOLID ROCK EXCAVATION AND DRILLING AND BLASTING OF SOLID ROCK SUBGRADE, SEE STANDARD SHEET A-60.

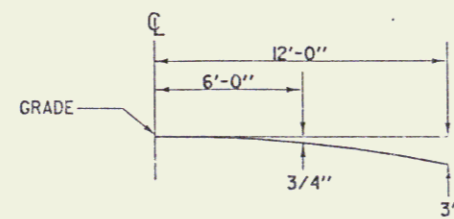

PARABOLIC DETAIL

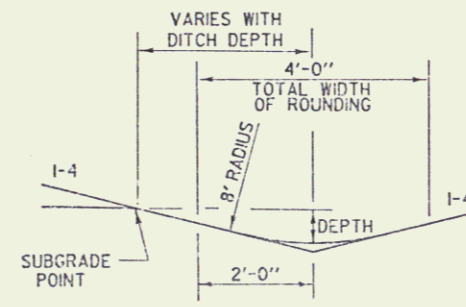

TYPICAL DITCH DETAILS

\*20'-0" MIN. STA. 270+00-272+00 RT.

JUN 02 1992



FERRISBURG  
 FEGC - FF 019-4 (10) S  
 SHEET 2 OF 7