
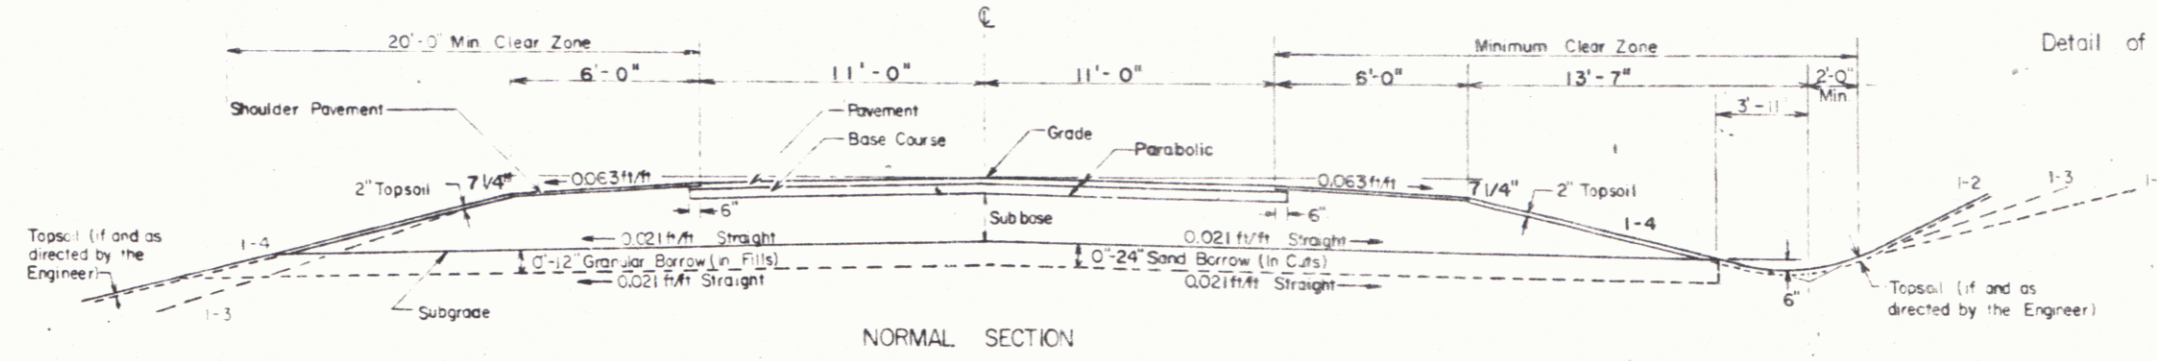
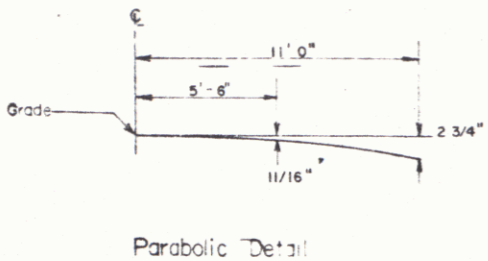
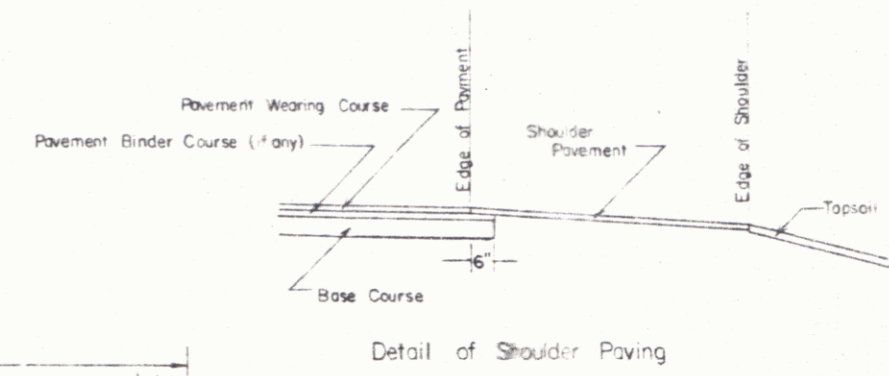


TYPICAL SECTIONS






1 1/2" Bituminous Concrete Pavement Type II
 4" Plant Mixed Base Course Placed in Two - 2" Courses
 24" Subbase of Gravel

Shoulders: 1 1/2" Bituminous Concrete Pavement Type II
 0"-12" Granular Borrow (In Fills)
 0"-24" Sand Borrow (In Cuts)

as indicated on the plans or as directed by the Engineer

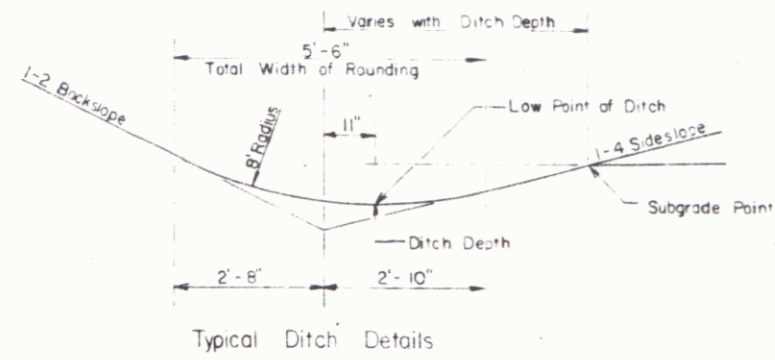

Material Item	Thickness	Tolerance
Pavement	1 1/2"	± 1/4"
Base Course	4"	± 1/2"
Subbase	24"	± 1"
Granular Borrow	0"-12"	± 1"
Sand Borrow	0"-24"	± 1"

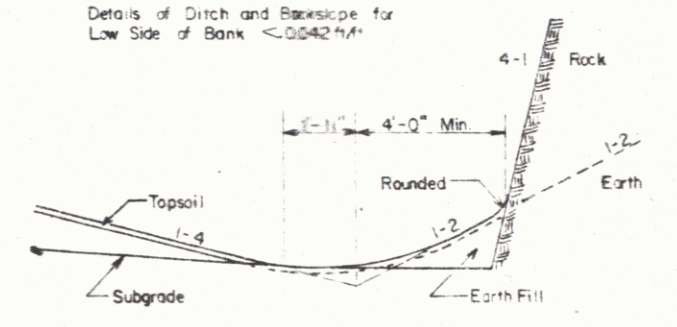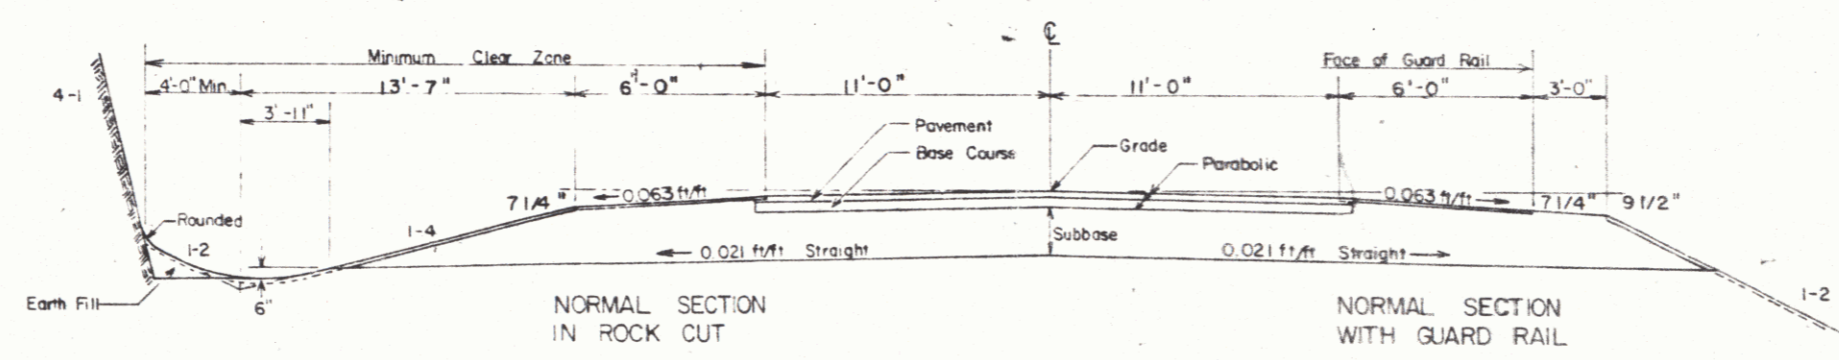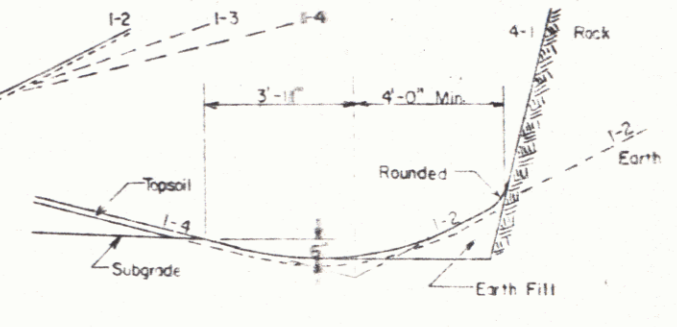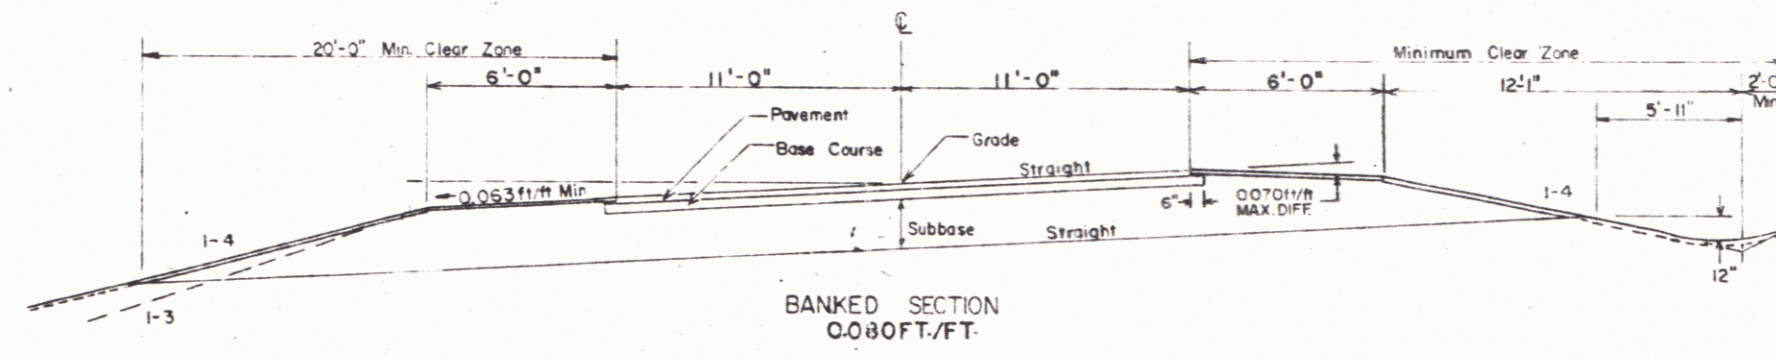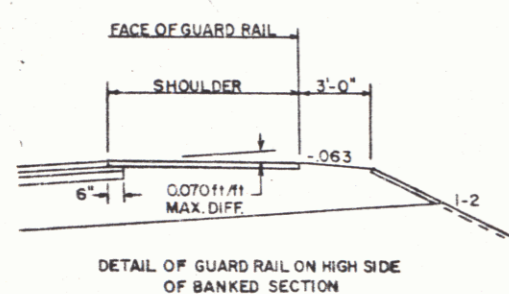

For slopes in Solid Rock Excavation and Drilling and Blasting of Solid Rock Subgrade, see Standard Sheet A-62.

Rate	lbs./A.	Name	Par. 1	Par. 2
3.33	2	Crow Vetch	97	75
50.00	30	Cresting Red Fescue	98	85
8.33	5	Timothy	99	85
16.67	10	Perennial Ryegrass (Var. Pennine)	95	85
1.34	3	Alfalfa (Var. Saracene)	55	85
8.33	5	Birdfoot Trefoil (Var. Espire)	56	85
5.00	5	Highland Seed Grass	62	85
20.00	20			

- General Notes
- SEED - To be applied per Seeding Formula as directed by the Engineer.
 - FERTILIZER - Formula 10-20-10 to be used with Seed, applied at the rate of 500 lbs./Acre.
 - AGRICULTURAL LIMESTONE - To be used with Seed, applied at the rate of 2 Tons/Acre or as directed by the Engineer.
 - HAY MULCH - To be placed on earth slopes at the rate of 2 Tons/Acre.
 - TOPSOIL - To be used with Seed as indicated on the plans or as directed by the Engineer.
 - MARKER POSTS (Wood or Steel, as specified) - To be placed as directed by the Engineer.
 - SLOPE ROUNDING - All cut slopes to be rounded in accordance with Standard Sheet B-5.
 - PAY LIMITS OF SAND BORROW WHEN USED IN CONJUNCTION WITH UNDERDRAIN - See Standard Sheet D-2.

SEE SHEET 3 FOR THE 33 TYPICAL SECTION.

HALIFAX
F 013-1(2) S