


TYPICAL SECTIONS

2-1/2" BITUMINOUS CONCRETE PAVEMENT, ITEM 406.25 ($\pm 1/4"$)
 3" PLANT MIXED BASE COURSE, ITEM 303.25 ($\pm 1/2"$)
 24" SUB-BASE OF GRAVEL, ITEM 301.15 ($\pm 1"$)
 SHOULDERS: 1-1/4" BITUMINOUS CONCRETE PAVEMENT, ITEM 406.25 ($\pm 1/4"$)
 0"-24" SAND BORROW, ITEM 203.31 ($\pm 1"$)
 0"-12" GRANULAR BORROW, ITEM 203.32 ($\pm 1"$)

TO BE PLACED AS INDICATED ON THE PLANS OR AS DIRECTED BY THE ENGINEER
 TOLERANCE IN PARENTHESES APPLIES TO THICKNESSES

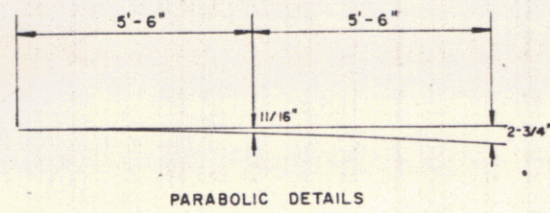

GENERAL NOTES

TO BE APPLIED AS DIRECTED BY THE ENGINEER

SEEDING FORMULA, ITEM 651.10 URBAN AREAS

% WT	LBS/A	NAME	PUR%	GERM%
37.50	30	CREERING RED FESCUE	98	85
31.25	25	KENTUCKY BLUEGRASS	85	75
31.25	25	PERENIAL RYE GRASS	95	90
100.00	80			

THE SEED MIXTURE SHALL NOT HAVE A WEED CONTENT EXCEEDING 0.40% BY WEIGHT AND SHALL BE FREE OF ALL NOXIOUS WEED SEED.

MARKER POSTS, (WOOD OR STEEL AS SPECIFIED) TO BE PLACED AS DIRECTED BY THE ENGINEER

FERTILIZER, ITEM 651.15 FORMULA 10-20-10 TO BE USED WITH SEED, ITEM 651.10 APPLIED AT THE RATE OF 500 LBS/ACRE




AGRICULTURAL LIMESTONE, ITEM 651.20 TO BE APPLIED AT RATE OF 2 TONS/ACRE OR AS DIRECTED BY THE ENGINEER

HAY MULCH, ITEM 651.25 TO BE PLACED ON EARTH SLOPES AT THE RATE OF 2 TONS/ACRE

TOPSOIL, ITEM 653.10 TO BE USED WITH SEED, ITEM 651.10 IN RESIDENTIAL AREAS, AS DIRECTED BY THE ENGINEER

SEE STANDARD SHEET B-5 FOR TYPICAL SLOPE ROUNDING

SEE STANDARD SHEET D-2 FOR SAND BORROW IN CONJUNCTION WITH UNDERDRAIN.

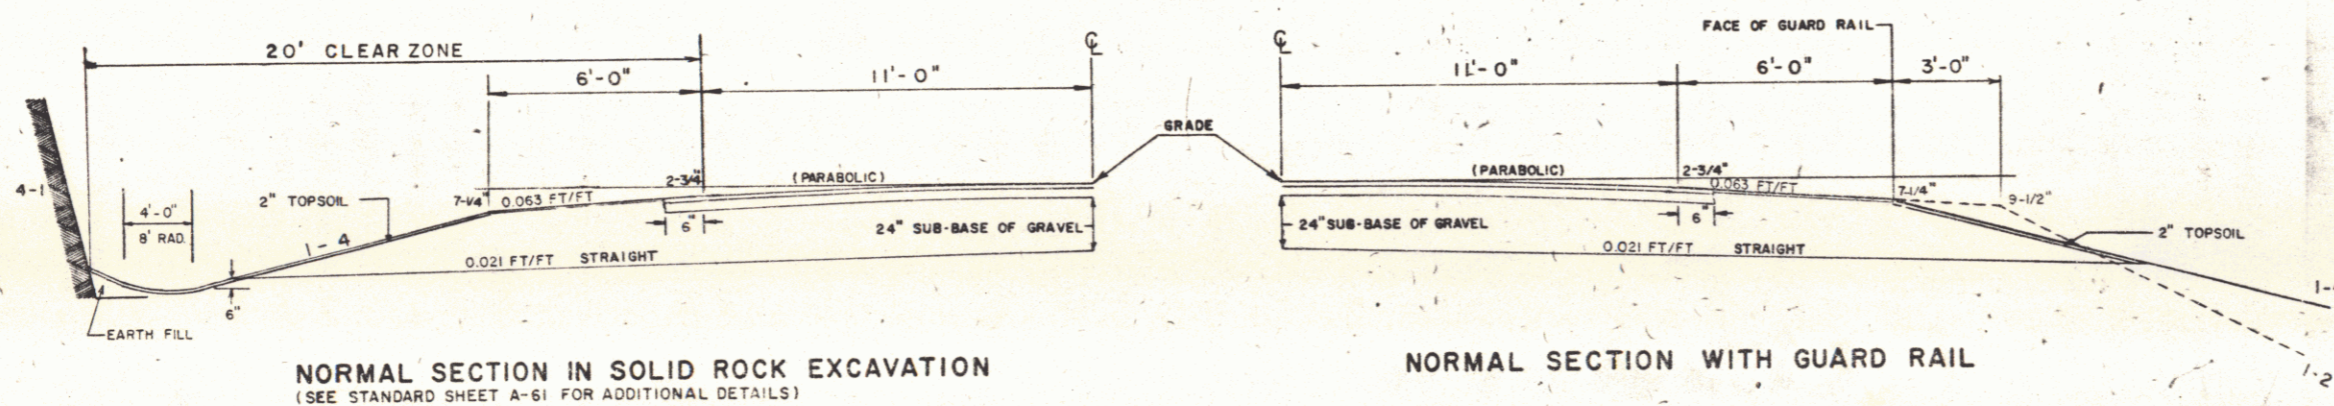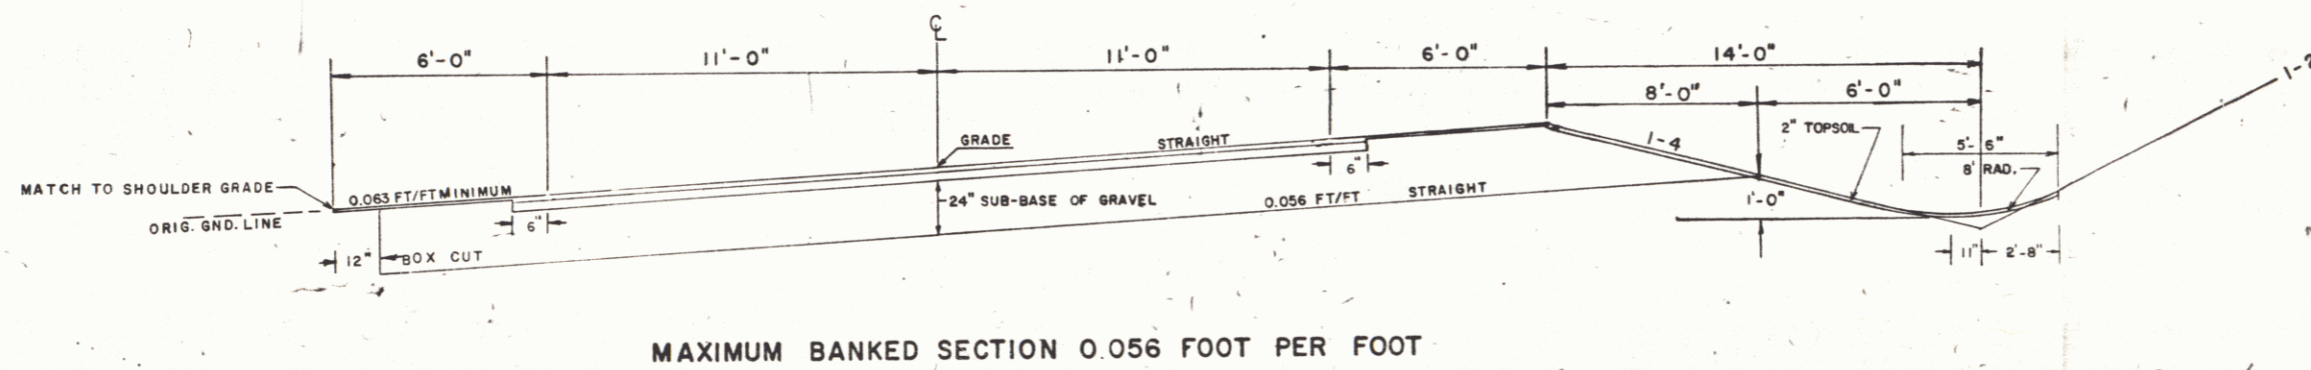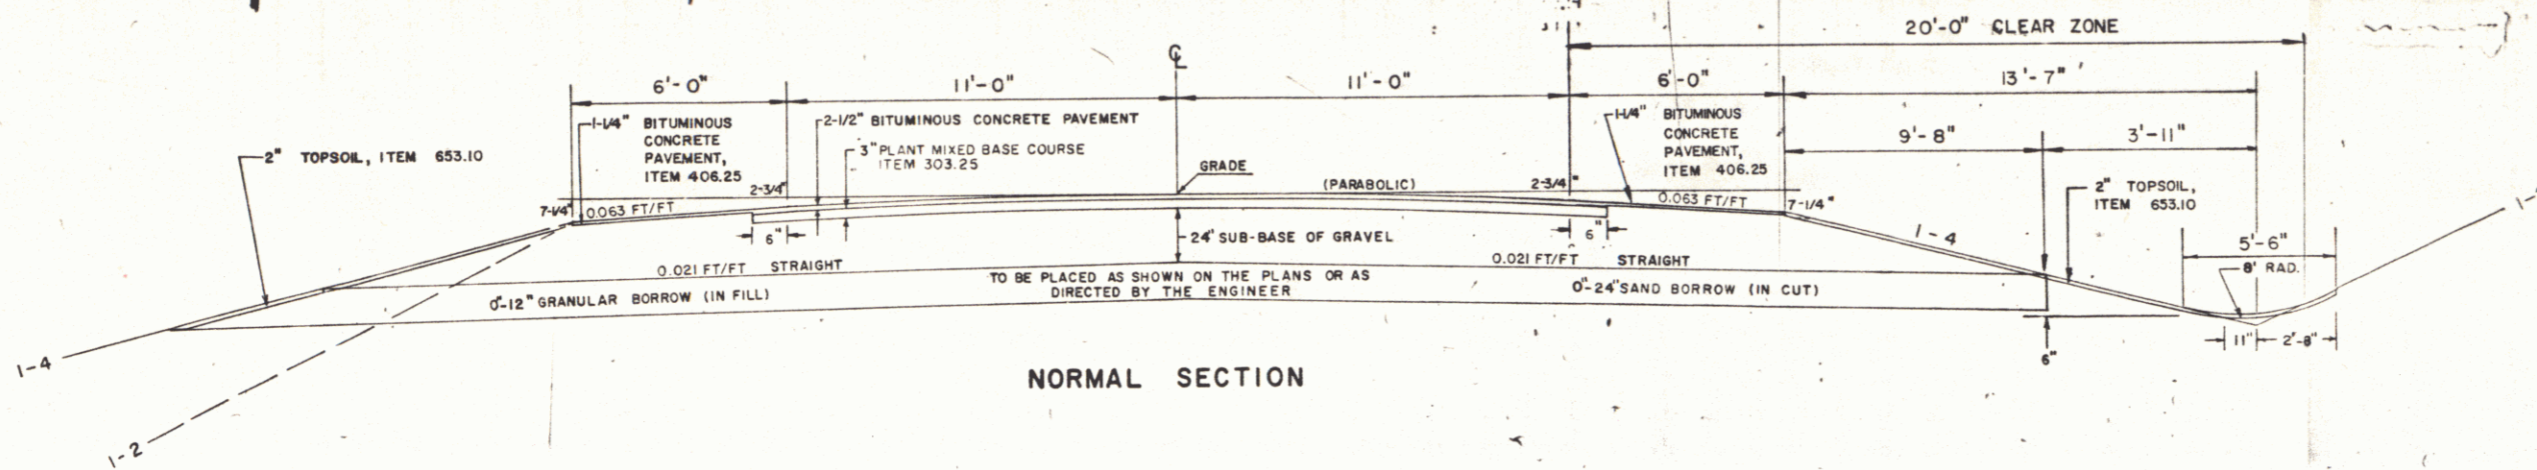

TOWN OF ELMORE

STATE OF VERMONT
 AGENCY OF TRANSPORTATION

DRAWN BY: *[Signature]* TRACED BY: *[Signature]*
 PROJ. BH S0241(8)S SHEET 2 OF 6