
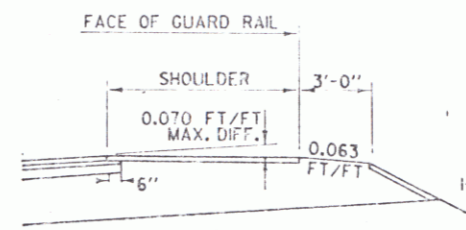
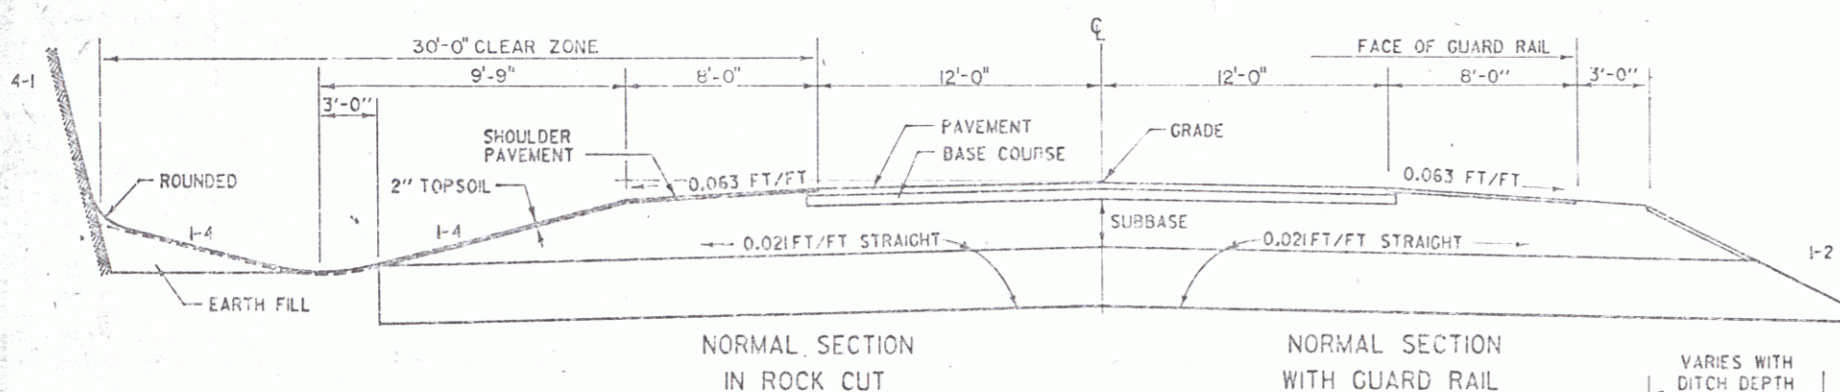
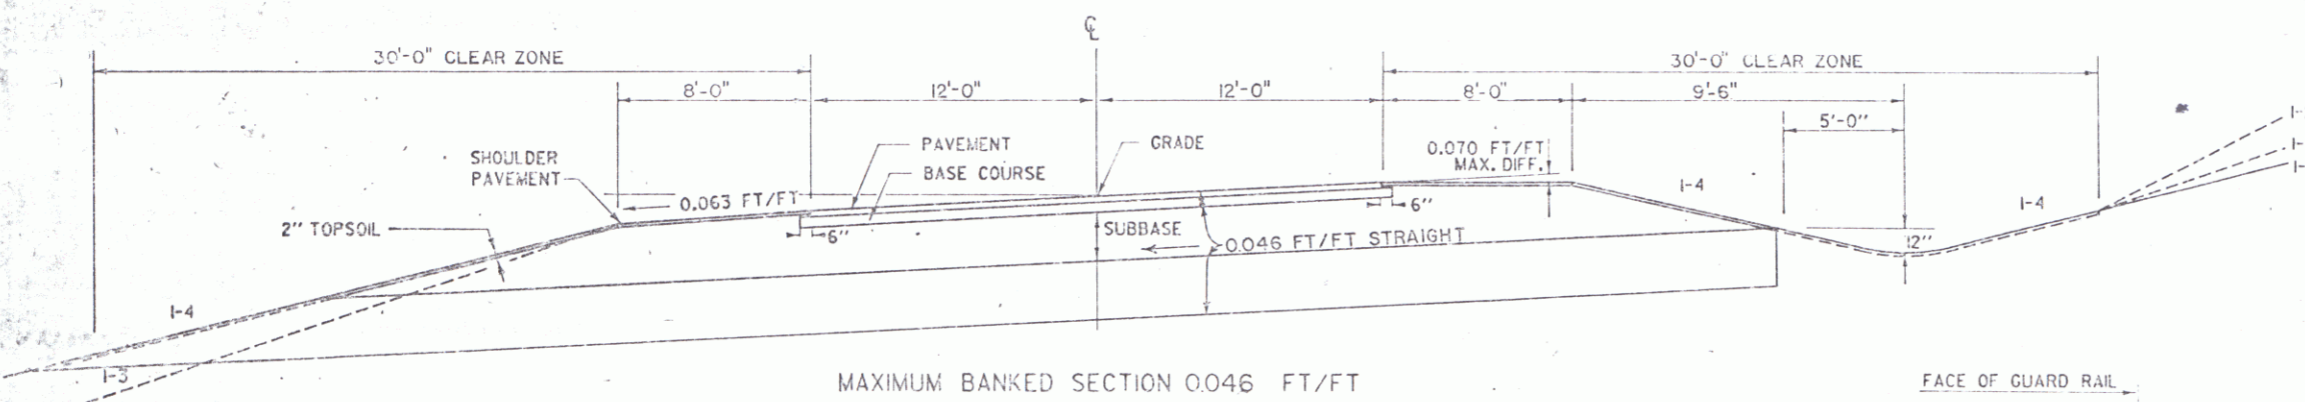


# TYPICAL SECTIONS



MATERIAL ITEM	THICKNESS TOLERANCE
PAVEMENT	+ 1/4"
BASE COURSE	+ 1/2"
SUBBASE	+ 1"
GRANULAR BORROW	+ 1"
SAND BORROW	+ 1"

- 1/2" BITUMINOUS CONCRETE PAVEMENT, TYPE III
- 3" BASE COURSE OF BITUMINOUS CONCRETE PAVEMENT, TYPE I
- 24" SUBBASE OF CRUSHED GRAVEL (FINE GRADED)
- 24" SAND BORROW (AS INDICATED ON THE PLANS)

SHOULDERS 1-1/2" BITUMINOUS CONCRETE PAVEMENT

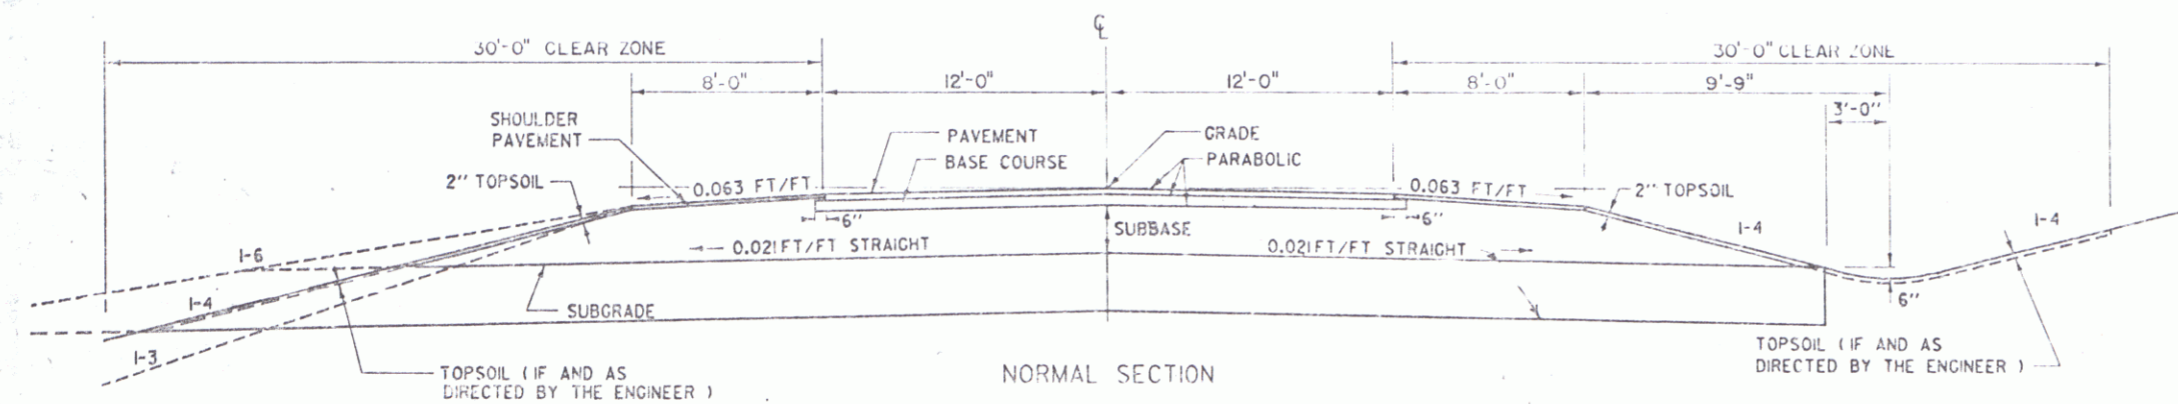



FOR SLOPES IN SOLID ROCK EXCAVATION AND DRILLING AND BLASTING OF SOLID ROCK SUBGRADE, SEE STANDARD SHEET A-60.

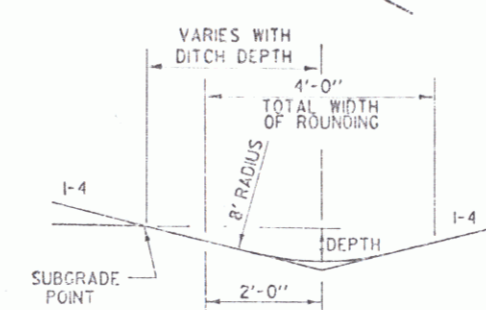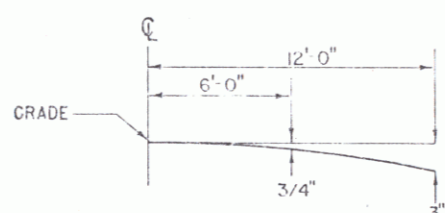

## SEEDING FORMULA RURAL AREAS

% WT.	LBS./A.	NAME	PUR %	GER %
3.33	2	CROWN VETCH	97	75
50.00	30	CREeping RED FESCUE	98	85
8.33	5	TIMOTHY	99	85
16.67	10	PERENNIAL RYE GRASS (VAR. PENNFINE)	95	85
8.34	5	ALFALFA (VAR. SARANAC)	99	85
8.33	5	BIRDFOOT TREFOIL (VAR. EMPIRE)	98	85
5.00	3	HIGHLAND BENT GRASS	92	85
100.00	60			

THE SEED MIXTURE SHALL NOT HAVE A WEED CONTENT EXCEEDING 0.40% BY WEIGHT AND SHALL BE FREE OF ALL NOXIOUS WEED SEED.  
 SEED- TO BE APPLIED PER SEEDING FORMULAS DIRECTED BY THE ENGINEER.  
 FERTILIZER- FORMULA 10-20-10 TO BE USED WITH SEED, APPLIED AT THE RATE OF 500 LBS./ACRE  
 AGRICULTURAL LIMESTONE- TO BE APPLIED AT THE RATE OF 2 TONS/ACRE OR AS DIRECTED BY THE ENGINEER.  
 HAY MULCH- TO BE PLACED ON EARTH SLOPES AT THE RATE OF 2 TONS/ACRE, OR AS DIRECTED BY THE ENGINEER.  
 TOPSOIL- TO BE USED WITH SEED AS INDICATED ON THE PLANS, OR AS DIRECTED BY THE ENGINEER.  
 MARKER POSTS- TO BE PLACED AS DIRECTED BY THE ENGINEER.  
 SLOPE ROUNDING- ALL CUT SLOPES TO BE ROUNDED IN ACCORDANCE WITH STANDARD SHEET D-5.  
 PAY LIMITS OF SAND BORROW WHEN USED IN CONJUNCTION WITH UNDERDRAIN- SEE STANDARD SHEET D-2.

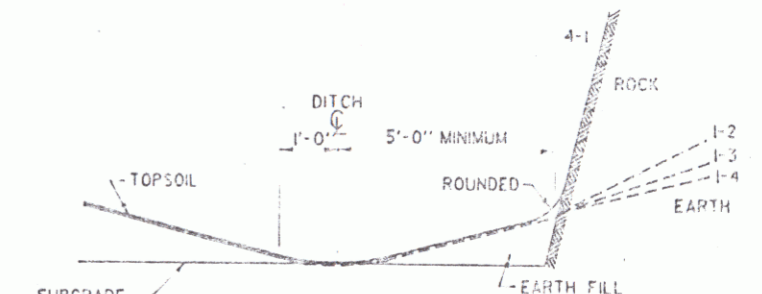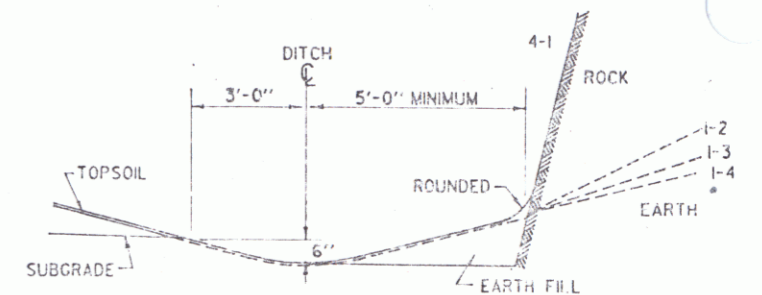

SURVEYED BY LEWIN DATE 3/85  
 DRAWN BY CAD DATE  
 TRACED BY NEWHALL DATE 7/85  
 BLOOMFIELD  
 BR 034-3(13)S  
 ROW SHEET 2 OF 7

JAN 06 1993