



# VT. 14 TYPICAL SECTIONS

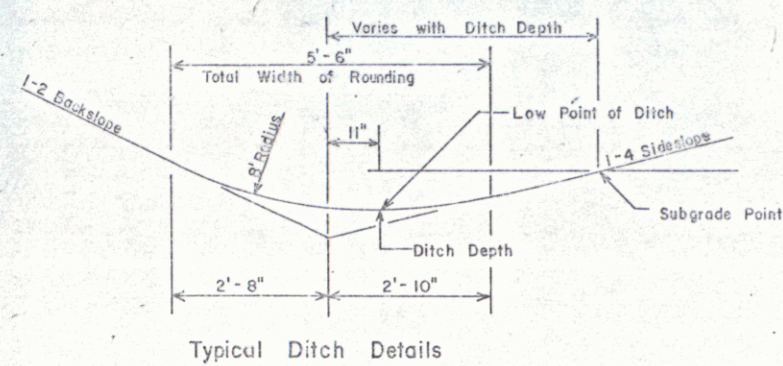


Typical Ditch Details


4 3/4" Bituminous Concrete Pavement (2-1 1/2 Lifts of Type II)  
 2 3/8" Subbase of Gravel  
 Shoulders: 1 1/4" Bituminous Concrete Pavement  
 0"-12" Granular Borrow (In Fills) } as indicated on the plans or  
 0"-24" Sand Borrow (In Cuts) } as directed by the Engineer

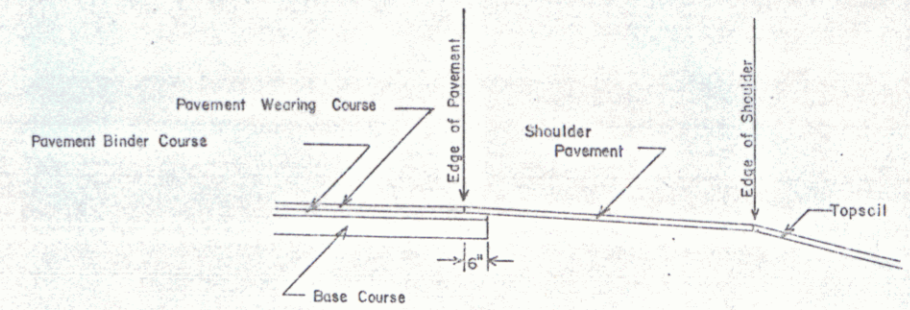

Detail of Shoulder Paving

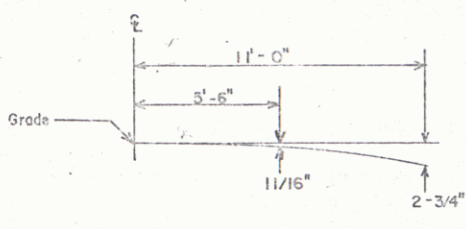


Parabolic Detail

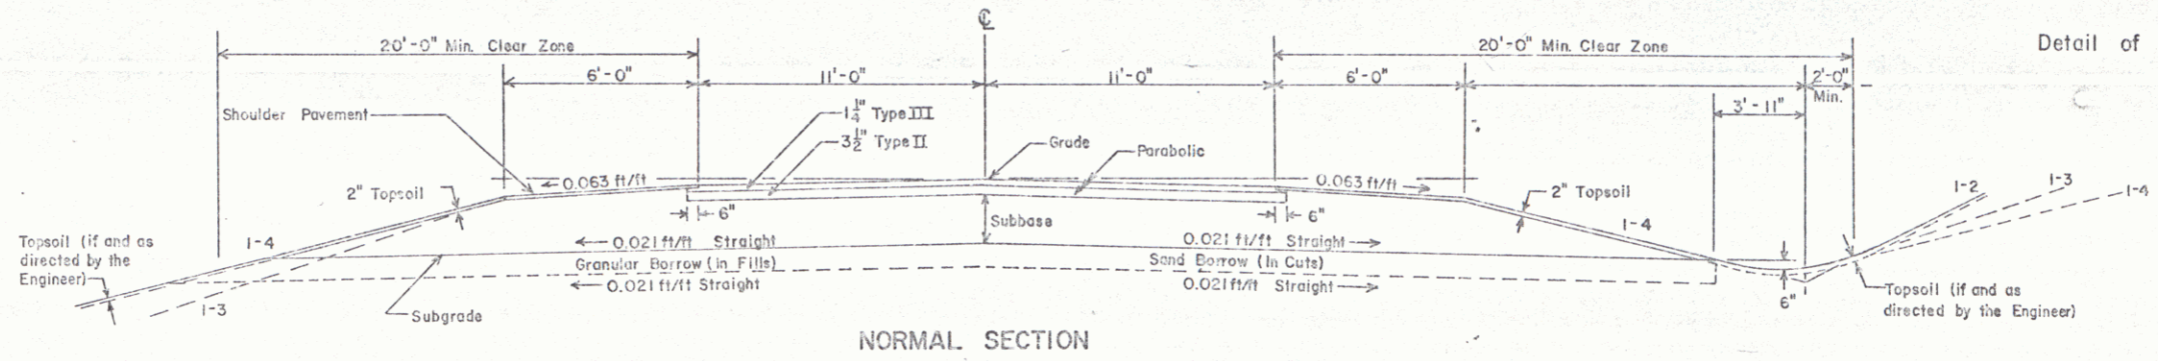

NORMAL SECTION

Material Item	Thickness	Tolerance
Pavement	± 1/4"	
Base Course	± 1/2"	
Subbase	± 1"	
Granular Borrow	± 1"	
Sand Borrow	± 1"	

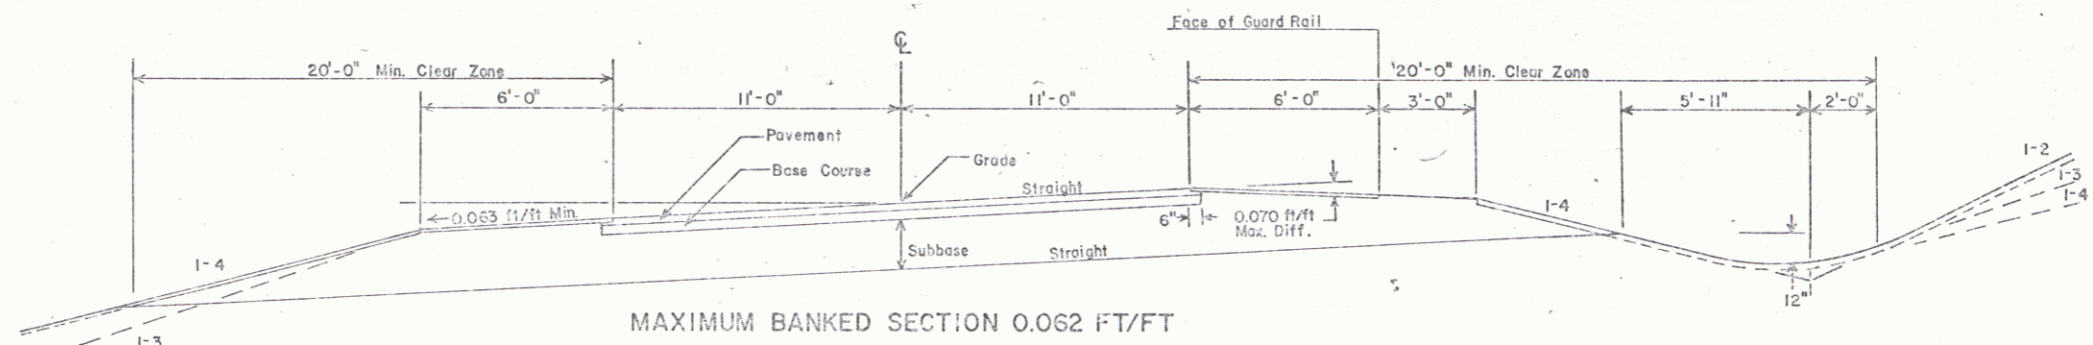

MAXIMUM BANKED SECTION 0.062 FT/FT

**SEEDING FORMULA, ITEM 651.10 URBAN AREAS**

% WT	LBS/A	NAME	PUR%	SERM%
37.50	30	CREEPING RED FESCUE	90	85
31.25	25	KENTUCKY BLUEGRASS	85	75
31.25	25	PERENNIAL RYE GRASS	95	90
100.00	80			

THE SEED MIXTURE SHALL NOT HAVE A WEED CONTENT EXCEEDING 0.40% BY WEIGHT AND SHALL BE FREE OF ALL NOXIOUS WEED SEED.

MARKER POSTS, (WOOD OR STEEL AS SPECIFIED) TO BE PLACED AS DIRECTED BY THE ENGINEER


FERTILIZER, ITEM 651.101  
 FORMULA 10-20-10 TO BE USED WITH SEED, ITEM 651.10 APPLIED AT THE RATE OF 500 LBS/ACRE

AGRICULTURAL LIMESTONE, ITEM 651.20 TO BE APPLIED AT RATE OF 2 TONS/ACRE OR AS DIRECTED BY THE ENGINEER

HAY MULCH, ITEM 651.25 TO BE PLACED ON EARTH SLOPES AT THE RATE OF 2 TONS/ACRE

TOPSOIL, ITEM 653.35 TO BE USED WITH SEED, ITEM 651.10 IN RESIDENTIAL AREAS, AS DIRECTED BY THE ENGINEER

SEE STANDARD SHEET B-5 FOR TYPICAL SLOPE ROUNDING  
 SEE STANDARD SHEET D-2 FOR PAY LIMITS OF SAND BORROW WHEN USED IN CONJUNCTION WITH UNDERDRAIN

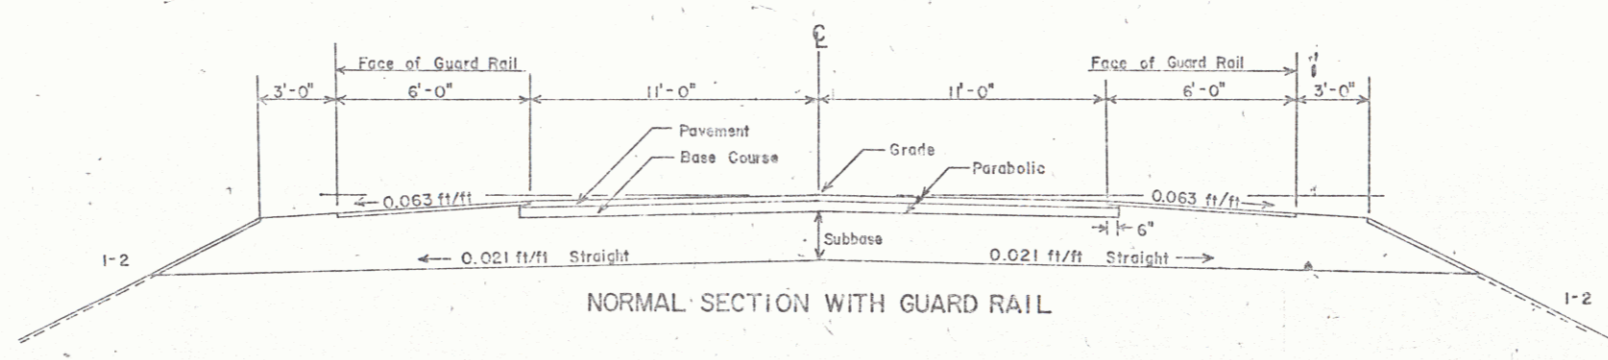

NORMAL SECTION WITH GUARD RAIL

FEB 05 1992

ROW PLANS

SURVEYED BY \_\_\_\_\_ DATE \_\_\_\_\_  
 DRAWN BY J. REDMOND DATE 9-69  
 TRACED BY \_\_\_\_\_ DATE \_\_\_\_\_

EAST MONTEPELIER  
 BHF 037-2(7)S  
 SHEET 2 OF 9