




# TYPICAL SECTIONS - TOWN HIGHWAYS

MATERIAL ITEM	THICKNESS TOLERANCE
PAVEMENT (TOTAL DEPTH)	$\pm \frac{1}{4}$ "
SUBBASE	$\pm \frac{1}{2}$ "
SAND BORROW	$\pm \frac{1}{2}$ "

- 3" AGGREGATE SURFACE COURSE
- 12" SUBBASE
- 24" SAND BORROW IF AND AS DIRECTED BY THE ENGINEER

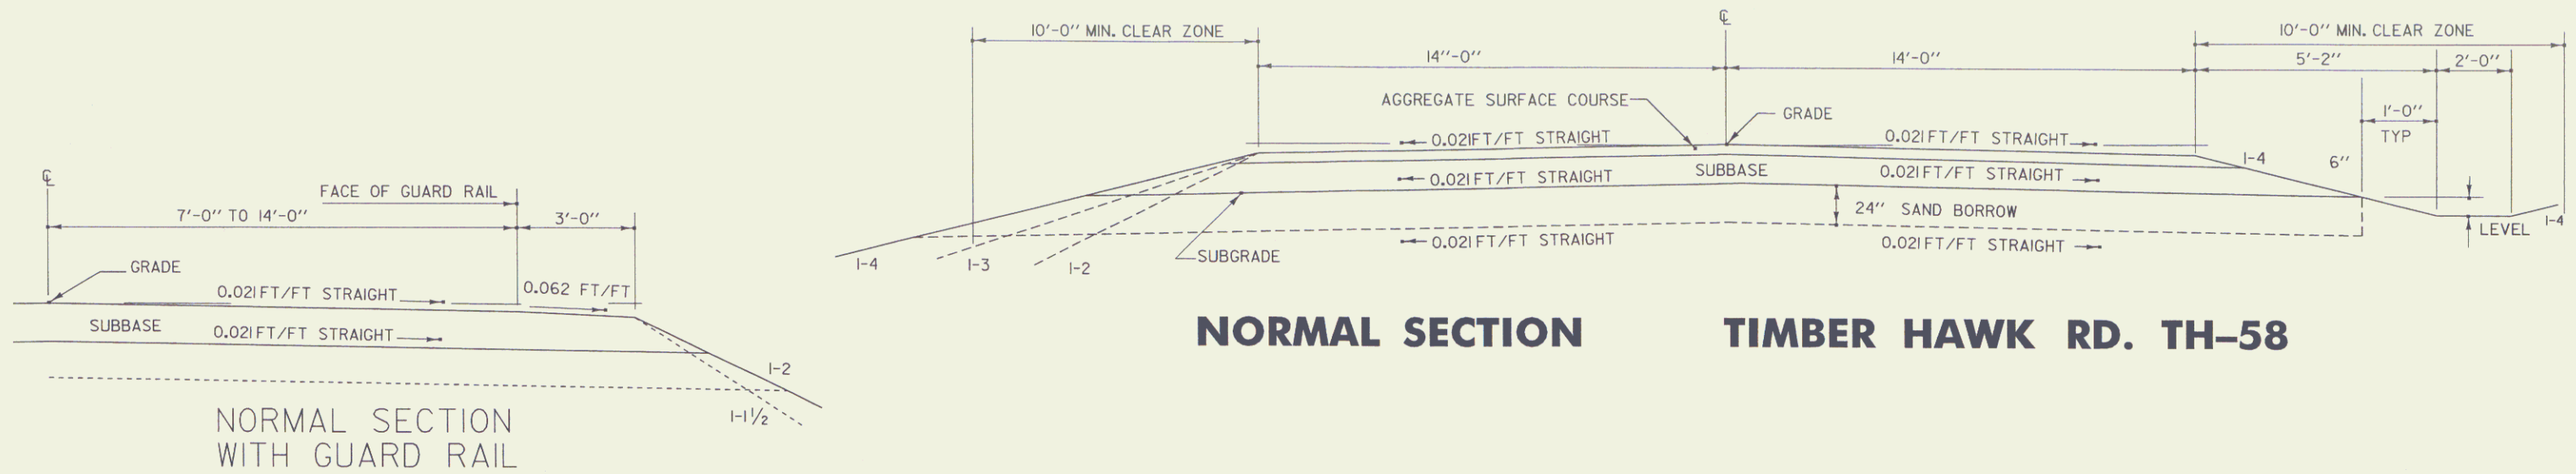

- STA 80+17 - 84+00 4 1/2" BITUMINOUS CONCRETE PAVEMENT (1 3/4" TYPE III OVER 2 3/4" TYPE II)
- STA 84+00 - 84+75 3" AGGREGATE SURFACE COURSE
- 18" SUBBASE
- 24" SAND BORROW IF AND AS DIRECTED BY THE ENGINEER
- SHOULDERS 4 1/2" BITUMINOUS CONCRETE PAVEMENT (1 3/4" TYPE III OVER 2 3/4" TYPE II)

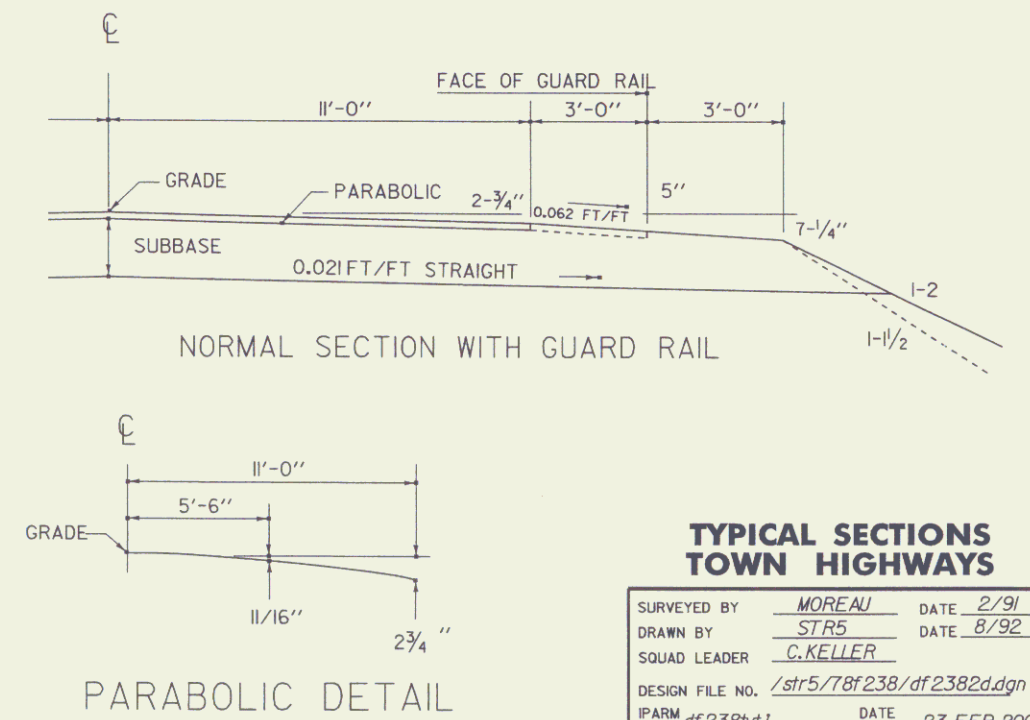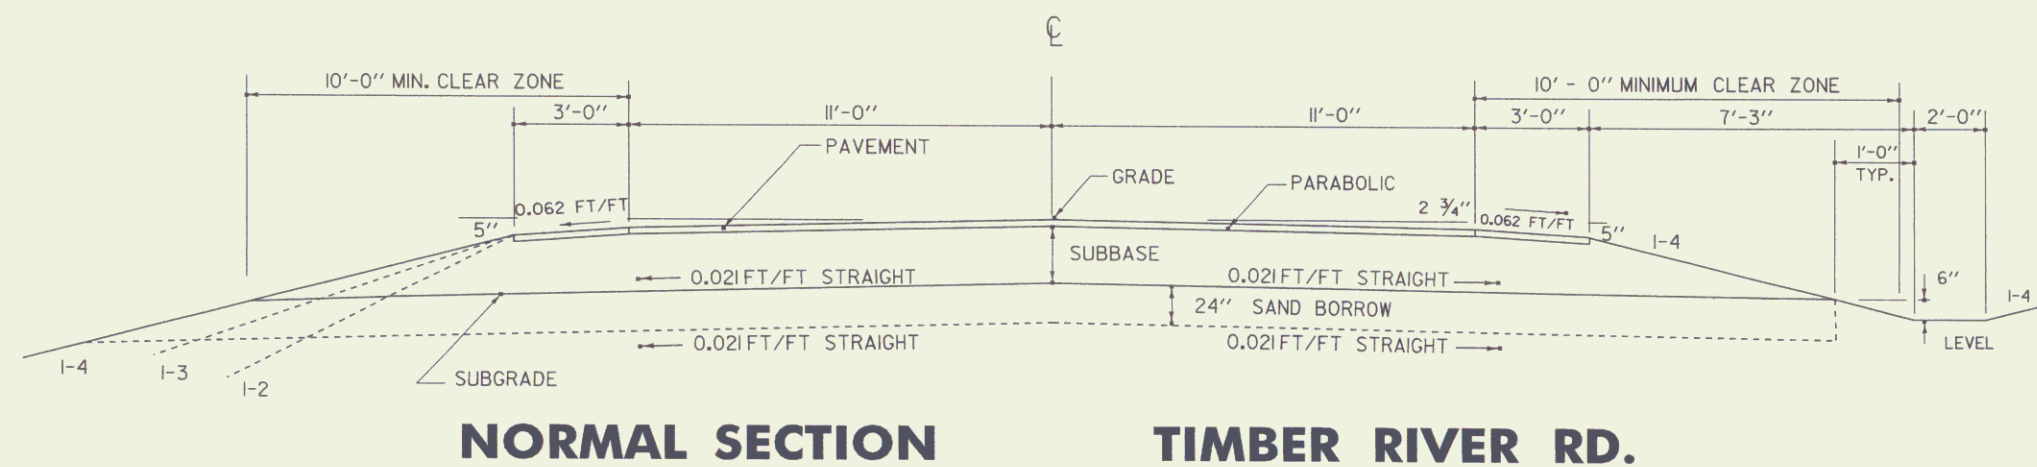

TYPICAL SECTIONS TOWN HIGHWAYS	
SURVEYED BY	MOREAU DATE 2/91
DRAWN BY	STR5 DATE 8/92
SQUAD LEADER	C. KELLER
DESIGN FILE NO.	/str5/78f238/df2382d.dgn
FILE	df2381y1j DATE PLOTTED 23-FEB-2001
PROJ. NAME	STOCKBRIDGE
PROJ. NO.	BRF 013-4 (21)
R. O. W.	SHEET 3 OF 17 SHEETS