



VT. RTE. 73 TYPICAL SECTIONS

- SHOULDERS
- 2" BITUMINOUS CONCRETE PAVEMENT ITEM 406.25 (± 1/4" FOR TOTAL THICKNESS) (TO BE APPLIED IN TWO 1" COURSES)
 - 3" PLANT MIXED BASE COURSE ITEM 303.25 (± 1/2")
 - 24" SUB-BASE OF CRUSHED GRAVEL, COARSE GRADE ITEM 301.25 (± 1")
 - 2" BITUMINOUS CONCRETE PAVEMENT ITEM 406.25 (± 1/2")
 - 0-12" GRANULAR BORROW ITEM 203.32 (IN FILLS)
 - 0-24" SAND BORROW ITEM 203.31 (IN CUTS)
- (TO BE PLACED AS NOTED ON THE PLANS)
(OR AS DIRECTED BY THE ENGINEER)
- PERMISSIBLE TOLERANCES IN PARENTHESIS APPLY TO THICKNESS ONLY

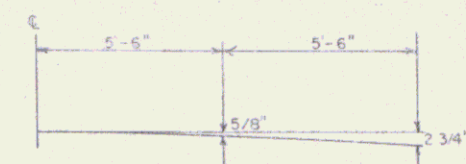

PARABOLIC DETAILS

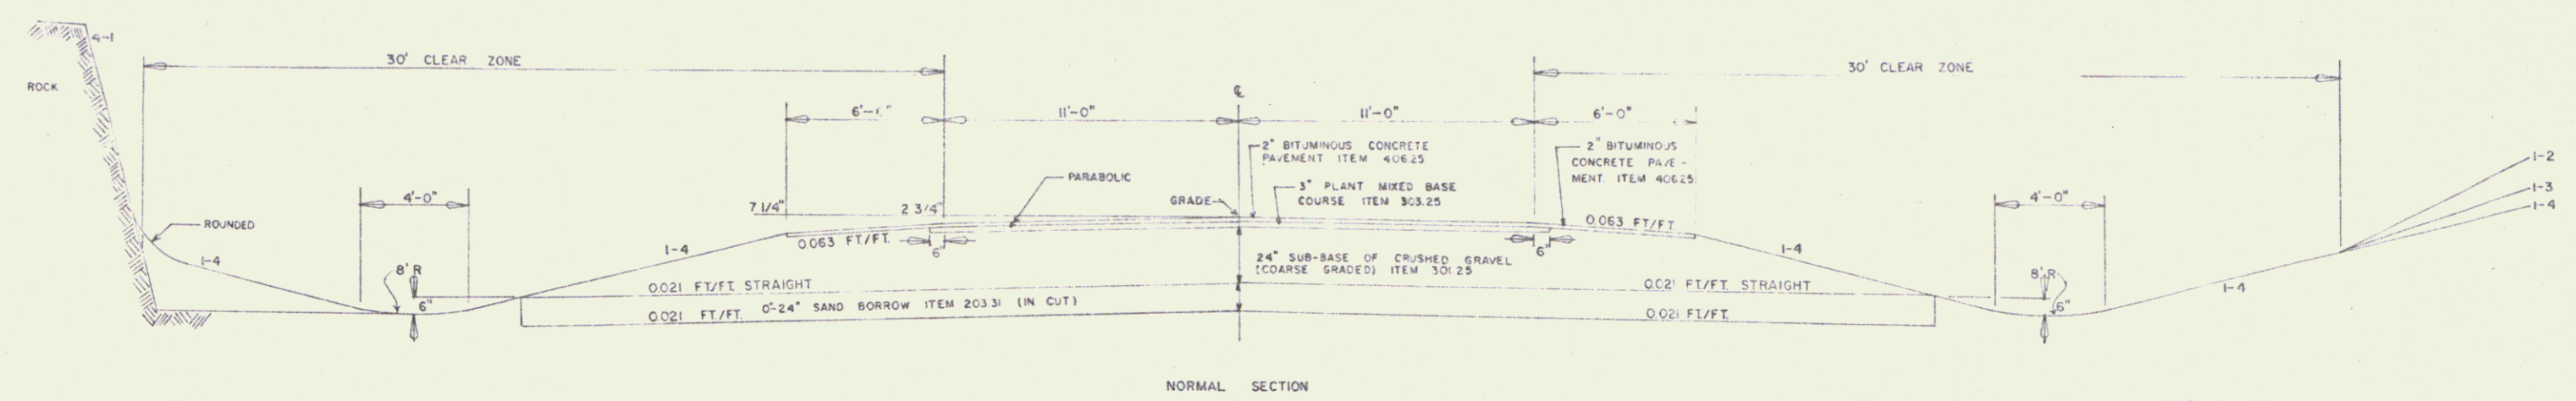

NORMAL SECTION

SEEDING FORMULA, ITEM 651.10 RURAL AREAS

% WT.	LBS./A.	NAME	PUR. %	GERM. %
3.33	2	CROWN VETCH	97	75
50.00	30	CREeping RED FESCUE	98	95
8.33	5	TIMOTHY	99	85
5.00	3	HIGHLAND BENT GRASS	92	85
16.67	10	PERENNIAL RYE GRASS (VAR. PENNFIRE)	95	85
8.34	5	ALFALFA (VAR. SARANAC)	99	85
8.33	5	BIRDFOOT TREFOL	98	85
100.00	60			

THE SEED MIXTURE SHALL NOT HAVE A WEED CONTENT EXCEEDING 0.40% BY WEIGHT AND SHALL BE FREE FROM ALL NOXIOUS WEED SEED

HAY MULCH, ITEM 651.25, TO BE PLACED ON ALL EARTH SLOPES AT THE RATE OF TWO TONS PER ACRE

FERTILIZER, ITEM 651.15, SHALL BE MIXED AS FOLLOWS

NITROGEN 10%
PHOSPHORUS 20%
POTASH 10%


FERTILIZER SHALL BE DELIVERED IN BAGS OF NOT TO EXCEED 100 LBS EACH AND IS TO BE APPLIED AT THE RATE OF 500 LBS PER ACRE.

AGRICULTURAL LIMESTONE, ITEM 651.20 TO BE APPLIED TO ALL EARTH SLOPES AT THE RATE OF TWO TONS PER ACRE OR AS DIRECTED BY THE ENGINEER.

WOOD MARKER POSTS, ITEM 619.15 TO BE PLACED AS DIRECTED BY THE ENGINEER.

FOR ROUNDING OF SLOPES, SEE STANDARD SHEET B-5

FOR SANDY SOILS, THE FERTILIZER MIX SHOULD BE CHANGED TO NITROGEN-10% PHOSPHORUS-20% POTASH-20%

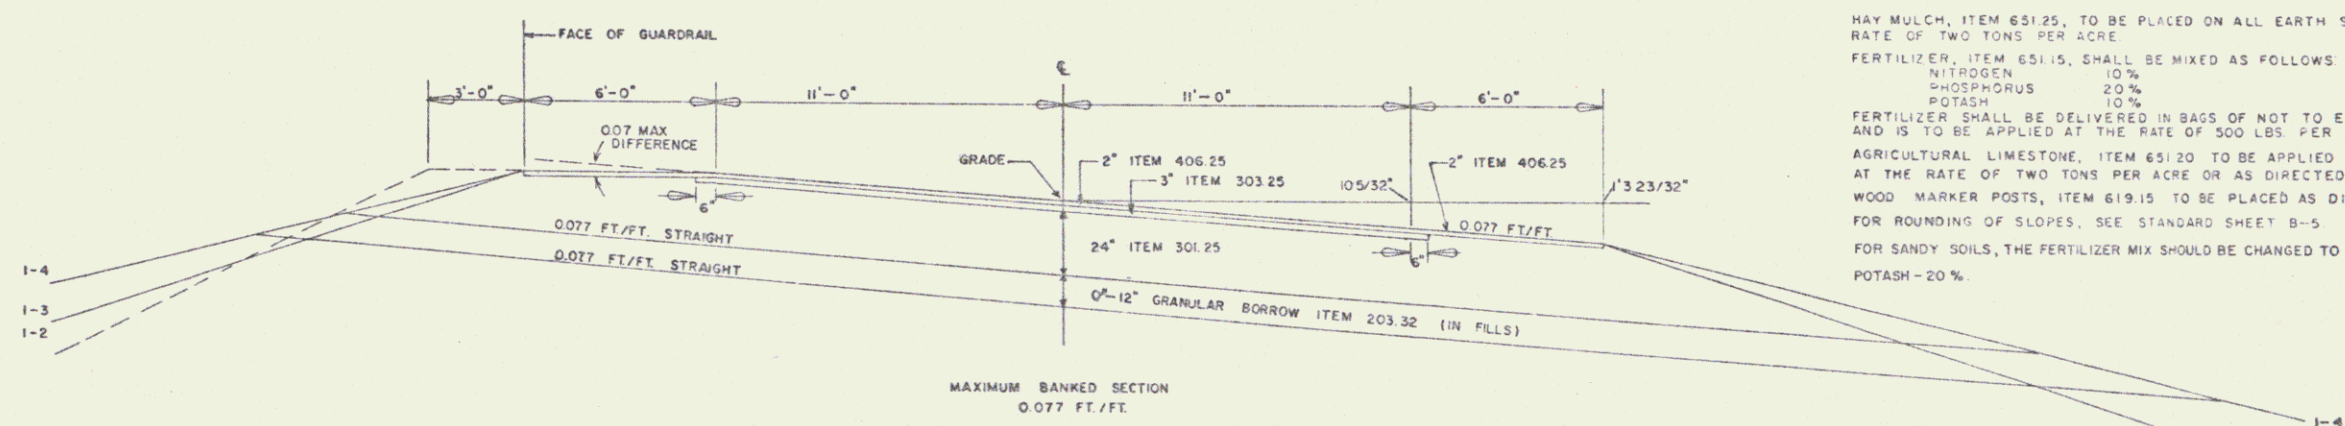

MAXIMUM BANKED SECTION
0.077 FT./FT.

FOR SLOPES IN SOLID ROCK EXCAVATION AND DRILLING AND BLASTING OF SOLID ROCK SUBGRADE, SEE STD. SHEET A-60

SURVEYED BY MOREAU DATE 3/80
 DRAWN BY SCOTT DATE 2/81
 TRACED BY SCOTT DATE 2/81

PROJ. ROCHESTER FH-BRS 0162 (R)
 SHEET 2 OF 8 2