


TYPICAL SECTIONS

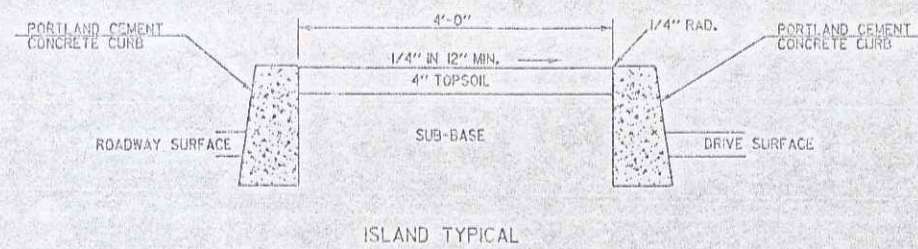



- 2 1/2" BITUMINOUS CONCRETE PAVEMENT, ITEM 406.25 (1/4" TYPE III OVER 1/4" TYPE III)
- 3" BASE COURSE OF BITUMINOUS CONCRETE PAVEMENT, ITEM 406.25 (TYPE I)
- 24" SUBBASE OF DENSE GRADED CRUSHED STONE, ITEM 301.35
- 1/4" SHOULDERS: BITUMINOUS CONCRETE PAVEMENT, ITEM 406.25

- 0-24" SAND BORROW, ITEM 203.31
 - 0-12" GRANULAR BORROW, ITEM 203.32
- TO BE PLACED AS NOTED ON THE PLANS OR AS DIRECTED BY THE ENGINEER


SEEDING FORMULA, ITEM 651J5 RURAL AREAS

% WT.	LBS./A.	NAME	PLR %	GERM %
3.33	2	CROWN VETCH	97	75
50.00	30	CREEPING RED FESCUE	99	85
8.33	5	TIMOTHY	99	85
16.67	10	PERENNIAL RYE GRASS (VAR. PENNINE)	95	85
8.34	5	ALFALFA (VAR. SARAJAC)	99	85
8.33	5	BUDSPOOT TREFOR (VAREMPREY)	98	85
5.00	3	HIGHLAND BENT GRASS	92	85
100.00	60			

THE SEED MIXTURE SHALL NOT HAVE A WEED CONTENT EXCEEDING 0.40% BY WEIGHT AND SHALL BE FREE OF ALL NOXIOUS WEED SEED.
 SEED- TO BE APPLIED PER SEEDING FORMULAS DIRECTED BY THE ENGINEER.
 FERTILIZER- FORMULA 10-20-10 TO BE USED WITH SEED, APPLIED AT THE RATE OF 500 LBS./ACRE OR AS DIRECTED BY THE ENGINEER.
 AGRICULTURAL LIMESTONE- TO BE APPLIED AT THE RATE OF 2 TONS/ACRE OR AS DIRECTED BY THE ENGINEER.
 HAY MULCH- TO BE PLACED ON EARTH SLOPES AT THE RATE OF 2 TONS/ACRE OR AS DIRECTED BY THE ENGINEER.
 TOPSOIL- TO BE USED WITH SEED AS INDICATED ON THE PLANS, OR AS DIRECTED BY THE ENGINEER.
 MARKER POSTS- TO BE PLACED AS DIRECTED BY THE ENGINEER.
 SLOPE ROUNDING- ALL CUT SLOPES TO BE ROUNDED IN ACCORDANCE WITH STANDARD SHEET B-5.
 PAY LIMITS OF SAND BORROW WHEN USED IN CONJUNCTION WITH UNDERDRAIN- SEE STANDARD SHEET D-2.

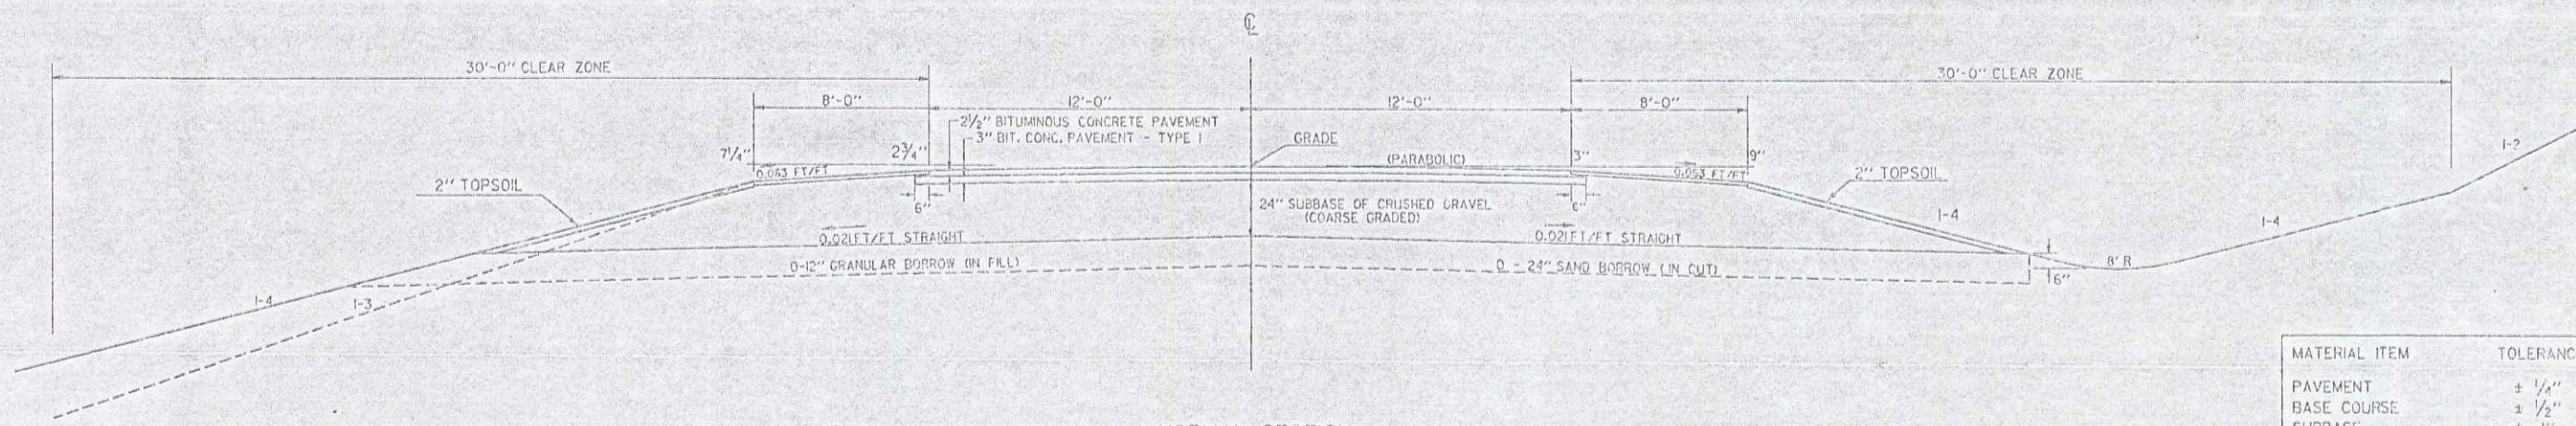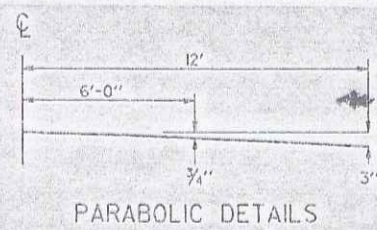

MATERIAL ITEM	TOLERANCE
PAVEMENT	± 1/4"
BASE COURSE	± 1/2"
SUBBASE	± 1"
GRANULAR BORROW	± 1"
SAND BORROW	± 1"

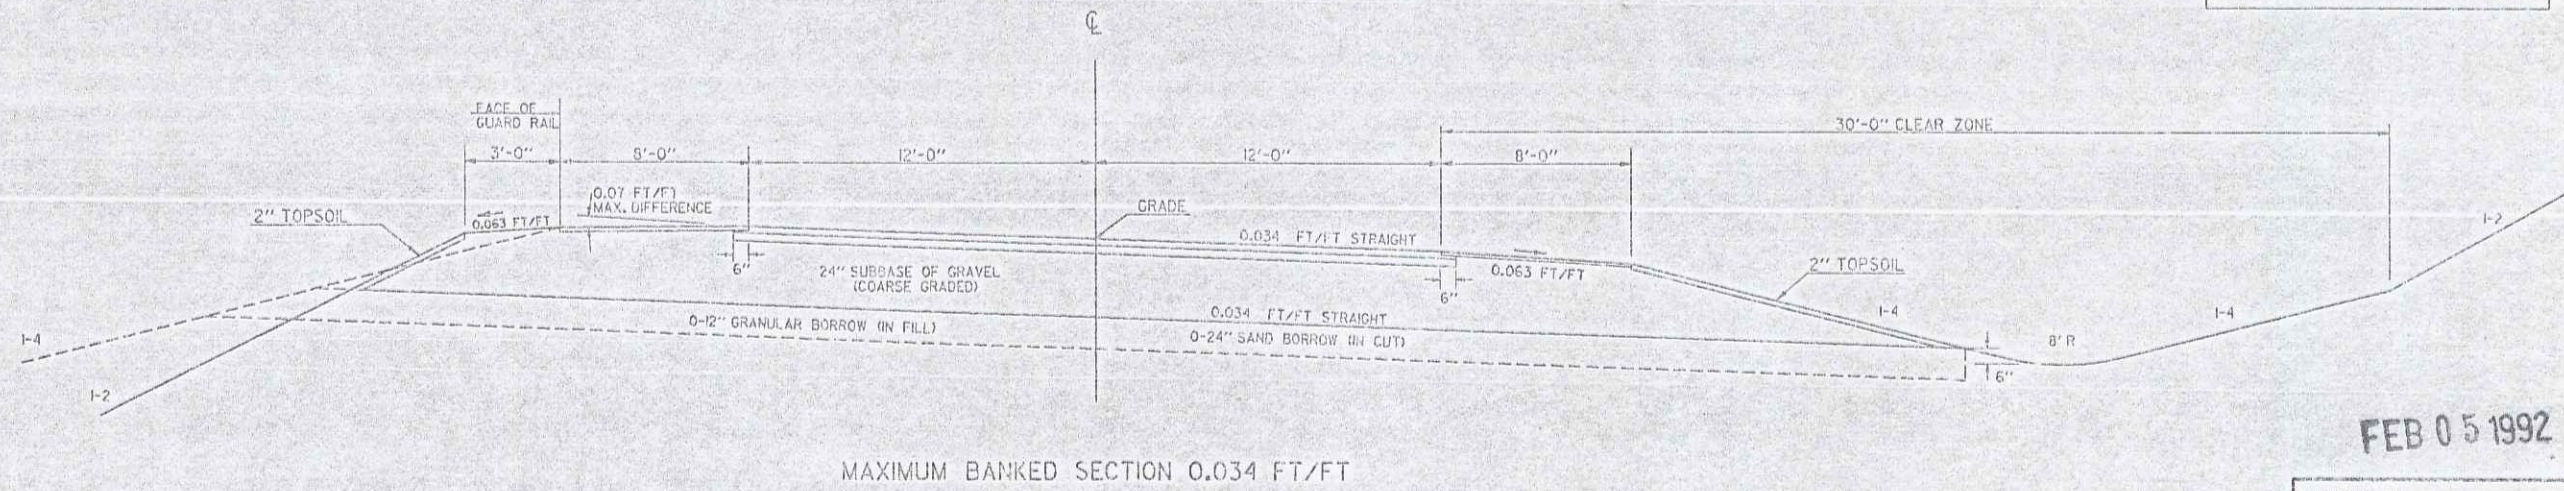

DATUM
 VERTICAL _____
 HORIZONTAL _____

FEB 05 1992
 78F327TYP
 SURVEYED BY _____ DATE _____
 DRAWN BY BEYOR DATE 3-87
 SQUAD LEADER HALE
 DESIGN FILE NO. 78F327 DATE 9-23-87
 GROTON
 F 026-1 (27)S
 R.O.W SHEET 2 OF 16