

646.622 TEMPORARY 6" WHITE LINE, PAINT
 646.426 DURABLE 6" WHITE LINE, RECESSED POLYUREA OR
 646.428 DURABLE 6" WHITE LINE, RECESSED THERMOPLASTIC OR
 646.429 DURABLE 6" WHITE LINE, RECESSED EPOXY PAINT,
 116.600 TO 122.700 SOLID RT
 116.600 TO 122.700 DASHED CL

646.632 TEMPORARY 6" YELLOW LINE, PAINT
 646.436 DURABLE 6" YELLOW LINE, RECESSED POLYUREA OR
 646.438 DURABLE 6" YELLOW LINE, RECESSED THERMOPLASTIC OR
 646.439 DURABLE 6" YELLOW LINE, RECESSED EPOXY PAINT,
 116.600 TO 122.700 SOLID LT

613.10 STONE FILL, TYPE I
 613.11 STONE FILL, TYPE II
 SEE DITCH CLEANING SHEET

620.12 CHAIN-LINK FENCE, 6 FEET
 620.21 BRACING ASSEMBLY FOR CHAIN-LINK FENCE, 6 FEET



120.758 LT & RT (100') BRIDGE 73 N
 215' = 115' LT, 100' RT

201.31 THINNING AND TRIMMING FOR SIGNS
 119.740 RT

604.412, 604.415 REHAB. DROP INLETS,
 CATCH BASINS, OR MANHOLES,
 CLASS I OR CLASS II

117.301 RT (DI) 118.472 RT (DI) 120.159 RT (DI)
 117.356 RT (DI) 118.519 RT (DI) 120.159 LT (DI)
 117.413 RT (DI) 118.547 RT (DI) 120.196 RT (DI)
 117.460 RT (DI) 119.977 RT (DI) 120.664 RT (DI)
 117.516 RT (DI) 119.977 LT (DI) 120.708 RT (DI)
 117.576 RT (DI) 120.026 RT (DI) 120.754 RT (DI)
 117.771 RT (DI) 120.026 LT (DI) 120.773 RT (DI)
 118.331 RT (DI) 120.073 RT (DI) 122.402 RT (DI)
 118.359 RT (DI) 120.073 LT (DI) 122.462 RT (DI)
 118.397 RT (DI) 120.121 RT (DI) 122.529 RT (DI)
 118.434 RT (DI) 120.121 LT (DI) 122.580 RT (DI)

616.305 BITUMINOUS CONCRETE CURB, TYPE A
 616.41 REMOVAL OF EXISTING CURB
 621.17 CABLE GUARDRAIL
 621.20 STEEL BEAM GUARDRAIL, GALVANIZED
 621.205 STEEL BEAM GUARDRAIL, GALVANIZED W/8 FEET POSTS
 621.50 MANUFACTURED TERMINAL SECTION, FLARED
 621.51 MANUFACTURED TERMINAL SECTION, TANGENT
 621.60 ANCHOR FOR STEEL BEAM RAIL
 621.65 ANCHOR FOR CABLE RAIL
 621.75 REMOVE AND RESET GUARDRAIL
 621.76 REPLACE GUARDRAIL POST ASSEMBLY
 621.77 REPLACE GUARDRAIL BEAM UNIT
 621.80 REMOVAL AND DISPOSAL OF GUARDRAIL
 900.620 SPECIAL PROVISION (DELINEATOR WITH STEEL POST)
 900.640 SPECIAL PROVISION (REPLACEMENT OF GUARDRAIL CABLE)
 SEE ITEM DETAIL SUMMARY SHEETS

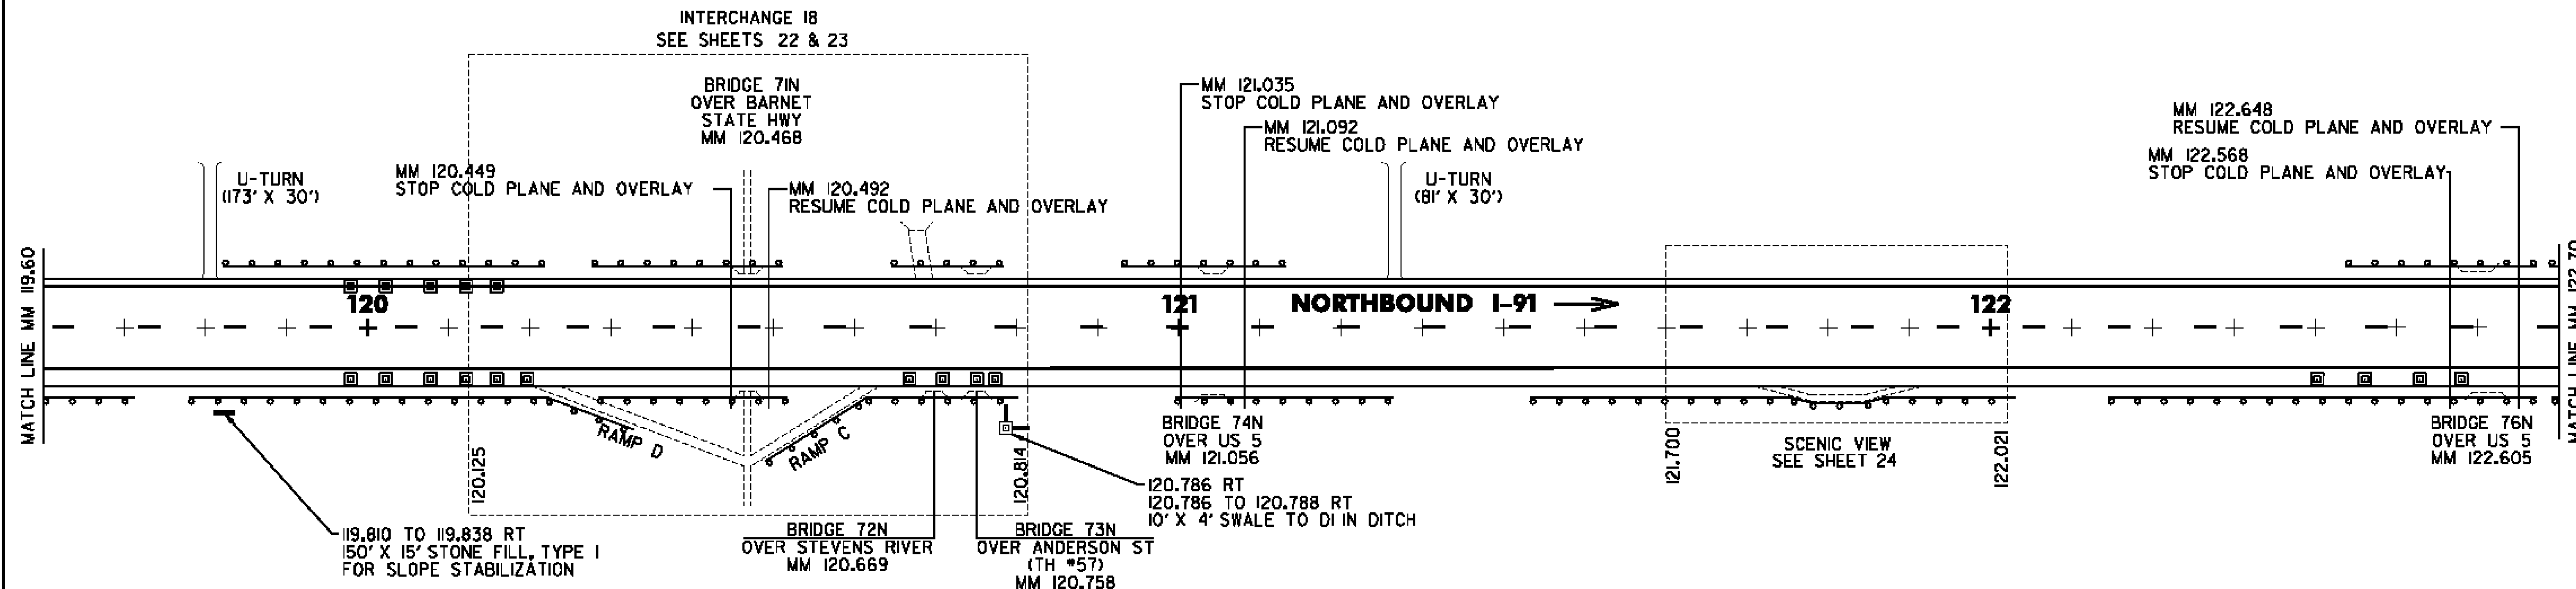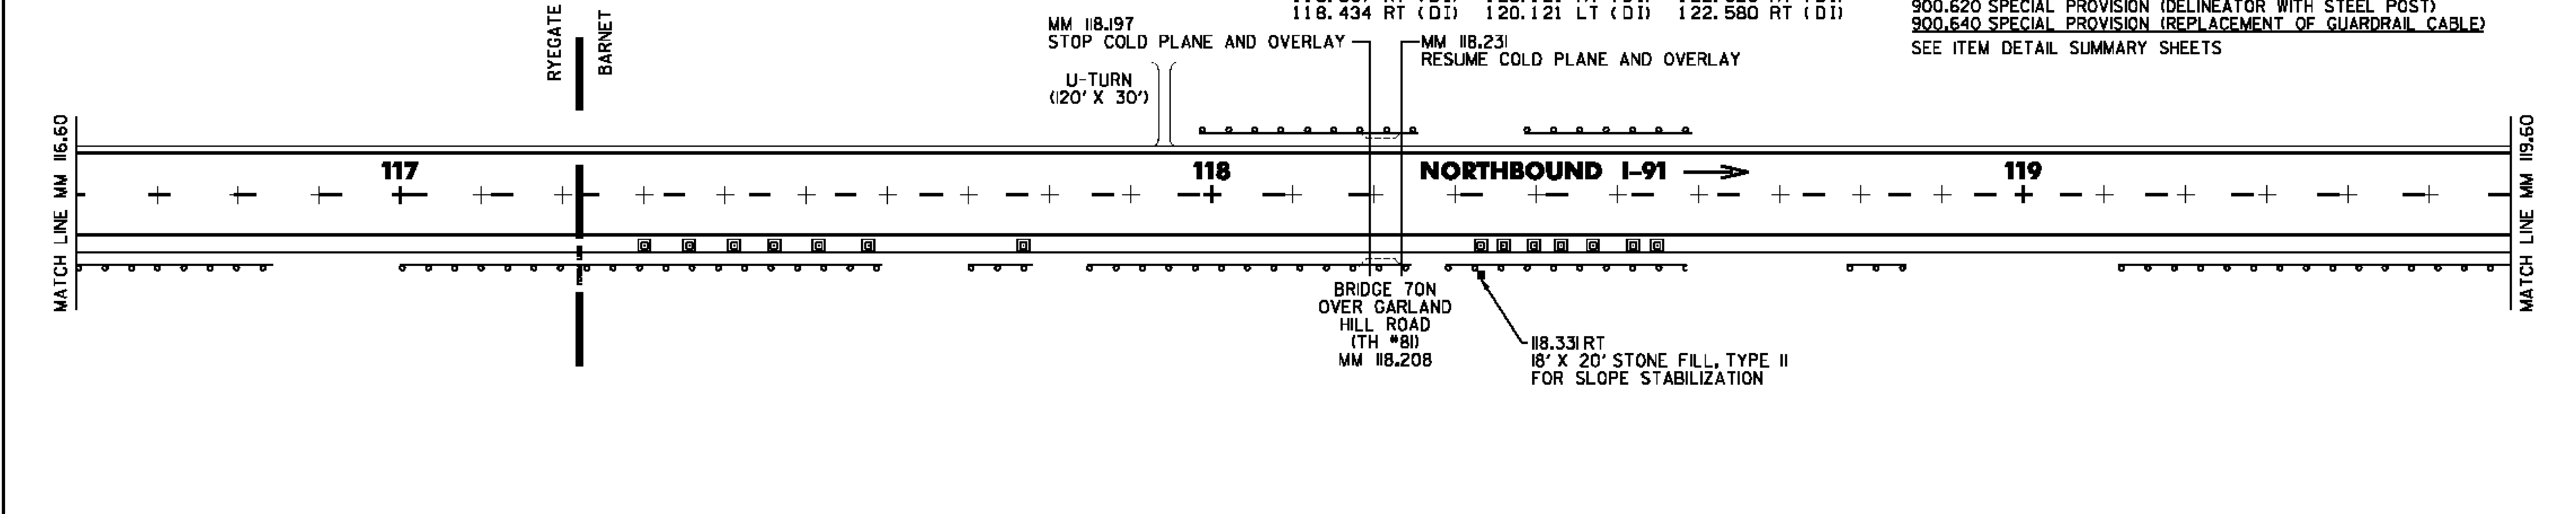

PAVEMENT CORES IN (SHOULDERS)

#	MM	DEPTH	PCC
18	117.00	3.0'	NO
19	117.50	3.25'	NO
20	118.00	3.0'	NO
21	118.50	2.375'	NO
22	119.00	3.375'	NO
23	119.50	4.5'	NO
24	120.00	3.0'	NO
25	120.50	3.625'	NO
26	121.00	4.0'	NO
27	121.50	3.5'	NO
28	121.85	5.5'	NO
29	121.90	5.0'	NO
30	122.05	2.625'	NO
31	122.50	2.625'	NO

- LEGEND
- = EXISTING GUARDRAIL
 - = PROPOSED GUARDRAIL
 - = YELLOW LINE
 - = WHITE LINE
 - = DELINEATOR
 - = DI

MAINLINE LAYOUT 2

PROJECT NAME: NEWBURY-ST. JOHNSBURY
 PROJECT NUMBER: IM 091-2(78)

FILE NAME: /pave/06a044/pa044
 PROJECT LEADER: PTS
 DESIGNED BY: NLL
 IPARM FILE NAME: 06A044.19

PLOT DATE: 8/5/2011
 DRAWN BY: WWG
 CHECKED BY: PTS
 SHEET 19 OF 33

NOT TO SCALE