



MATERIAL ITEM	THICKNESS TOLERANCE
PAVEMENT SURFACE COURSE	± 1/4"
BASE COURSE	± 1/2"
SUBBASE	± 1"
SAND BORROW	± 1"

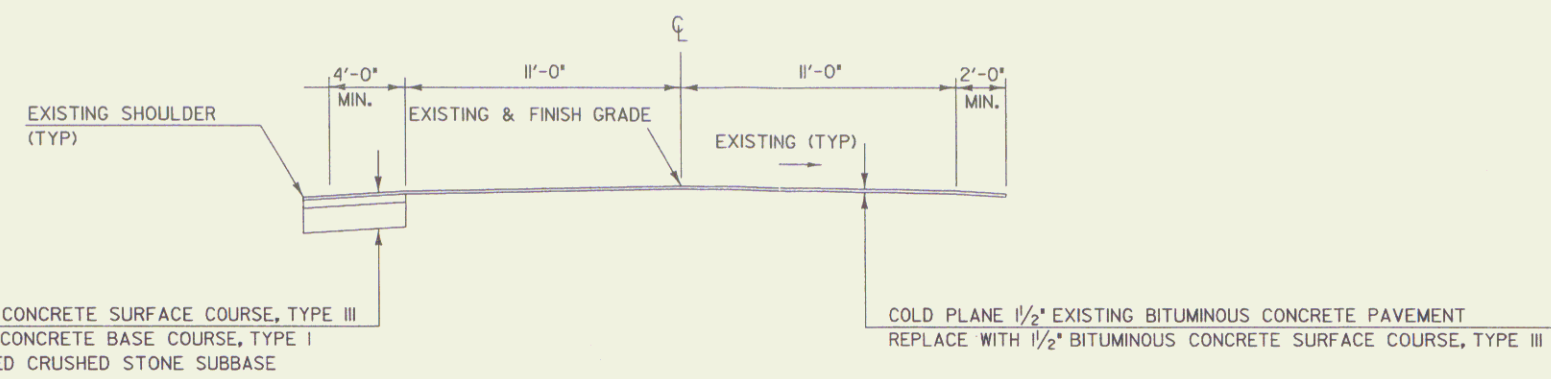

NORMAL SECTIONS
NTS
STA 215+00 TO 217+50

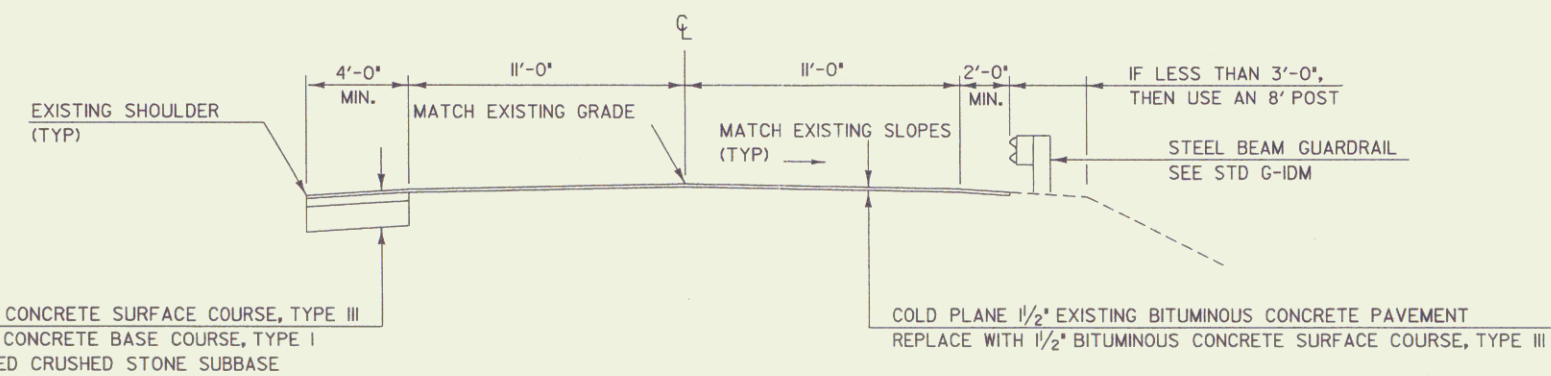

NORMAL SECTIONS
NTS
STA 221+00 TO 223+85

**SEEDING FORMULA
URBAN AREAS**

% WT.	LBS./A.	NAME	PLR %	GERM %
42.5	34.0	CREeping RED FESCUE	98	85
10.0	8.0	PERENNIAL RYE GRASS	95	90
42.5	34.0	KENTUCKY BLUE GRASS	85	85
5.0	4.0	ANNUAL RYE GRASS	95	85
100.00	80.0			

GENERAL NOTES

SEED MIXTURE SHALL NOT HAVE A WEED CONTENT EXCEEDING 0.40% BY WEIGHT AND SHALL BE FREE OF ALL NOXIOUS SEED.
SEEDS TO BE APPLIED PER SEEDING FORMULAS OR AS DIRECTED BY THE ENGINEER.
FERTILIZER, FORMULA 10-20-10, TO BE USED WITH SEED, APPLIED AT THE RATE OF 500 LBS./ACRE. HYPOD SEEDERS MAY USE 10-10-10 FORMULA.
AGRICULTURAL LIMESTONE, TO BE APPLIED AT THE RATE OF 2 TONS/ACRE, OR AS DIRECTED BY THE ENGINEER.
HAY MULCH TO BE PLACED ON EARTH SLOPES AT THE RATE OF 2 TONS/ACRE, OR AS DIRECTED BY THE ENGINEER.
TOPSOIL TO BE USED WITH SEED AS INDICATED ON THE PLANS, OR AS DIRECTED BY THE ENGINEER.
MARKER POSTS TO BE PLACED AS INDICATED OR AS DIRECTED BY THE ENGINEER.
SLOPE ROUNDING: ALL CUT SLOPES TO BE ROUNDED IN ACCORDANCE WITH STANDARD SHEET B-5.
PAY LIMITS OF SAND BORROW, WHEN USED IN CONJUNCTION WITH UNDERDRAIN - SEE STANDARD SHEET D - 2.
TACK COAT, EMULSIFIED ASPHALT IS TO BE APPLIED AT THE RATE OF 0.05 GAL./SY BETWEEN SUCCESSIVE COURSES OF PAVEMENT AS DIRECTED BY THE ENGINEER.

TYPICAL ROADWAY SECTIONS

PROJECT NAME:	WILLIAMSTOWN
PROJECT NUMBER:	BRS 0204 (4)
FILE NAME:	str2/83ell/dellfrm.dgn
PROJECT LEADER:	EVANS-MONGEON
DESIGNED BY:	EVANS-MONGEON
PLOT DATE:	06-JUN-2005
DRAWN BY:	BULLOCK
CHECKED BY:	STANLEY
ROW SHEET:	3 OF 20 SHEETS