

# TYPICAL SECTIONS





3" BITUMINOUS CONCRETE PAVEMENT (1 1/4" TYPE III OVER 1 3/4" TYPE II)  
 5" BASE COURSE BITUMINOUS CONCRETE PAVEMENT (TWO 2 1/2" LIFTS) TYPE I  
 24" SUBBASE OF GRAVEL  
 24" SAND BORROW

SHOULDERS: 1 1/4" BITUMINOUS CONCRETE PAVEMENT

## SEEDING FORMULA - RURAL AREAS

% WT.	LBS./A.	NAME	PUR %	GERM %
3.33	2	CROWN VETCH	97	75
50.00	30	CREeping RED FESCUE	98	85
8.33	5	TIMOTHY	99	85
16.67	10	PERENNIAL RYE GRASS (VAR. PENNFINE)	95	85
8.34	5	ALFALFA (VAR. SARANAC)	99	85
8.33	5	BIRDFOOT TREFLOIL (VAR. EMPIRE)	98	85
5.00	3	HIGHLAND BENT GRASS	92	85
100.00	60			

THE SEED MIXTURE SHALL NOT HAVE A WEED CONTENT EXCEEDING 0.40% BY WEIGHT AND SHALL BE FREE OF ALL NOXIOUS WEED SEED.  
 SEED- TO BE APPLIED PER SEEDING FORMULAS DIRECTED BY THE ENGINEER.  
 FERTILIZER- FORMULA 10-20-10 TO BE USED WITH SEED, APPLIED AT THE RATE OF 500 LBS./ACRE  
 AGRICULTURAL LIMESTONE- TO BE APPLIED AT THE RATE OF 2 TONS/ACRE OR AS DIRECTED BY THE ENGINEER.  
 HAY MULCH- TO BE PLACED ON EARTH SLOPES AT THE RATE OF 2 TONS/ACRE, OR AS DIRECTED BY THE ENGINEER.  
 TOPSOIL- TO BE USED WITH SEED AS INDICATED ON THE PLANS, OR AS DIRECTED BY THE ENGINEER.  
 MARKER POSTS- TO BE PLACED AS DIRECTED BY THE ENGINEER.  
 SLOPE ROUNDING- ALL CUT SLOPES TO BE ROUNDED IN ACCORDANCE WITH STANDARD SHEET B-5.  
 PAY LIMITS OF SAND BORROW WHEN USED IN CONJUNCTION WITH UNDERDRAIN- SEE STANDARD SHEET D-2.

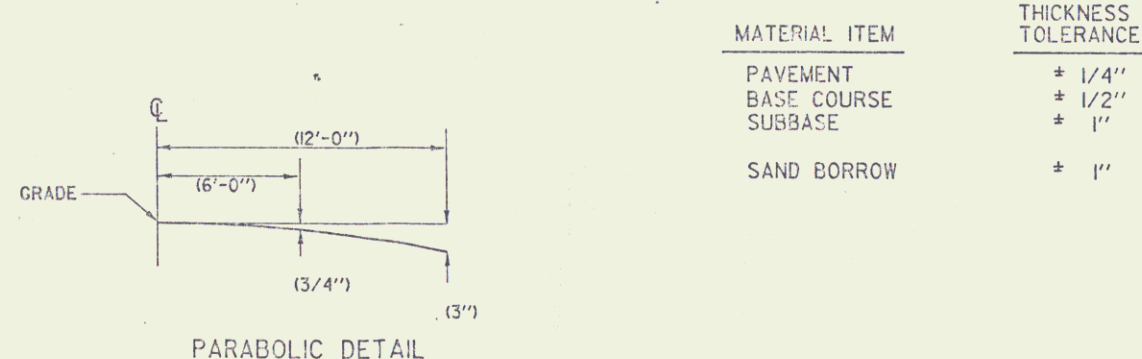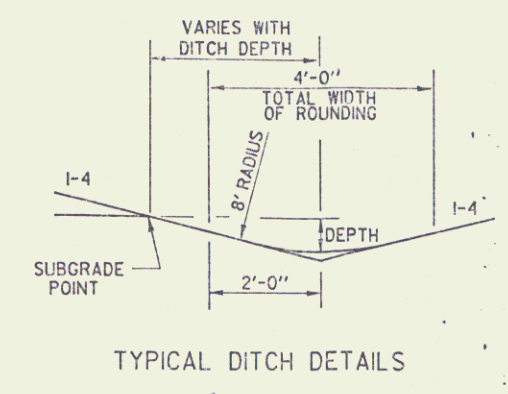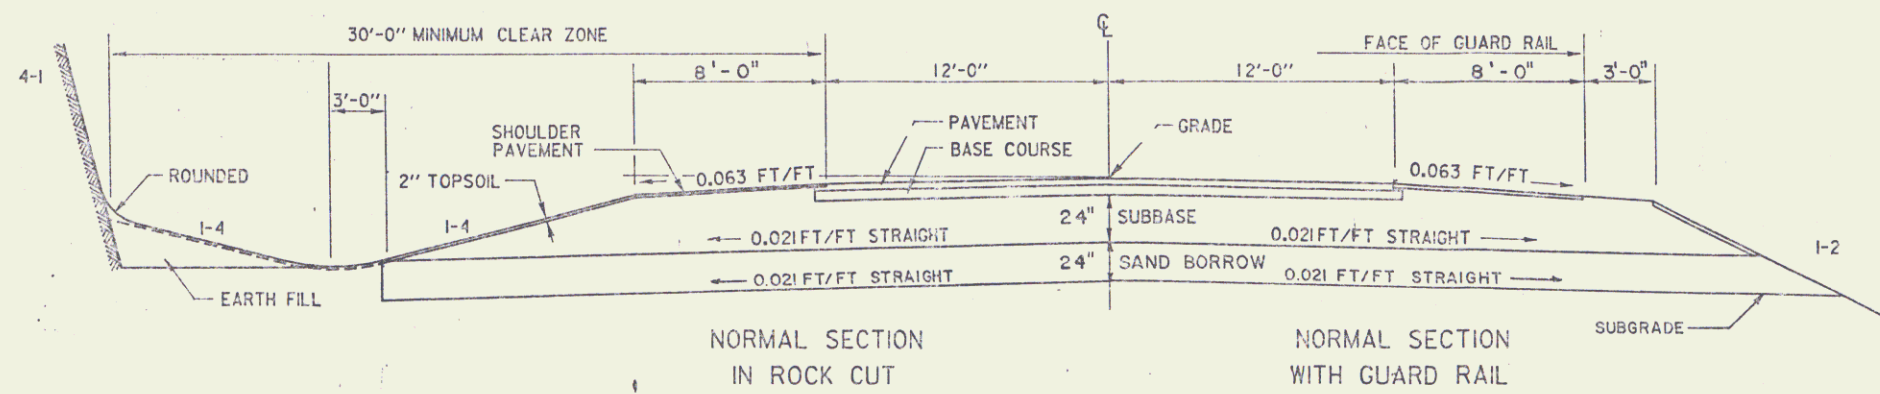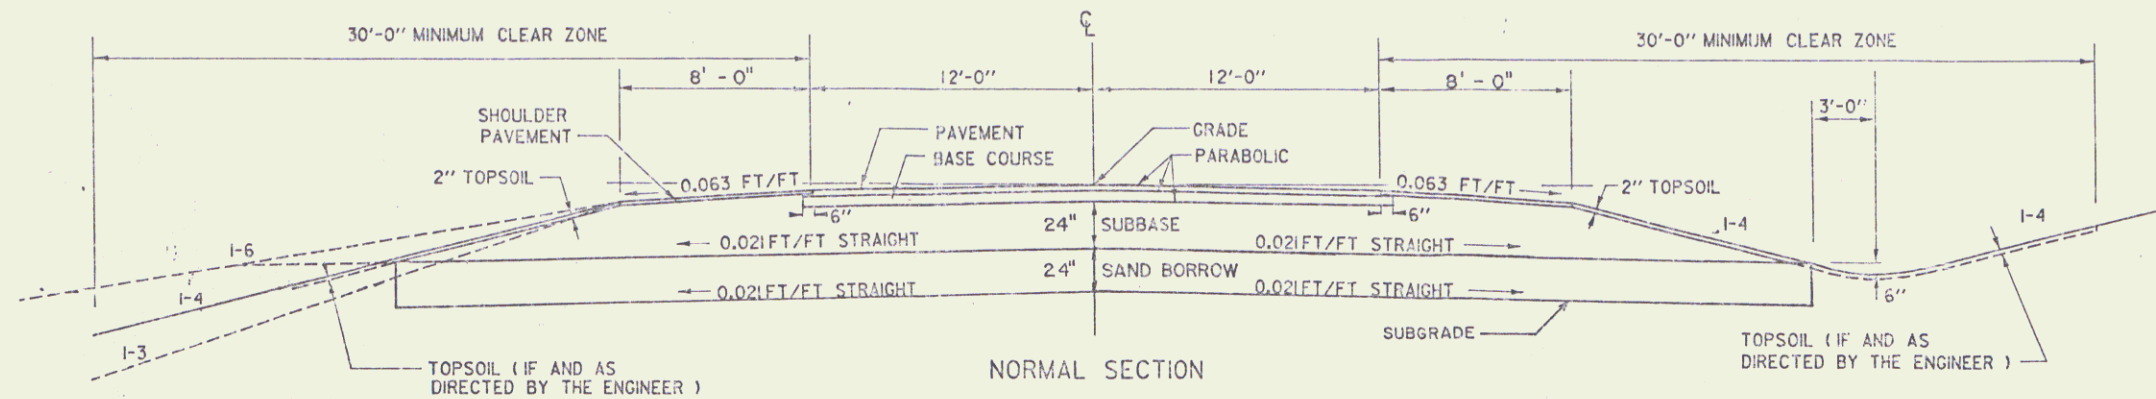

MATERIAL ITEM	THICKNESS TOLERANCE
PAVEMENT	+ 1/4"
BASE COURSE	+ 1/2"
SUBBASE	+ 1"
SAND BORROW	+ 1"

DATUM  
 VERTICAL NGVD 1929  
 HORIZONTAL N. A.

SURVEYED BY NYE DATE 2-35  
 DRAWN BY D. C. WILLEY DATE 6-66  
 TRACED BY DATE  
**STOCKBRIDGE**  
**BRF 022-1(13)**  
 R.O.W. SHEET 2 OF 12