

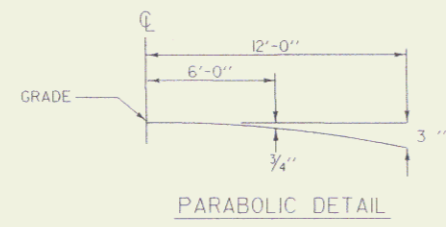
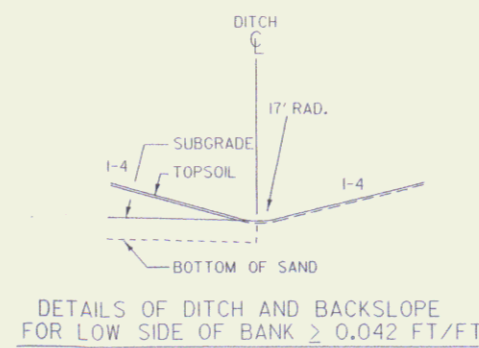
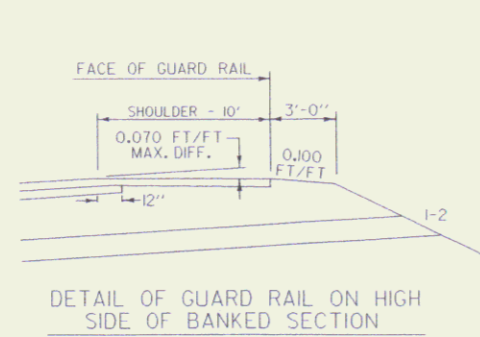
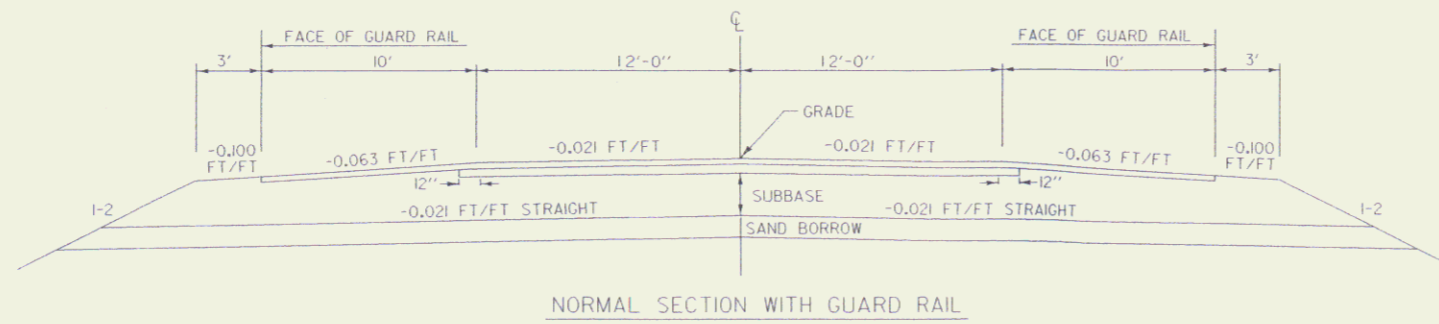


| MATERIAL ITEM          | THICKNESS TOLERANCE |
|------------------------|---------------------|
| PAVEMENT (TOTAL DEPTH) | ± 1/4"              |
| SUBBASE                | ± 1"                |
| SAND BORROW            | ± 1"                |

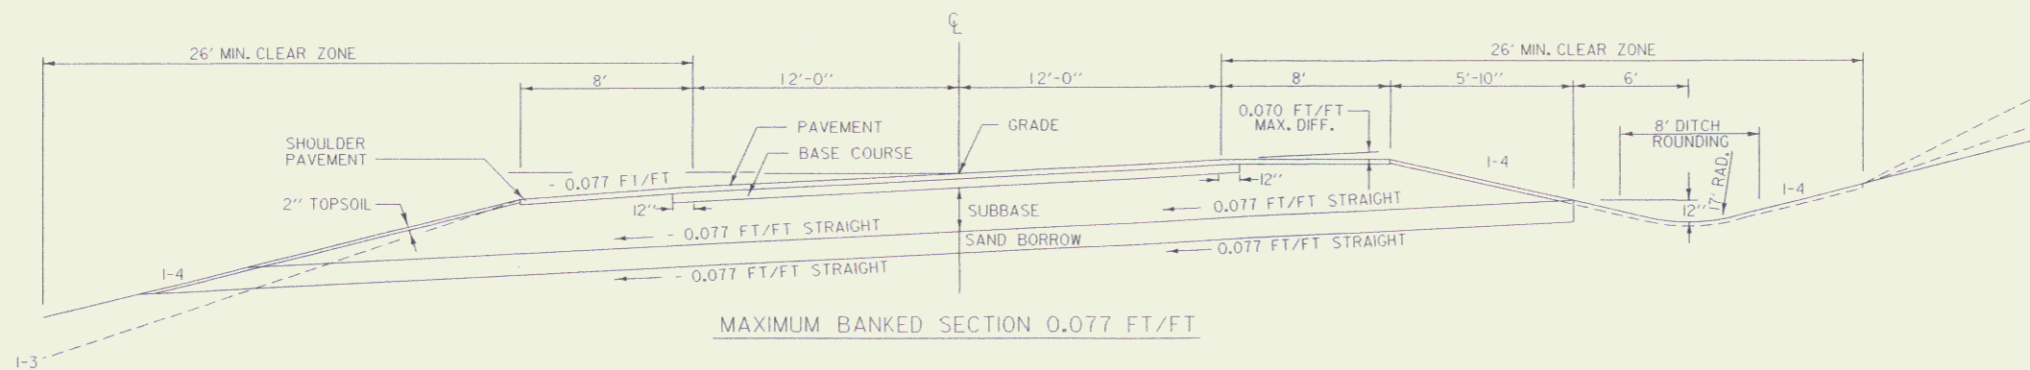

## TYPICAL SECTIONS

1/2" BITUMINOUS CONCRETE PAVEMENT, TYPE III  
 2" BITUMINOUS CONCRETE PAVEMENT, TYPE II  
 5" BITUMINOUS CONCRETE PAVEMENT, TYPE I (TWO LIFTS OF 2 1/2")  
 2" SUBBASE OF CRUSHED GRAVEL (COARSE GRADED)  
 15" SAND BORROW  
 SHOULDERS 3 1/2" BITUMINOUS CONCRETE PAVEMENT (1 1/2" TYPE III OVER 2" TYPE II)

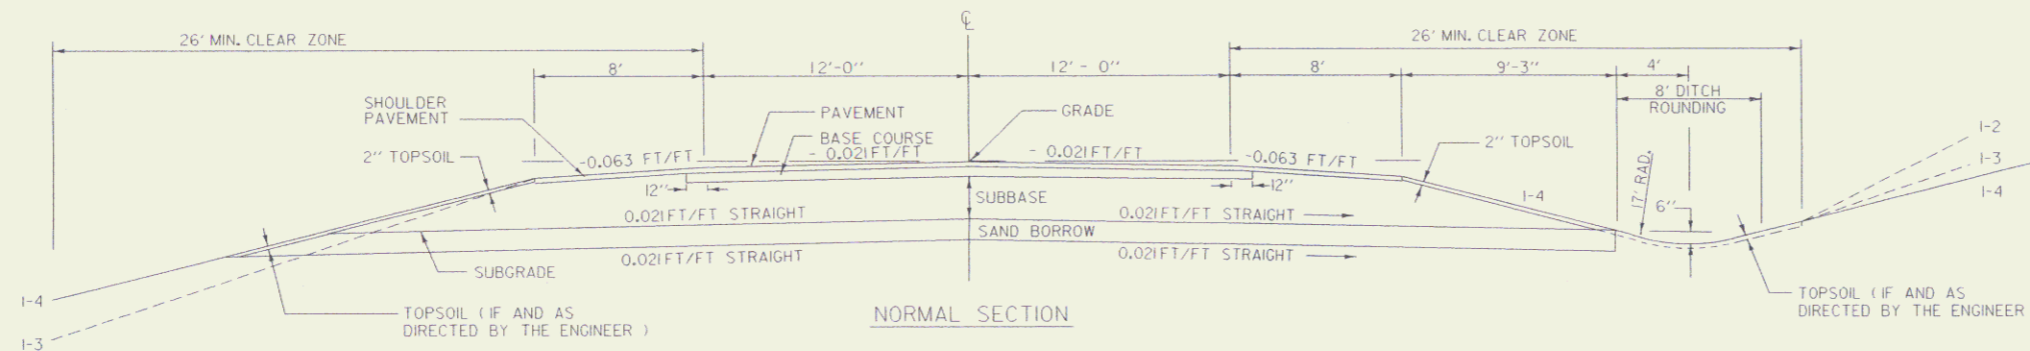

### SEEDING FORMULA URBAN AREAS

| % WT.  | LBS./A. | NAME                | PUR % | GERM % |
|--------|---------|---------------------|-------|--------|
| 42.5   | 34.0    | CREeping RED FESCUE | 98    | 85     |
| 10.0   | 8.0     | PERENNIAL RYE GRASS | 95    | 90     |
| 42.5   | 34.0    | KENTUCKY BLUE GRASS | 85    | 85     |
| 5.0    | 4.0     | ANNUAL RYE GRASS    | 95    | 85     |
| 100.00 | 80.0    |                     |       |        |

### SEEDING FORMULA RURAL AREAS

| % WT. | LBS./A. | NAME                 | PUR % | GERM % |
|-------|---------|----------------------|-------|--------|
| 37.5  | 22.5    | CREeping RED FESCUE  | 98    | 85     |
| 37.5  | 22.5    | TALL FESCUE          | 95    | 90     |
| 5.0   | 3.0     | RED TOP              | 95    | 90     |
| 15.0  | 3.0     | BIRD'S-FOOT TREFLOIL | 98    | 85     |
| 5.0   | 3.0     | ANNUAL RYEGRASS      | 95    | 85     |
| 100.0 | 60.0    |                      |       |        |

### GENERAL NOTES

SEED MIXTURE: SHALL NOT HAVE A WEED CONTENT EXCEEDING 0.40% BY WEIGHT AND SHALL BE FREE OF ALL NOXIOUS SEED.  
 SEED: TO BE APPLIED PER SEEDING FORMULAS OR AS DIRECTED BY THE ENGINEER.  
 FERTILIZER: FORMULA 10-20-10, TO BE USED WITH SEED, APPLIED AT THE RATE OF 500 LBS./ACRE. (HYDRO SEEDERS MAY USE 19-19-19 FORMULA).  
 AGRICULTURAL LIMESTONE: TO BE APPLIED AT THE RATE OF 2 TONS/ACRE, OR AS DIRECTED BY THE ENGINEER.  
 HAY MULCH: TO BE PLACED ON EARTH SLOPES AT THE RATE OF 2 TONS/ACRE, OR AS DIRECTED BY THE ENGINEER.  
 TOPSOIL: TO BE USED WITH SEED AS INDICATED ON THE PLANS, OR AS DIRECTED BY THE ENGINEER.  
 MARKER POSTS: TO BE PLACED AS INDICATED OR AS DIRECTED BY THE ENGINEER.  
 SLOPE ROUNDING: ALL CUT SLOPES TO BE ROUNDED IN ACCORDANCE WITH STANDARD SHEET B-5.  
 PAY LIMITS OF SAND BORROW: WHEN USED IN CONJUNCTION WITH UNDERDRAIN - SEE STANDARD SHEET D - 2.  
 TACK COAT: EMULSIFIED ASPHALT IS TO BE APPLIED AT THE RATE OF 0.015 GAL/SY BETWEEN SUCCESSIVE COURSES OF PAVEMENT AS DIRECTED BY THE ENGINEER.

MAR 27 2008

### TYPICAL SHEET

|                 |                            |      |            |
|-----------------|----------------------------|------|------------|
| SURVEYED BY     | MOREAU                     | DATE | 12/88      |
| DRAWN BY        | KJR                        | DATE | 4/92       |
| SQUAD LEADER    | NYQUIST                    |      |            |
| DESIGN FILE NO. | /prop/840039/re0392frm.dgn |      |            |
| FILE            | re039tyd.i                 | DATE | 6-JUN-1997 |
| PROJ. NAME      | WOODFORD                   |      |            |
| PROJ. NO.       | BHF 010-1 (29)             |      |            |
| R. O. W.        | SHEET 2 OF 11 SHEETS       |      |            |

N.T.S.