


TYPICAL SECTIONS

- 3" BITUMINOUS CONCRETE PAVEMENT (TYPE II 1 1/4" LIFT OVER TYPE II 1 3/4" LIFT)
- 5" BITUMINOUS CONCRETE PAVEMENT (TYPE I)
- 24" SUBBASE OF GRAVEL
- SHOULDER 1 1/4" BITUMINOUS CONCRETE PAVEMENT TYPE III
- 18" SAND BORROW

NOTE: ALL FROST SUSCEPTIBLE MATERIAL WITHIN 50" (DESIGN FROST DEPTH) OF FINISH GRADE SHALL BE REMOVED AND REPLACED WITH FROST FREE MATERIAL.

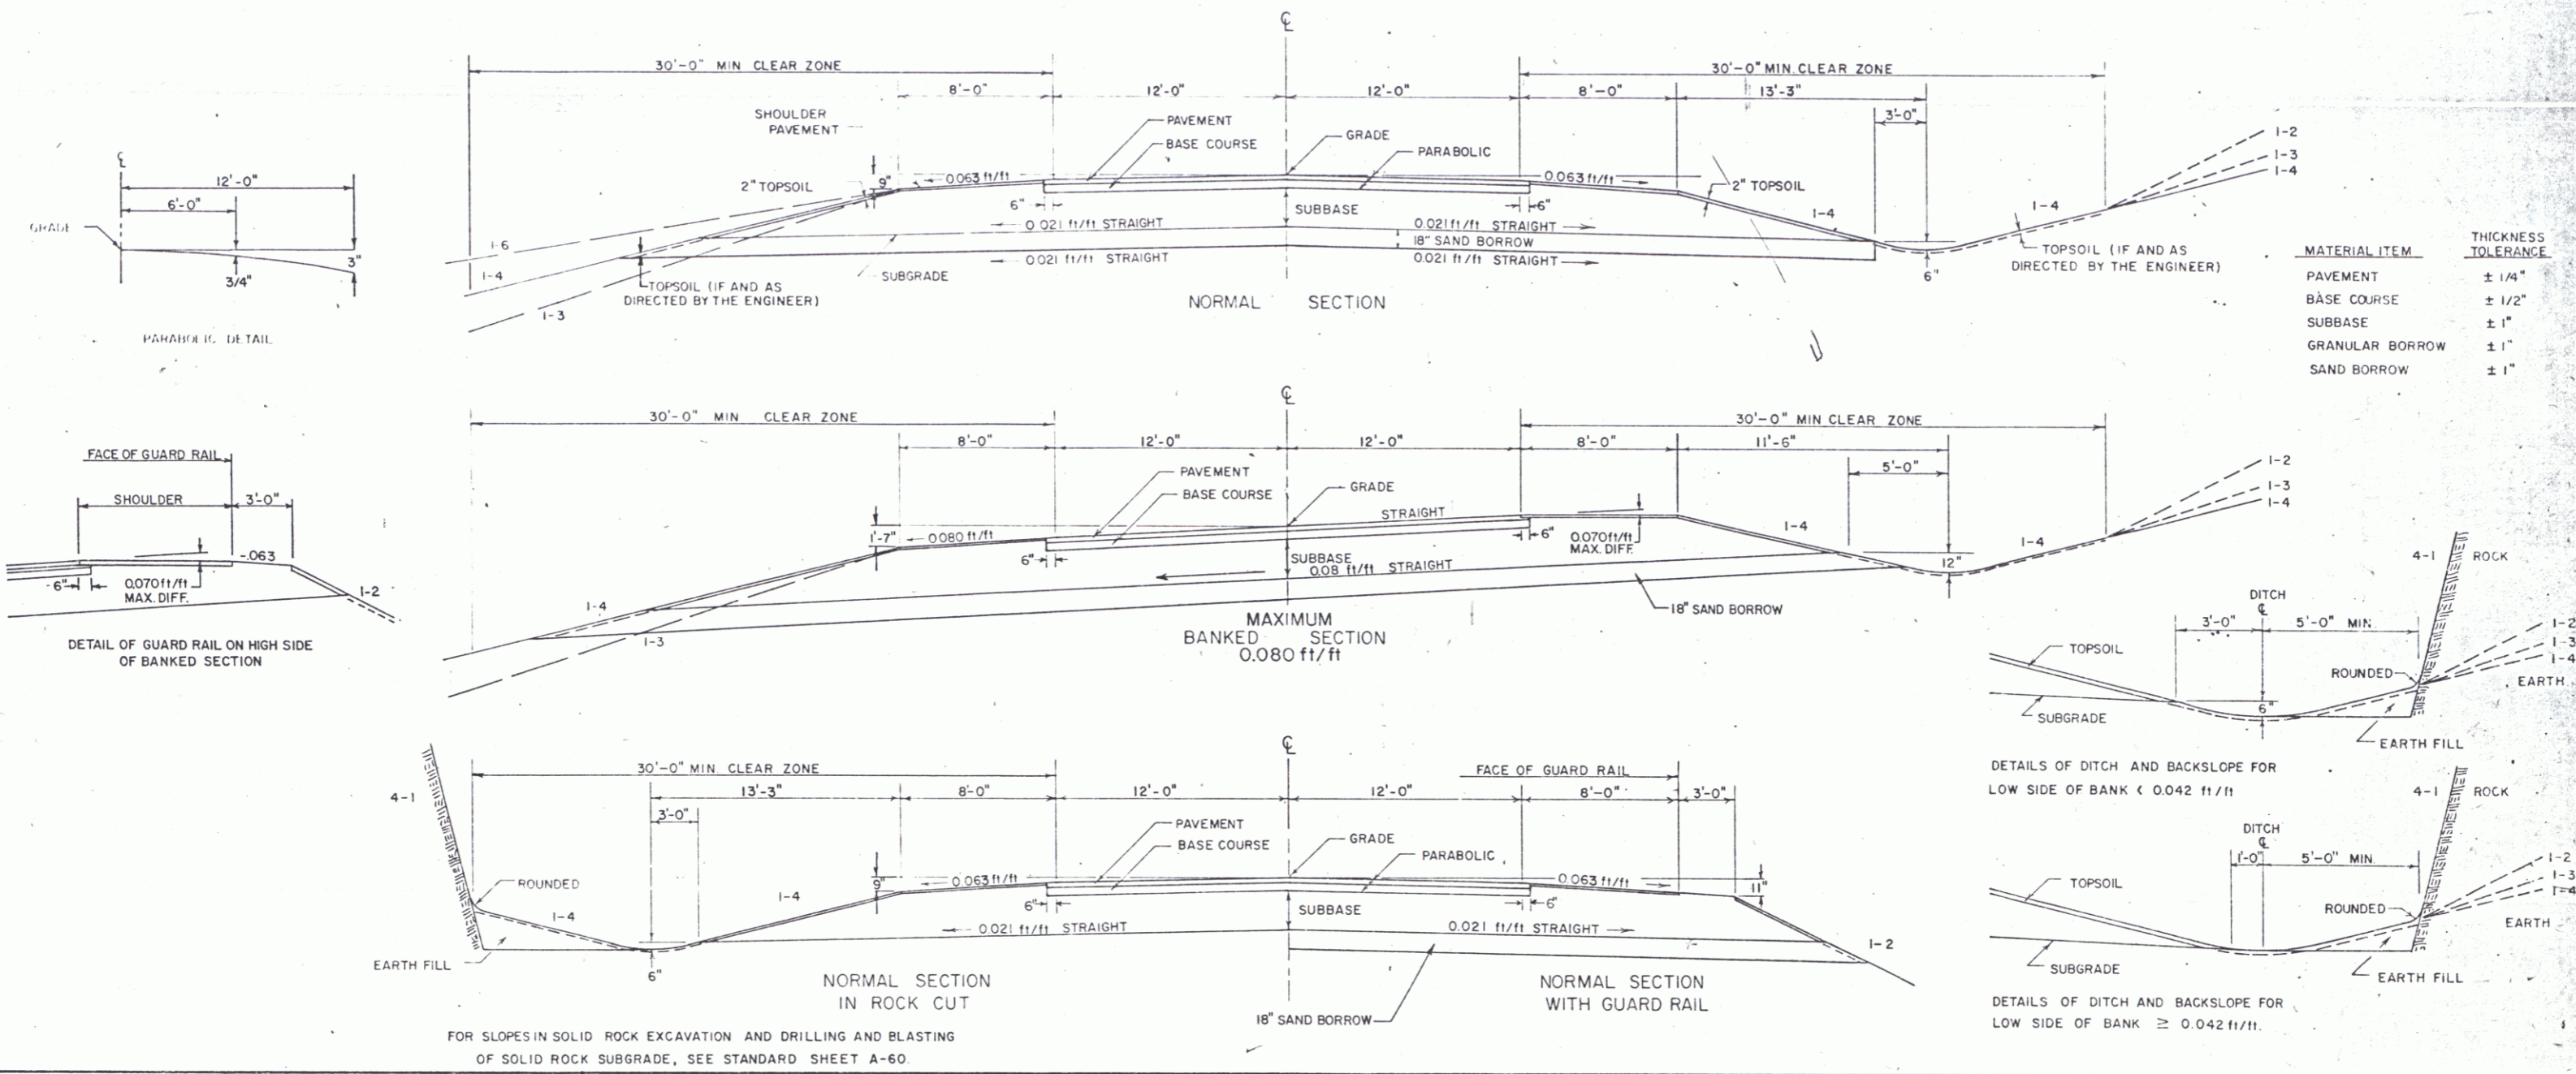

MATERIAL ITEM	THICKNESS TOLERANCE
PAVEMENT	± 1/4"
BASE COURSE	± 1/2"
SUBBASE	± 1"
GRANULAR BORROW	± 1"
SAND BORROW	± 1"

RURAL SEEDING FORMULA			
% WT.	LBS./A.	PUR %	GERM %
3.33	2	97	75
50.00	30	98	85
8.33	5	99	85
16.67	10		
8.34	5	95	65
8.33	5	99	85
5.00	3	98	85
100.00	40	72	85

GENERAL NOTES

- SEED - To be applied per Seeding Formula as directed by the Engineer.
- FERTILIZER - Formula 10-20-10 to be used with seed, applied at the rate of 500 lbs/Acre.
- AGRICULTURAL LIMESTONE - To be applied at the rate of 2 tons/Acre or as directed by the Engineer.
- HAY MULCH - To be placed on earth slopes at the rate of 2 tons/Acre.
- TOPSOIL - To be used with seed as indicated on the plans or as directed by the Engineer.
- MARKER POSTS - (Wood or Steel, as specified) - To be placed as directed by the Engineer.
- SLOPE ROUNDING - All cut slopes to be rounded in accordance with Standard Sheet B-5.
- PAY LIMITS OF SAND BORROW WHEN USED IN CONJUNCTION WITH UNDERDRAIN - See Standard Sheet D-2.
- FOR METHOD OF CONSTRUCTING EMBANKMENT ON AN EARTH SLOPE - See Standard Sheet B-5.

MAY 5 1992

TYPICAL SECTIONS FOR

PROJECT SHELTON

NO. HES 034-1(17)

SHEET 2 OF 6 SHEETS