
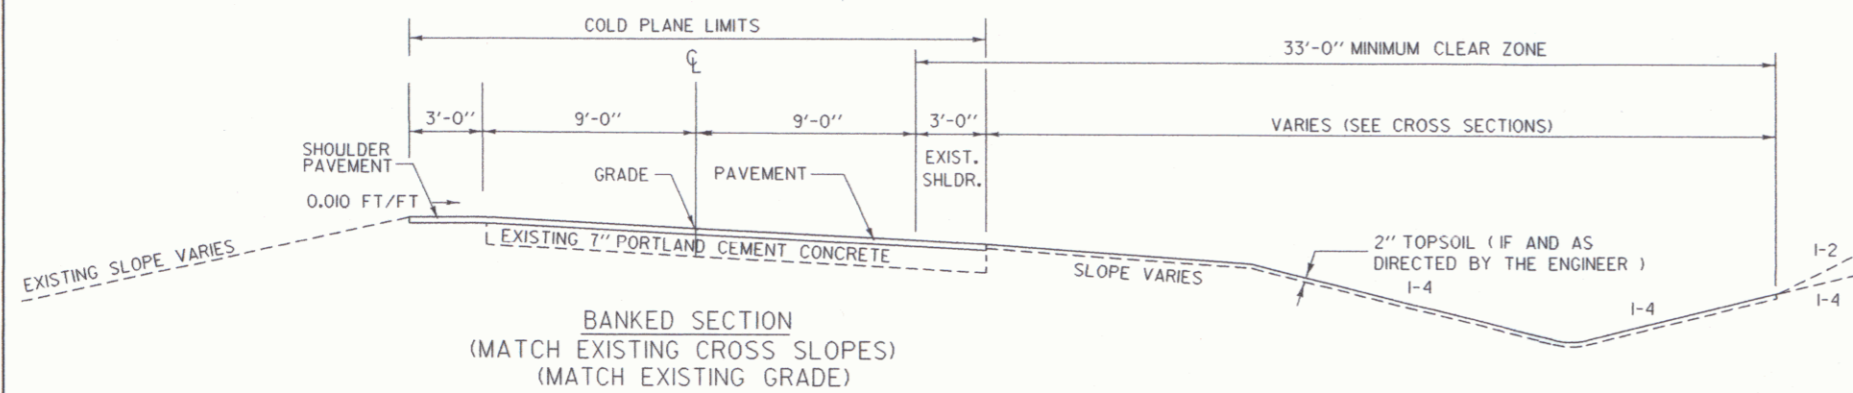



MATERIAL ITEM	THICKNESS TOLERANCE
PAVEMENT	* 1/4"

## TYPICAL SECTIONS


1/2" BITUMINOUS CONCRETE PAVEMENT, TYPE III - PG 64-28 (TRAVEL LANES AND SHOULDERS)  
COLD PLANE 1/2" (EXISTING TRAVEL LANES AND SHOULDERS)

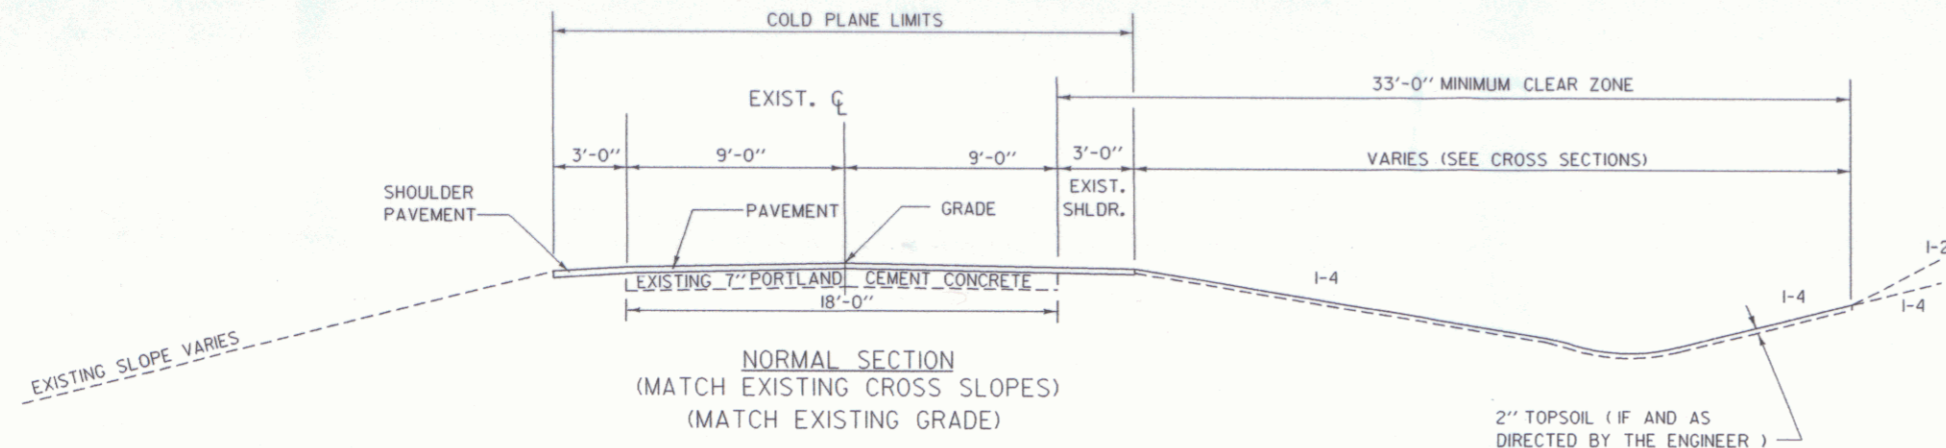

\* IN BANKED SECTIONS THE EXISTING PORTLAND CEMENT CONCRETE SLAB IS 2' RATHER THAN THE 18' WIDTH FOR THE NORMAL SECTION, PER RECORD PLANS

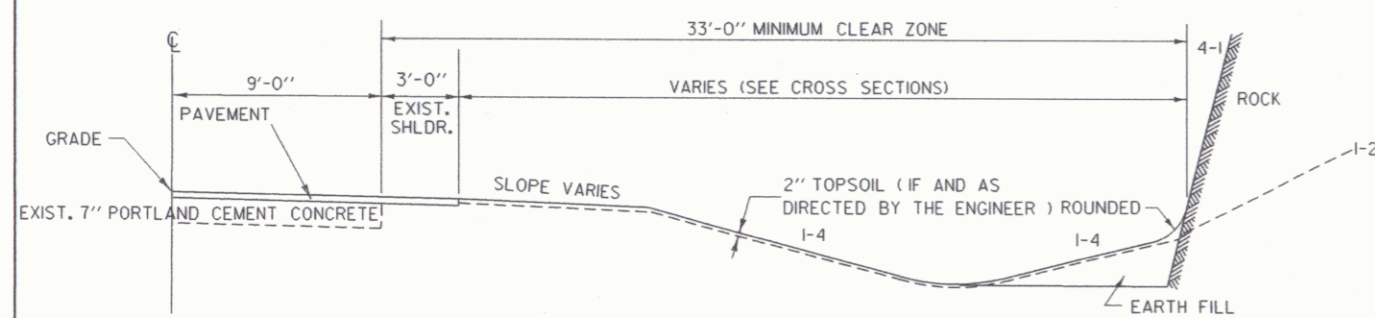




FOR SLOPES IN SOLID ROCK EXCAVATION SEE STANDARD SHEET A-60.

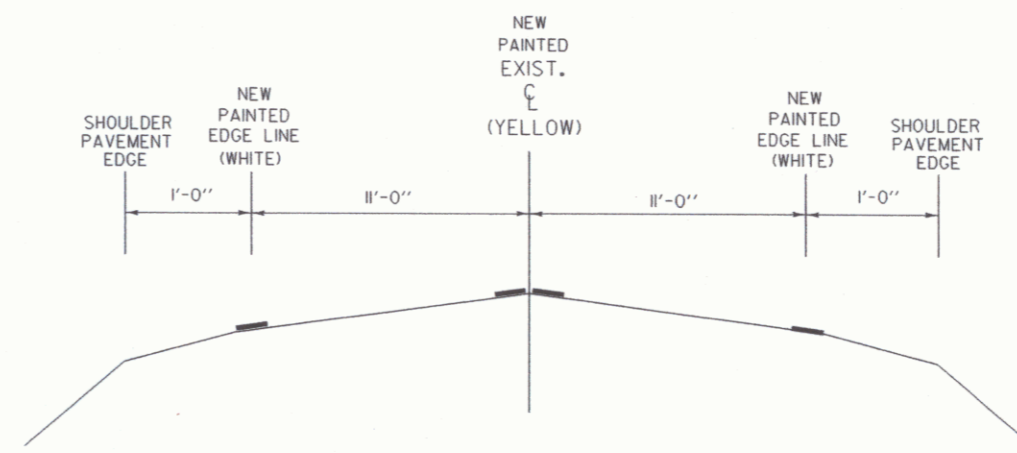

% WT.	LBS./A.	NAME	PUR %	GERM %
42.5	34.0	CREeping RED FESCUE	98	85
10.0	8.0	PERENNIAL RYE GRASS	95	90
42.5	34.0	KENTUCKY BLUE GRASS	85	85
5.0	4.0	ANNUAL RYE GRASS	95	85
100.00	80.0			

% WT.	LBS./A.	NAME	PUR %	GERM %
37.5	22.5	CREeping RED FESCUE	98	85
37.5	22.5	TALL FESCUE	95	90
5.0	3.0	RED TOP	95	90
15.0	9.0	BIRDSFOOT TREFLOIL	95	85
5.0	3.0	ANNUAL RYEGRASS	95	85
100.0	60.0			

THE SEED MIXTURE SHALL NOT HAVE A WEED CONTENT EXCEEDING 0.40% BY WEIGHT AND SHALL BE FREE OF ALL NOXIOUS WEED SEED.  
SEED- TO BE APPLIED PER SEEDING FORMULA DIRECTED BY THE ENGINEER.  
FERTILIZER- FORMULA 19-19-19 TO BE USED WITH SEED, APPLIED AT THE RATE OF 500 LBS./ACRE. OR AS DIRECTED BY THE ENGINEER.  
AGRICULTURAL LIMESTONE- TO BE APPLIED AT THE RATE OF 2 TONS/ACRE OR AS DIRECTED BY THE ENGINEER.  
HAY MULCH- TO BE PLACED ON EARTH SLOPES AT THE RATE OF 2 TONS/ACRE, OR AS DIRECTED BY THE ENGINEER.  
TOPSOIL- TO BE USED WITH SEED AS INDICATED ON THE PLANS, OR AS DIRECTED BY THE ENGINEER.  
MARKER POSTS- TO BE PLACED AS DIRECTED BY THE ENGINEER.  
SLOPE ROUNDING- ALL CUT SLOPES TO BE ROUNDED IN ACCORDANCE WITH STANDARD SHEET B-5.  
TACK COAT: EMULSIFIED ASPHALT IS TO BE APPLIED AT THE RATE OF 0.015 GAL/SY BETWEEN SUCCESSIVE COURSES OF PAVEMENT AS DIRECTED BY THE ENGINEER.

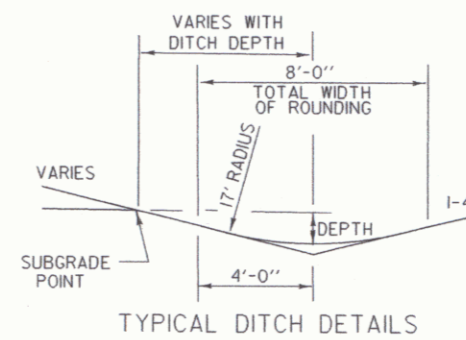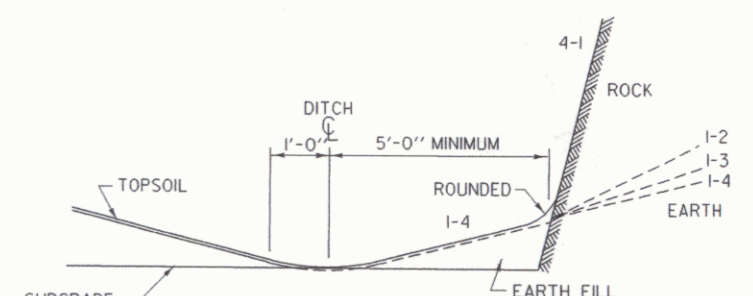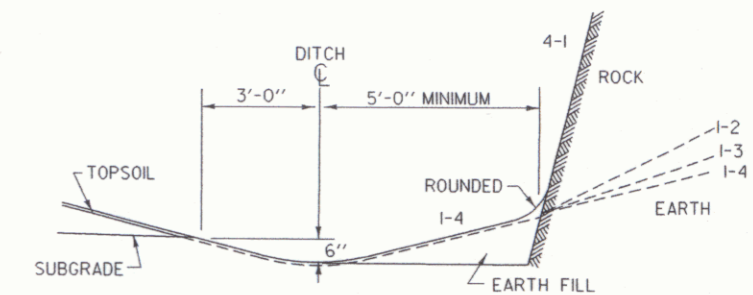

FEB 21 2001

NOT TO SCALE		DB076TYP
		24-MAR-1999
SURVEYED BY	ORVIS	DATE 9/97
DRAWN BY	SODB	DATE 9/97
SQUAD LEADER	DELLA SANTA	
PROJ. NAME	LUDLOW	
PROJ. NO.	NH 025-1(38)S	
R. O. W. SHEET 2 OF 8 SHEETS		