


TYPICAL SECTIONS

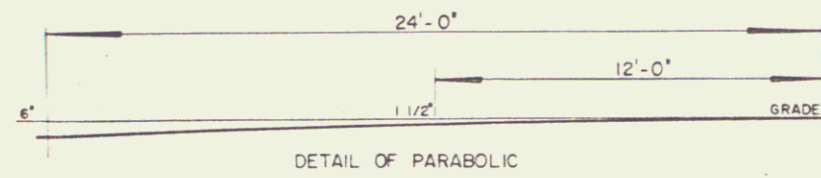

2 1/2" BITUMINOUS CONCRETE PAVEMENT, ITEM 361 MOD. (± 1/4" FOR TOTAL THICKNESS) 1 1/4" WEARING COURSE TYPE III
 3" CRUSHED GRAVEL OR CRUSHED STONE PLANT MIXED BASE COURSE, ITEM 213 (± 1/2")
 24" SUB-BASE OF CRUSHED ROCK, ITEM 204 (± 1")
 3" CRUSHED STONE SHOULDERS, ITEM 303 WITH TACK COAT TYPE III, ITEM 315 MOD.
 SUB-BASE OF GRAVEL, ITEM 201 MOD.
 24" SUB-BASE OF SAND, ITEM 202 (± 1") IN CUT] TO BE PLACED AS NOTED ON THE PLANS
 12" GRANULAR BORROW, ITEM 105 (± 1") IN FILL] OR AS DIRECTED BY THE ENGINEER.
 PERMISSIBLE TOLERANCES IN PARENTHESES
 APPLY TO THICKNESS ONLY.


GENERAL NOTES

FOR ROUNDING OF SLOPES, SEE STANDARD SHEET B-5
 STEEL MARKER POSTS, ITEM 547-D TO BE PLACED AS DIRECTED BY THE ENGINEER
 MULCH, ITEM 622, TO BE PLACED ON ALL EARTH SLOPES AT THE RATE OF 2 TONS PER ACRE.

THE FERTILIZER, ITEM 615, SHALL BE MIXED AS FOLLOWS:

SEEDING, ITEM 611	%	LBS/ACRE	NAME	PURITY %	GERM %
	33.33	20	CREeping RED FESCUE	97	82
	10.00	6	TALL FESCUE	95	80
	16.67	10	KENTUCKY BLUE GRASS	85	75
	8.33	5	RED TOP	92	90
	16.67	10	DOMESTIC RYE GRASS	98	90
	8.33	5	BIRDFOOT TREFLOIL (EMPIRE)	99	80
	0.42	1/4	WEED SEED		
	6.25	3.75	INERT MATERIAL		
100.00		60	LBS PER ACRE		

50 LBS OF WINTER RYE PER ACRE TO BE USED IN ADDITION TO THE ABOVE SEEDING FORMULA IF DIRECTED BY THE ENGINEER.

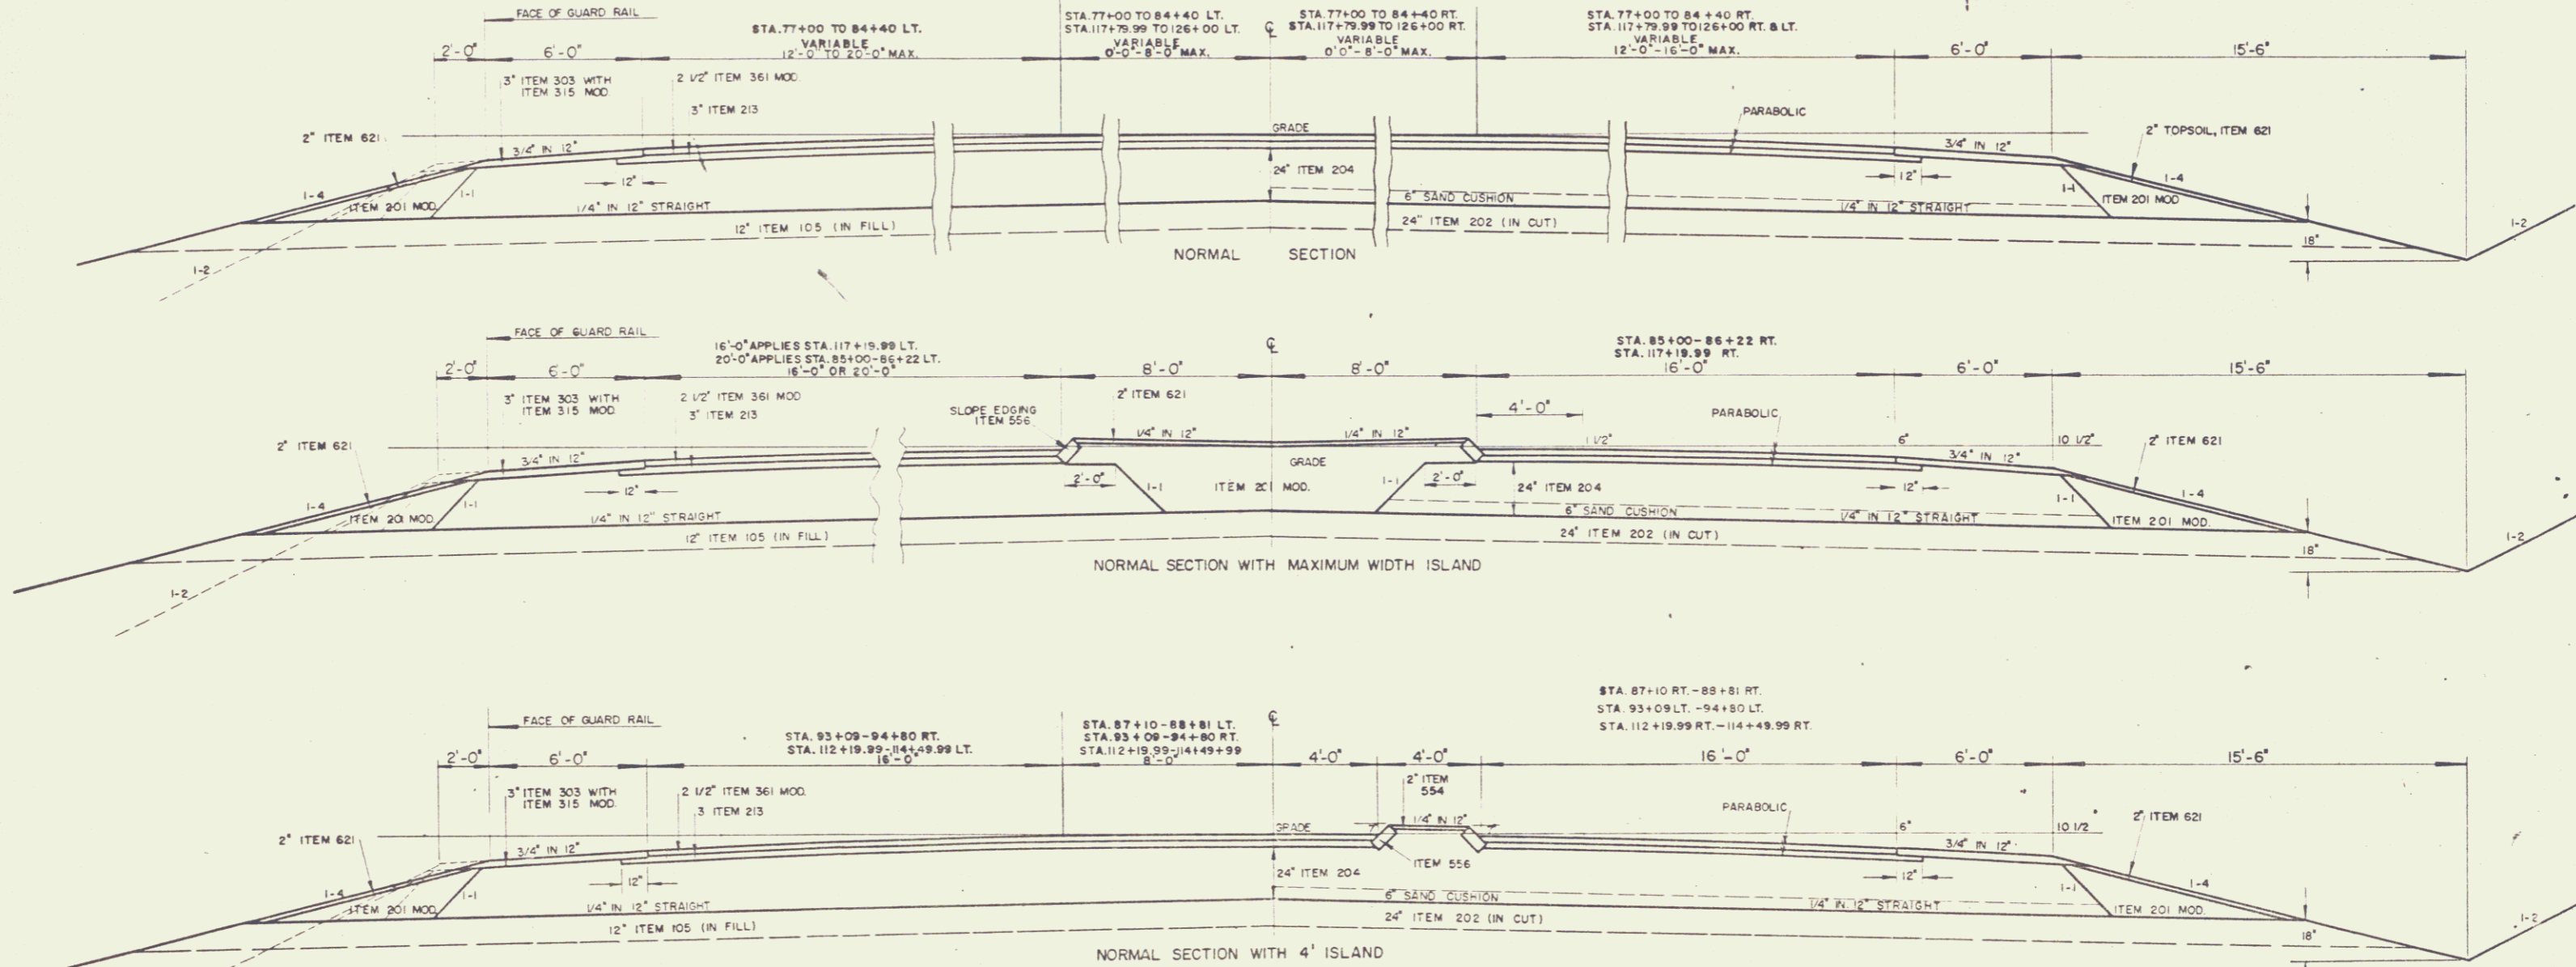

GEORGIA U.S. ROUTE 7
 SURVEYED BY: R.G. DATE: 5/66
 DRAWN BY: R.G. DATE: 5/66
 TRACED BY: A.J.A. DATE: 5/66
 PROJ. BP NO. 019-5-6676
 SHEET 3 OF 3
 0-7