


CABLE RAIL REQUIRED
 Lt. Sta. 1+88 To Sta. 2+04 16 in. ft.
 Rt. Sta. 1+88 To Sta. 2+04 16 " "
 Allowance for Anchors 80 " "
 Total 112 " "

INDEX OF SHEETS
 Sheet No 1 Plan and Profile
 " 2 STD. SLB 20 CR (10'-0" Span - Square)
 " 3 STD. SLAG No. 50 (H=5'-0") (Wings 45°)
 " 4 Series S No 22 - Standard Structures
 " 5 Cross Sections

CURVE #2
 A = 1'-56" LT.
 D = 0'-30"
 L = 306.7'
 T = 193.4'
 E = 1.6'

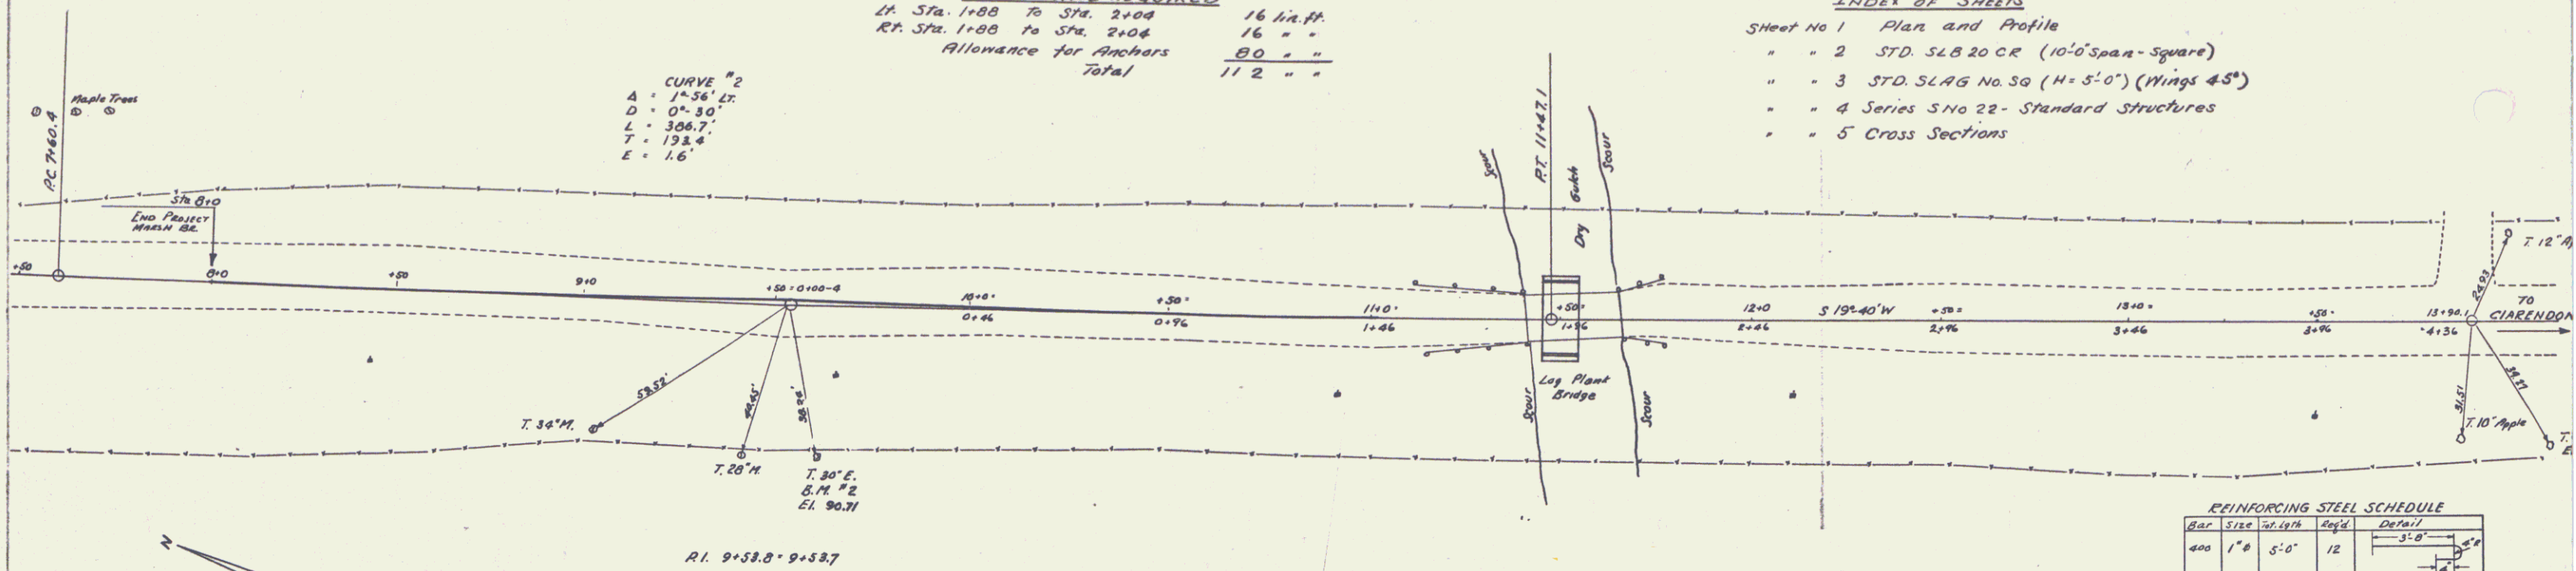

RI. 9+58.8+9+58.7

SUMMARY OF QUANTITIES

Concrete Class "A"	13 cu yds.
Concrete Class "C"	58 cu yds.
Reinf. Steel	1900 lbs.
Struct. Excav.	50 cu yds.

REINFORCING STEEL SCHEDULE

BAR	SIZE	NO. PER FT.	REQ'D.	DETAIL
400	1"Ø	5'-0"	12	
402	3/8"	12'-0"	8	
404	3/8"	2'-0"	28	
408	3/8"	13'-6"	46	
410	1/2"	22'-9"	13	
413	3/8"	6'-3"	10	
414	3/8"	6'-0"	40	
415	3/8"	4'-6"	20	

B.M. #2 ELEVATION 90.71 24" DIA. 40' RR STA. 9+61-9+51.57

