



NOTES


1. MANUFACTURER'S SPECIFICATIONS FOR PLATE CONNECTIONS VARY UPON APPLICATION AND CGMPPA SIZE. (BOTTOM PLATES FOR CGMPPA VARY IN WIDTH BY THE FACTOR $N=9.25/32'$, I. E. $9N = 91.1/8'$). ATTENTION SHOULD BE PAID BY THE CONTRACTOR IN BAFFLE ASSEMBLY, SUCH THAT THE PLACEMENT OF THE NOTCH IS SUFFICIENT ENOUGH TO PREVENT THE BAFFLE FROM RESTING ON THE PLATE CONNECTION BOLTS.
2. CGMPPA BOTTOM PLATES ARE AVAILABLE IN STANDARD 10 AND 12 FOOT LENGTHS. THE SPACING, AS SUGGESTED, REQUIRES A 10 FOOT NOMINAL LENGTH OF PLATE IN ORDER TO OFFSET CGMPPA BOTTOM PLATE AND BAFFLE PLATE CONNECTIONS. IF FOR CONSTRUCTION PURPOSES THE PLATE LENGTHS NEED BE CHANGED, PLACEMENT OF THE BAFFLES WILL BE APPROVED BY THE V.A.O.T. PRIOR TO CGMPPA ASSEMBLY.

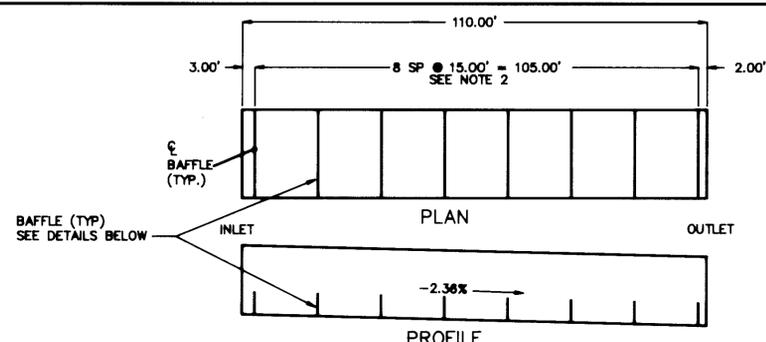


KING BROOK
REV. STA. 114+00
BAFFLE LOCATIONS
N.T.S.

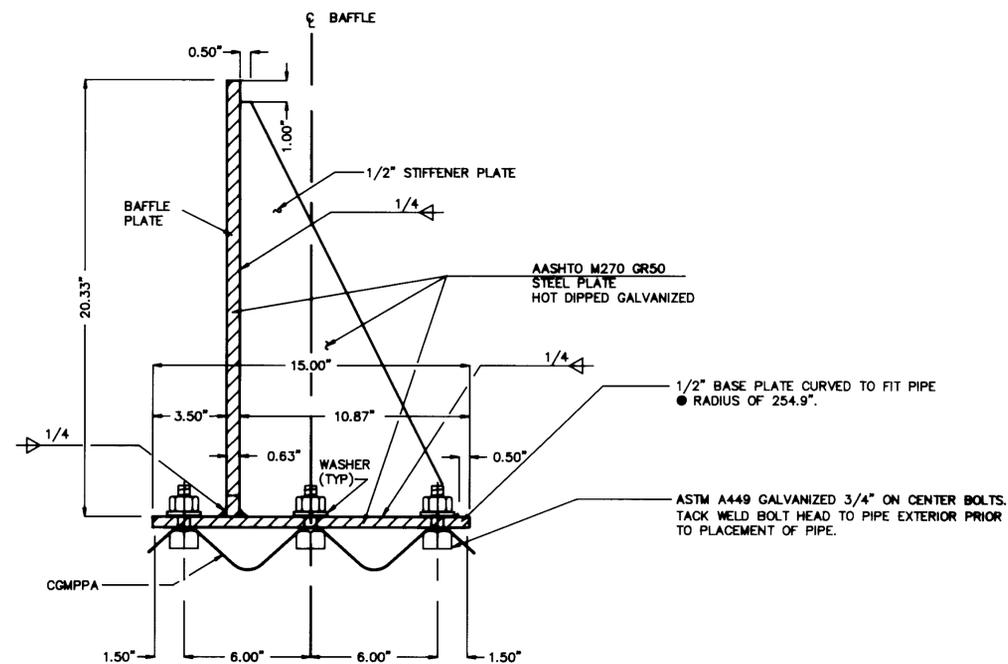


STIFFENER PLATE AND BAFFLE CONNECTION
DETAIL
N.T.S.

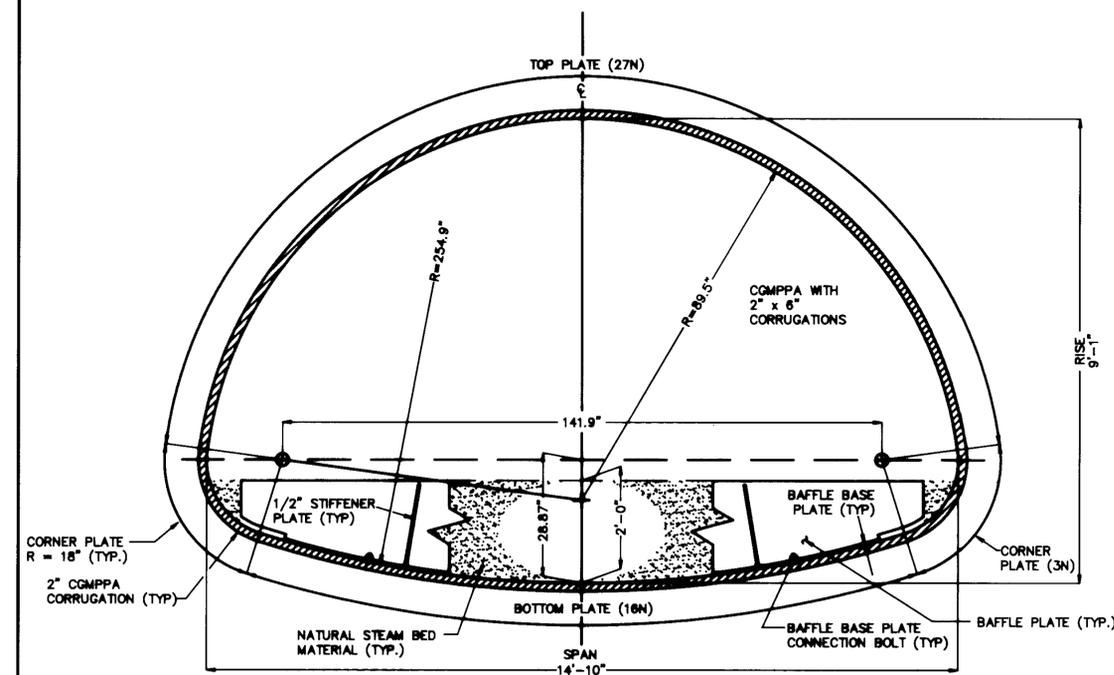

BAFFLE DETAIL
N.T.S.

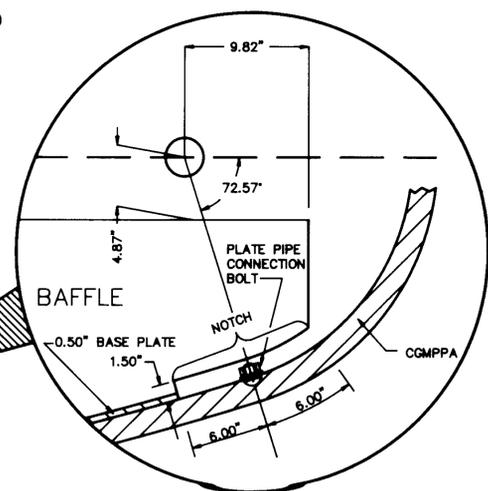

BAFFLE NOTCH
CGMPPA PLATE
CONNECTION
N.T.S.

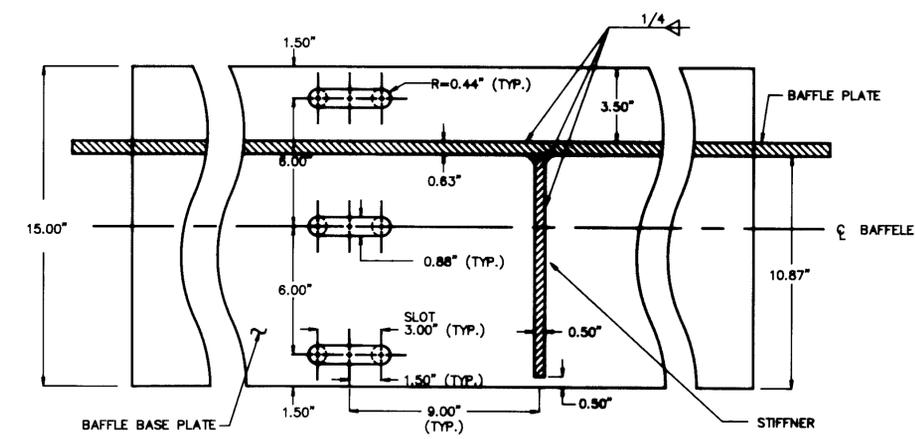

BAFFLE BASE PLATE SLOT
DETAIL
N.T.S.

| | |
|---------------------------|--------------|
| KING BROOK-BR-100 | |
| VT. SURVEY | DATE 3/87 |
| SURVEYED BY CONSULTANTS | DATE 11/90 |
| DRAWN BY BRYANT ASSOC. | DATE 11/90 |
| TRACED BY SMD | DATE 11/90 |
| U.S. ROUTE 2 - MARSHFIELD | |
| PROJ. PREFIX NO. | PROJ.I.D.NO. |
| SHEET 392 OF 352 | |