

THICKNESS TOLERANCES

PAVEMENT (TOTAL DEPTH) = + 1/4"
 SUBBASE = + 1"
 SAND = + 1"






TYPICAL SECTIONS

SIDELINE - VT. RTE. 105 WEST





ALL DRAWINGS NOT TO SCALE

1/2" BITUMINOUS CONCRETE PAVEMENT (TYPE III)
 2" BITUMINOUS CONCRETE PAVEMENT (TYPE II)
 4 1/2" BITUMINOUS CONCRETE PAVEMENT (TYPE I)
 24" SUBBASE OF CRUSHED GRAVEL (COARSE GRADED)
 18" SAND BORROW

NOTE: ALL BITUMINOUS CONCRETE PAVEMENT TO BE PG 58-28

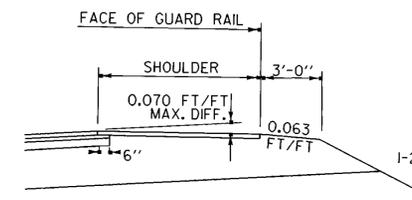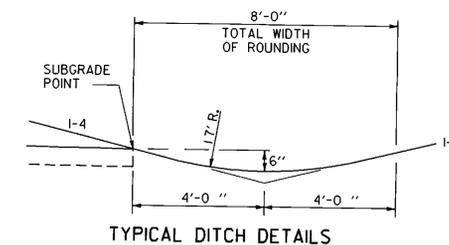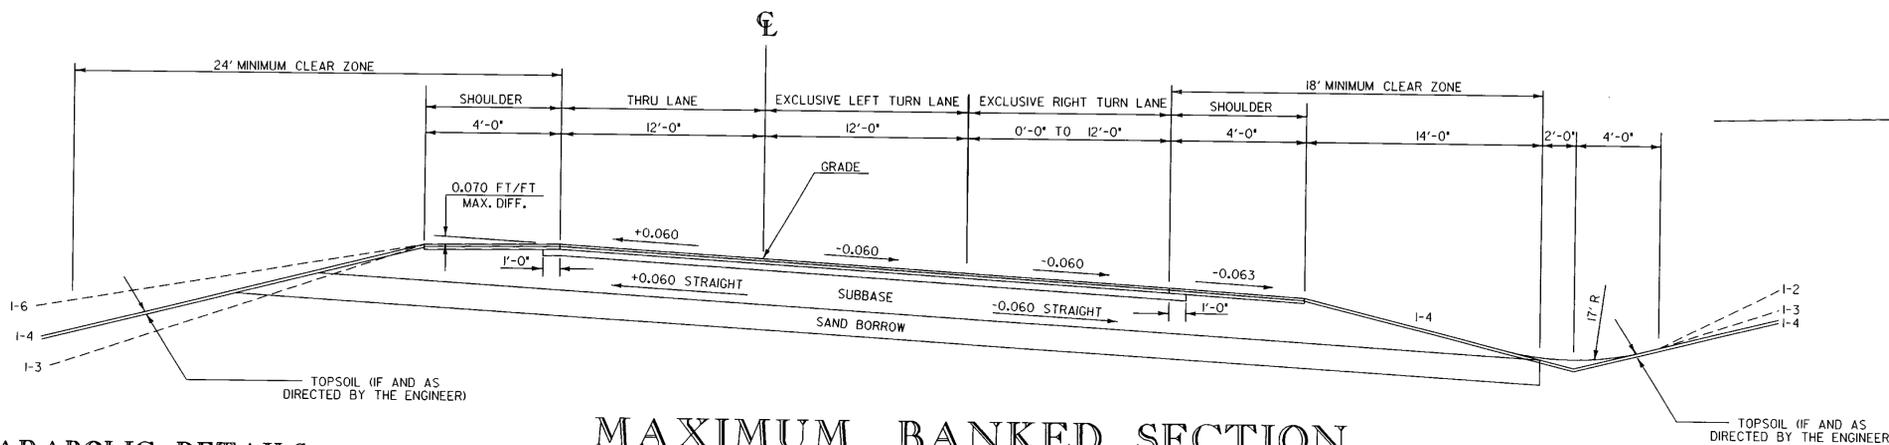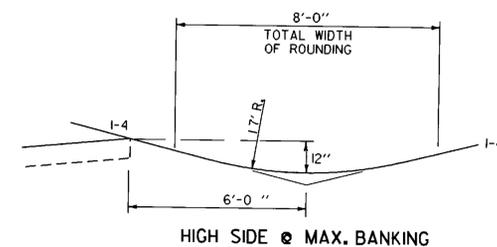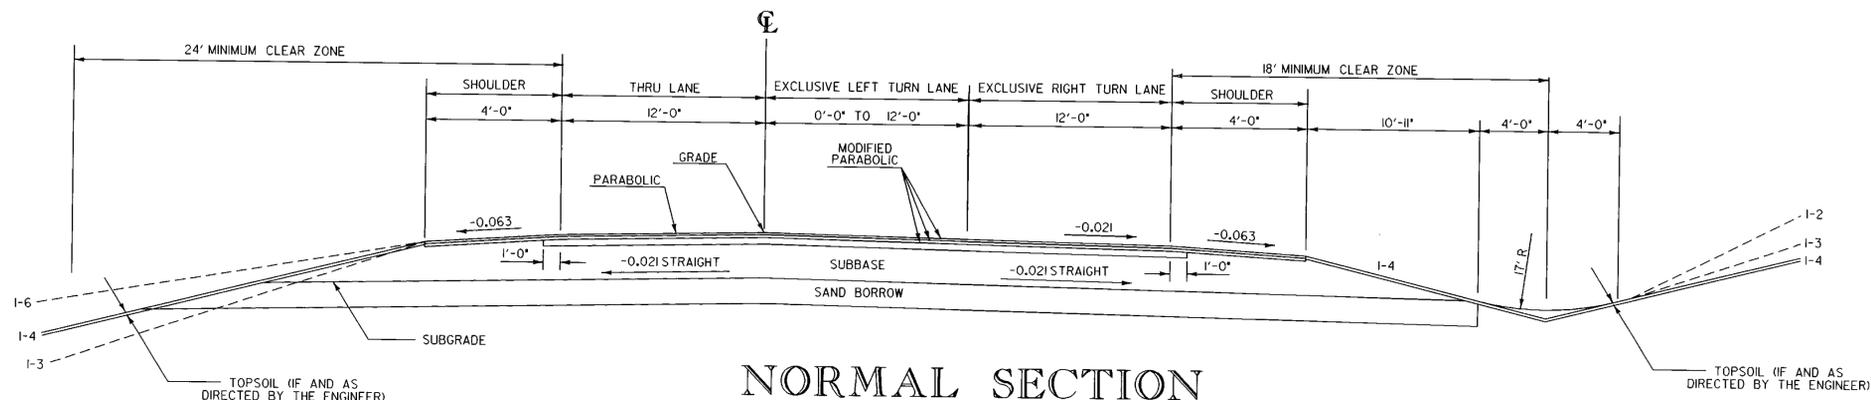

PARABOLIC DETAILS

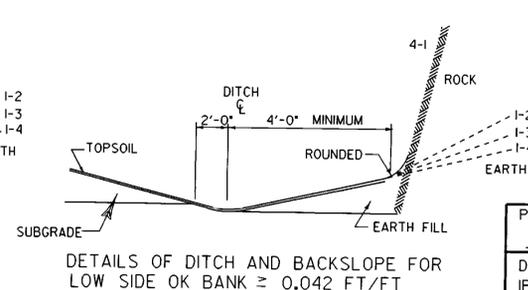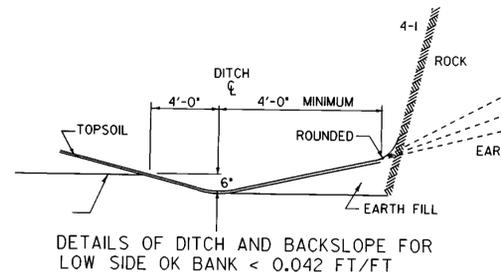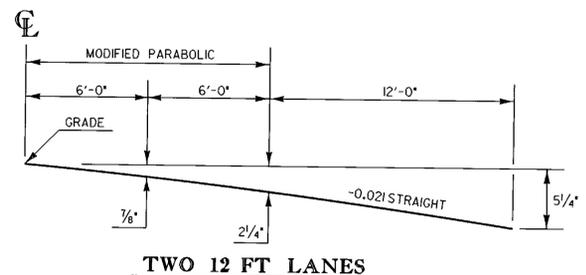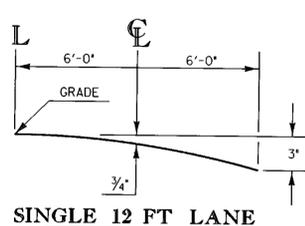

DATUM
 VERTICAL NGVD 1929
 HORIZONTAL N/A

PROJECT:	ST. ALBANS	PROJECT NO.:	HES 034-1(19)S
DESIGN FILE NAME:	SDDC/84E076/DE076XS.DGN	PLOT DATE:	12-JAN-1999
IPARM FILE NAME:	de076+p2.1	SURVEY DATE:	9/90
SURVEYED BY:	R. MOREAU	DRAWN BY:	MEUNIER
SQUAD LEADER:	S. MENARD	SHEET:	OF