


NOTE:
BEARING PLATE TO BE INSTALLED AT MIN 100 mm FROM EXISTING WALL, DIRECTLY BEHIND REINFORCING STEEL AND HELD IN PLACE BY A NUT LOCATED ON EACH SIDE. REINFORCING STEEL IS TO BE PLACED VERTICALLY IN THE CENTER OF POURED CONCRETE WALL AT MIN DISTANCE OF 150 mm FROM FACE OF NEW SOIL NAIL WALL.

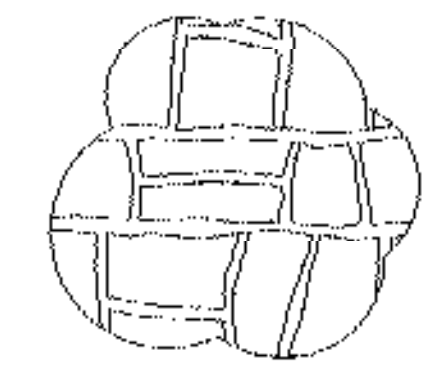

PATTERN SHALL BE RUSTIC ASHLAR CUSTOM ROCK #11003 OR EQUIVALENT FORM LINERS AS SPECIFIED CONTINUE 150mm BELOW GROUND LEVEL

PROJECT: BETHEL	PROJECT NO.: BRF0241 (33) C/2
DESIGN FILE NAME: 02c180/structures/s02c180soilna1.dgn	PLOT DATE: 14-APR-2005
IPARM FILE NAME: s02c180soilna112.	DRAWN BY: M. GAGULIC
DESIGNED BY: M. GAGULIC	CHECKED BY: K.M. HIGGINS
SQUAD LEADER: C.P. WILLIAMS	SHEET: 64 OF 130
SOIL NAIL WALL DETAILS - 2	