


3" BARK MULCH
AS SPECIFIED
TAPER AT BASE
AS SHOWN.

FORM SAUCER WITH
4" DIAMETER AND
CONTINUOUS RIM.

EXISTING GRADE

BACK-FILL WITH PLANTING
MIX OF 1/2 TOPSOIL,
1/4 NATIVE MATERIAL,
AND 1/4 COMPOST
AS APPROVED BY THE
ENGINEER. TAMP TO
REMOVE AIR POCKETS
AND WATER THOROUGHLY
AT TIME OF
PLANTING.

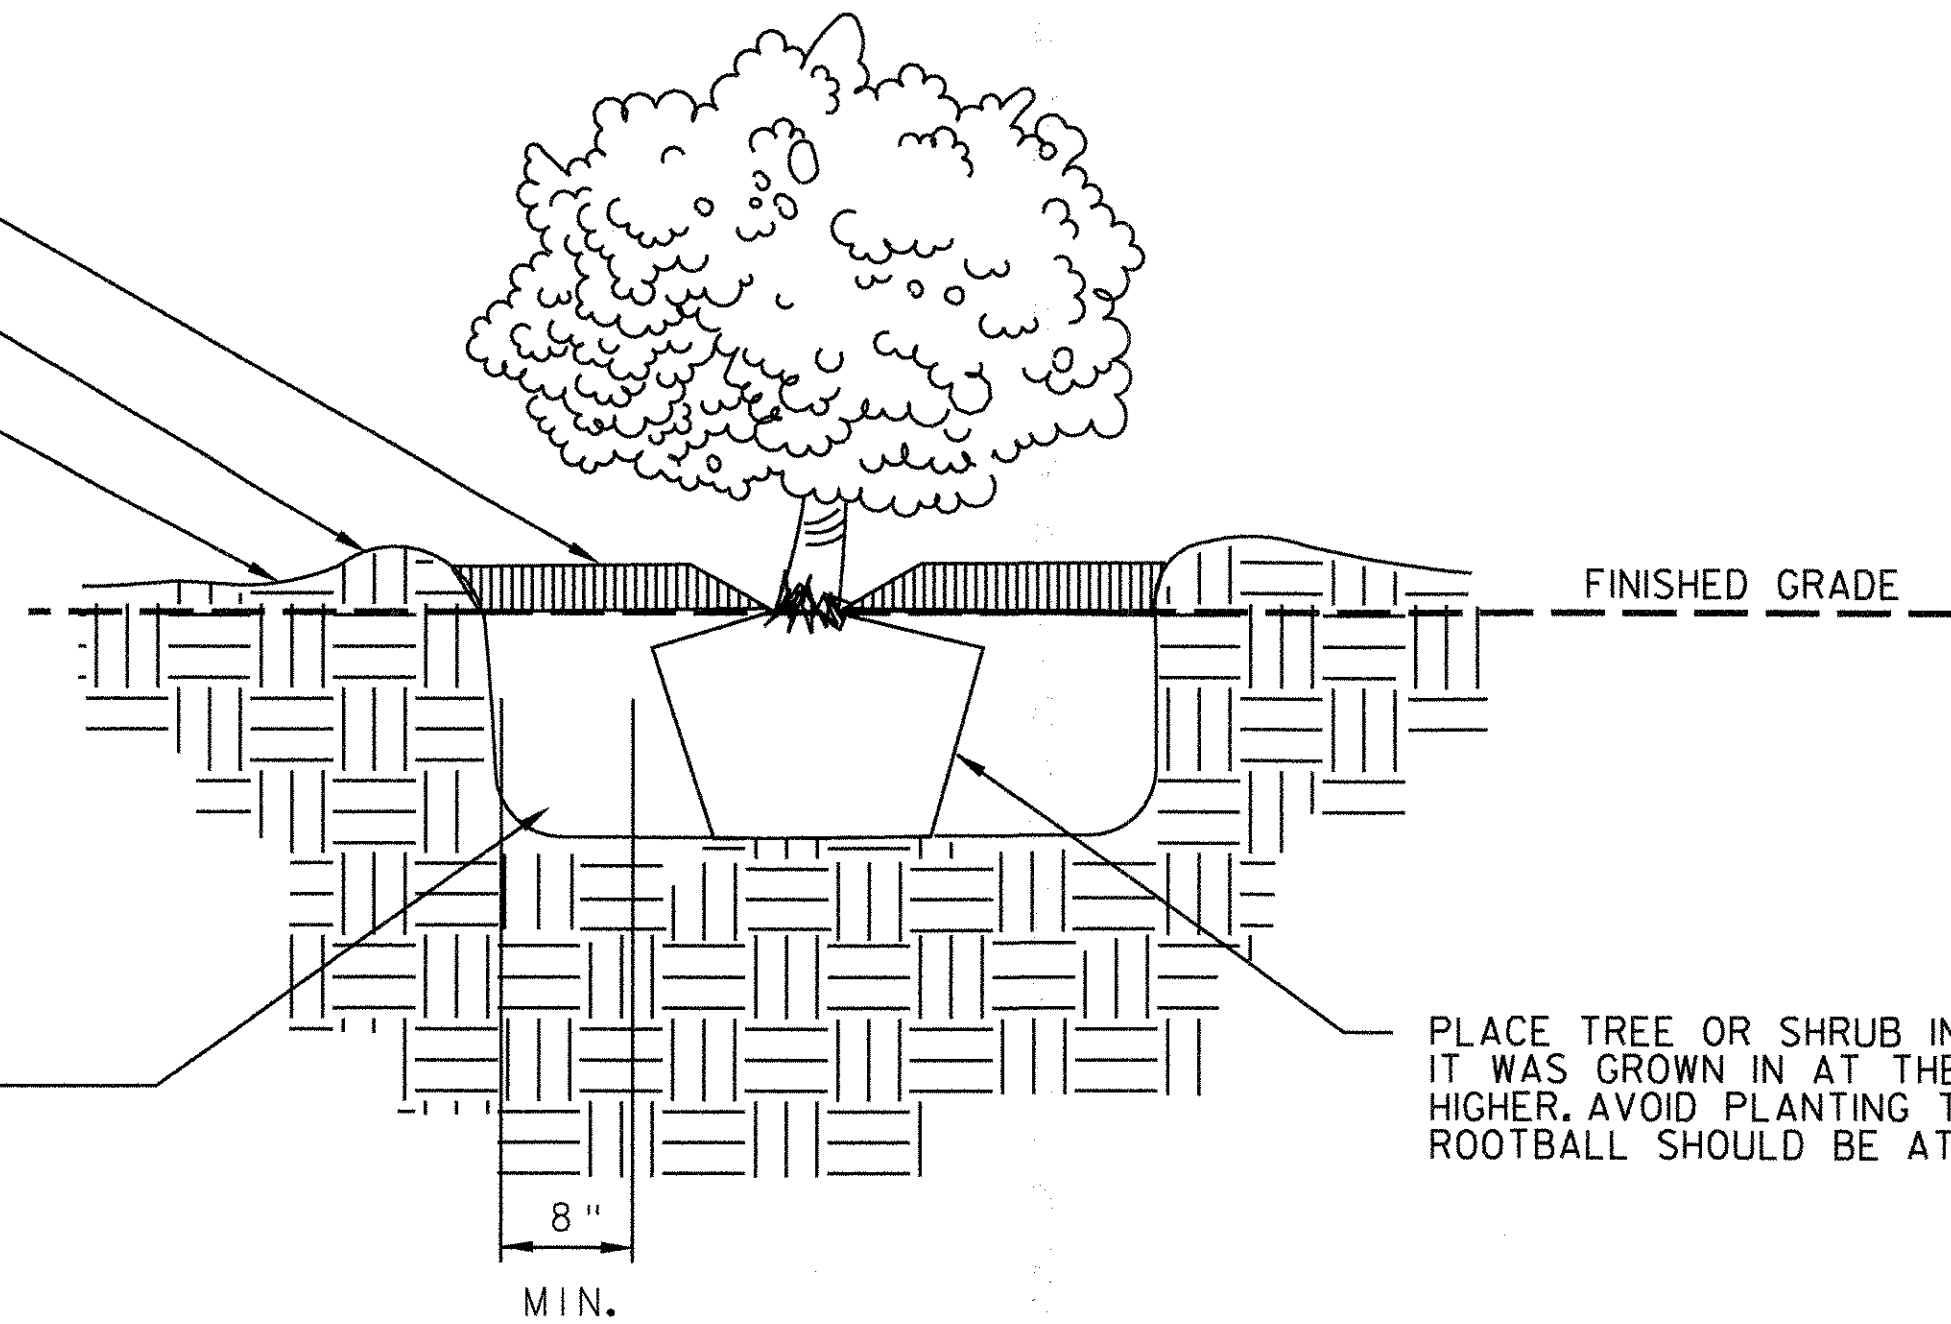


PLACE TREE OR SHRUB IN THE HOLE AT THE LEVEL
IT WAS GROWN IN AT THE NURSERY, OR SLIGHTLY
HIGHER. AVOID PLANTING TOO DEEP. TOP OF
ROOTBALL SHOULD BE AT FINISHED GRADE.

SHRUB PLANTING DETAIL
NOT TO SCALE

MAINTAIN MIN. 4" DIA.
AND CONTINUOUS RIM
ON LOWER SIDES OF
PLANTING TO RETAIN
WATER.

BACK-FILL WITH PLANTING
MIX OF 1/2 TOPSOIL,
1/4 NATIVE MATERIAL,
AND 1/4 COMPOST
AS APPROVED BY THE
ENGINEER. TAMP TO
REMOVE AIR POCKETS
AND WATER THOROUGHLY
AT TIME OF
PLANTING.

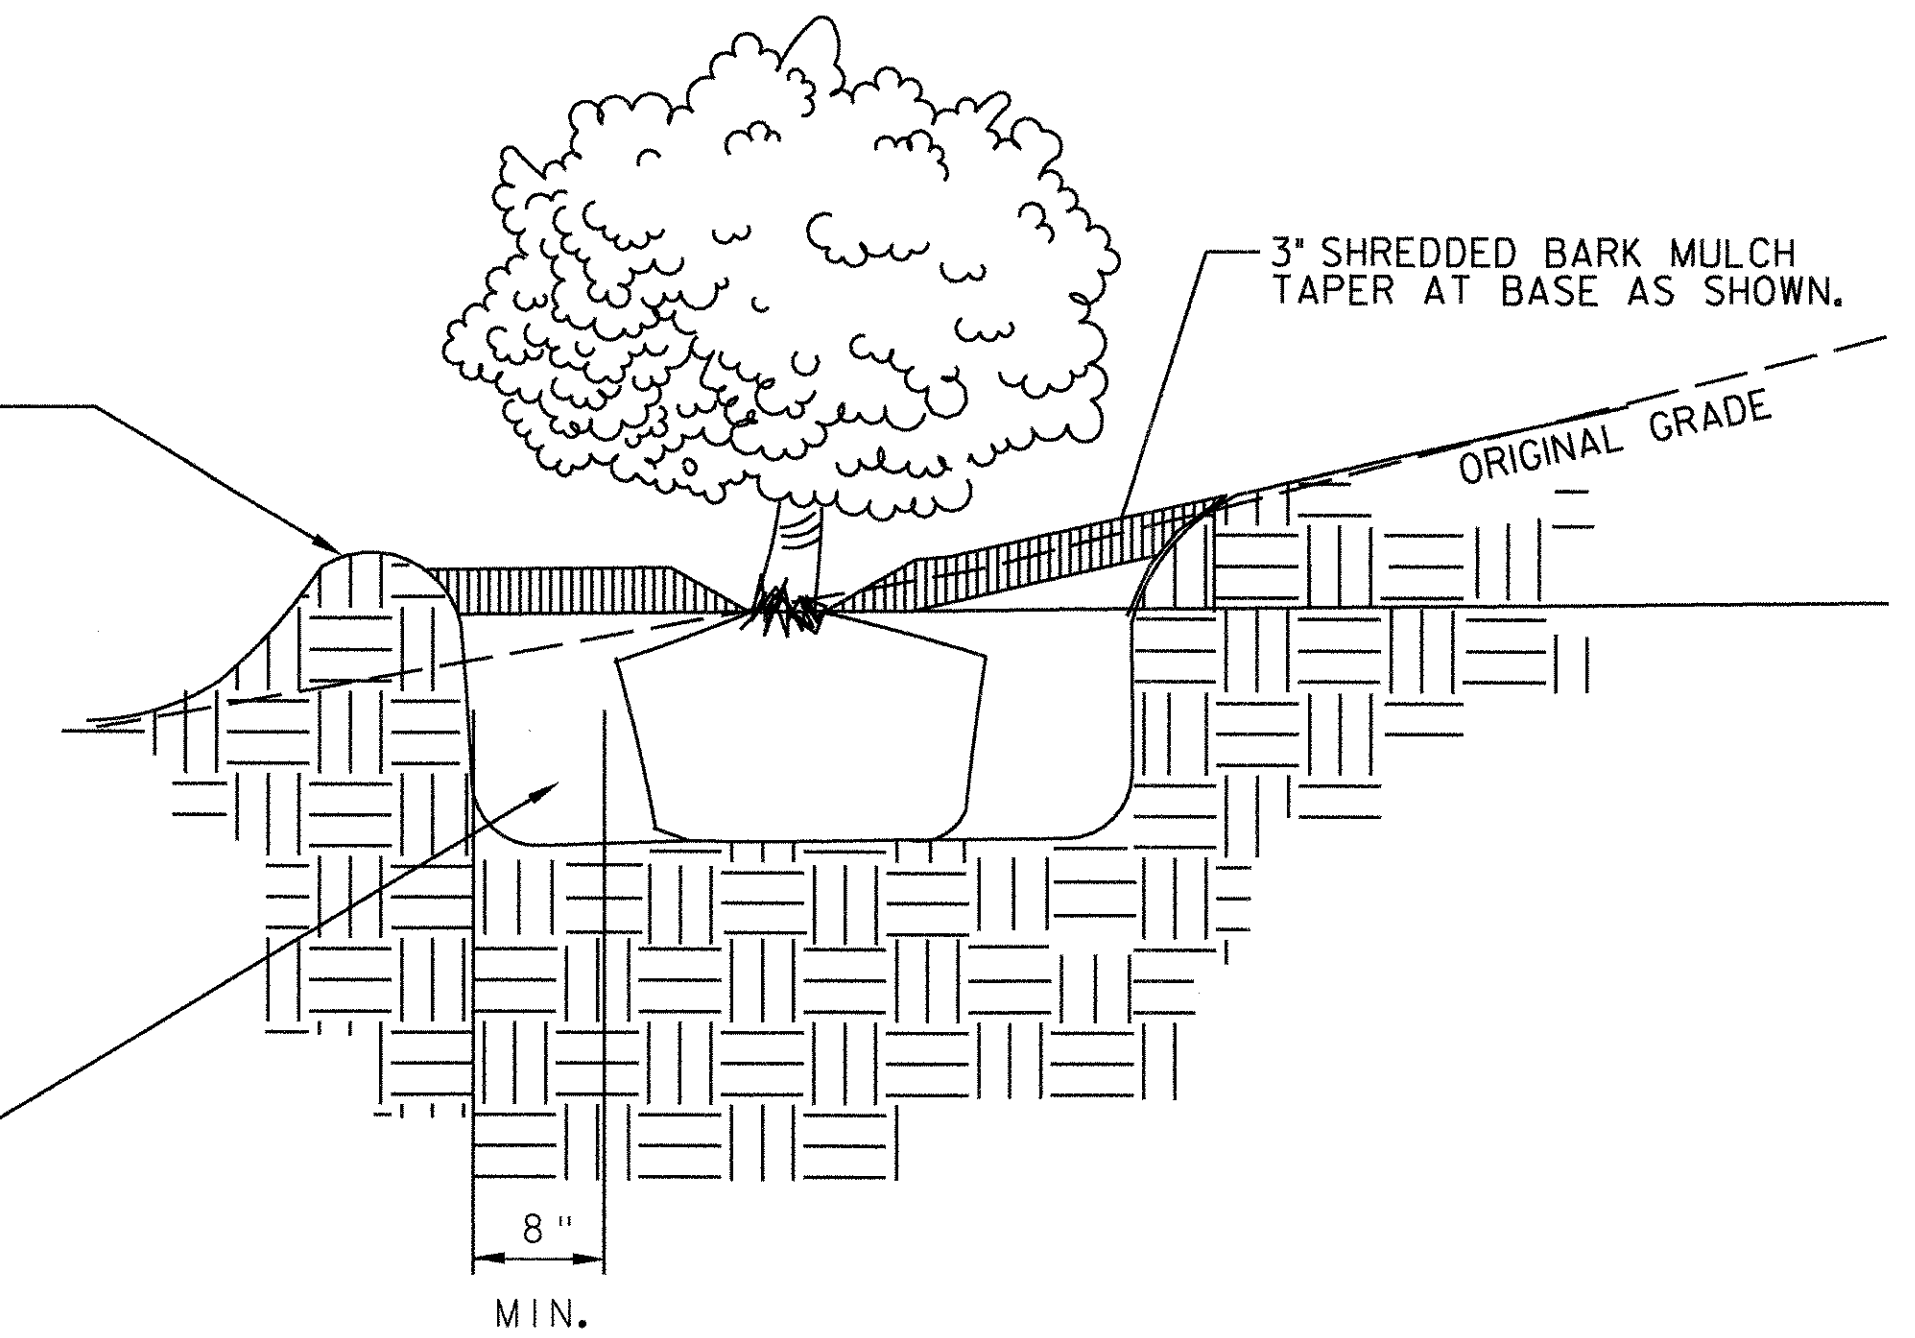

SHRUB PLANTING ON SLOPES DETAIL
NOT TO SCALE

GENERAL NOTES:

1. SECTION 656 "PLANTING TREES, SHRUBS AND VINES" SHALL BE FOLLOWED.
2. CLEAN CUT ALL ROOTS. TRANSPLANT TREES WITH TREE SPADE OF SUITABLE SIZE TO THE EXISTING TREES. IF PLANT MATERIAL IS DAMAGED AND NOT IN VIABLE CONDITION IT SHALL BE REPLACED BY THE CONTRACTOR AS DIRECTED BY THE RESIDENT ENGINEER.
3. THE NEW PLANTING HOLES SHALL BE PREPARED AND PRE-DUG SO THE TREES AND SHRUBS CAN BE TRANSPLANTED THE SAME DAY OR WITH 24 HOURS AT THE MOST.
4. IF NATIVE SOILS ARE DETERMINED TO BE UNSUITABLE THE CONTRACTOR SHALL REPLACE WITH APPROVED 3/4 TOPSOIL AND 1/4 COMPOST MIX.

PROJECT NAME: HINESBURG
PROJECT NUMBER: HES 021-K(20)

FILE NAME: z04b2061s det.dgn
PROJECT LEADER: G. BAKOS
DESIGNED BY: D. PECK
LANDSCAPING DETAILS

PLOT DATE: 2/18/2009
DRAWN BY: D. PECK
CHECKED BY: G. BAKOS
SHEET 6 OF 25