LOCATION				FEET OF DITCHING			MISC. ITEMS			REMARKS
SITE	MILE MARKER	MILE MARKER	POS.	PERCENT GRADE			653.20	613.10	649.31	
				0-1	1-2.5	2.5-10	TEMP. EROS. MATT.	STONE FILL TYP. I	GEOT. UNDER STONE FILL	
COLCHESTER - GEORGIA I-89							SY	CY	SY	
1	10+55		RT		50		22.2			EXIT 18 RAMP A
2	3+81	5+31	RT		300		133.3			EXIT 18 RAMP B
3	5+41	8+41	LT		335		148.9			EXIT 18 RAMP B
4	2+10	5+00	LT		290		128.9			EXIT 17 RAMP C
5	7+00	9+95	LT		295		131.1			EXIT 17 RAMP C
6	8+00	10+00	RT		200		88.9			EXIT 17 RAMP C
7	15+50	5181+16	RT		303		134.7			EXIT 17 RAMP C
8	5262+90	5267+00	RT		410		182.2			CLEAN OUTLET
9	5262+91		RT		40		17.8			
10	5266+45	5270+00	RT		355		157.8			
11	5269+45	5272+50	RT		308		136.9			
12	5284+90	5285+90	LT		100		44.4			
13	5297+25	5297+85	LT		60		26.7			CLEAN OUTLET
14	5297+45	5297+60	RT		15		6.7			CLEAN 36' CMP OUTLET
15	5324+14		LT	20						
16	5333+33	5334+38	RT		200		88.9			
17	5354+55	5354+75	RT		20		8.9			
18	5368+70	5369+76	RT		106		47.1			
19	5373+95	5374+45	RT		50		22.2			
20	5443+39		RT		20		8.9			
		SUB-TOTAL		20	3457	-	1536.5	-	-	
		ROUNDING		-	-	-	63.5	-	-	
		TOTAL		20	3457	-	1600	-	-	

NEW LOCATIONS

99.95	100.00	LT
99.98	100.00	RT
100.35	100.40	LT
101.10	101.20	RT
101.23	101.25	RT
101.70	101.72	RT
101.77	101.95	RT
102.45	102.50	RT
103.00	103.10	RT
103.24	103.26	RT
106.48	106.51	RT

LOCATION				FEET OF DITCHING			MISC. ITEMS			REMARKS
SITE	STATION	STATION	POS.	PERCENT GRADE			653.20	613.10	649.31	
				0-1	1-2.5	2.5-10	TEMP. EROS. MATT.	STONE FILL TYP. I	GEOT. UNDER STONE FILL	
							SY	CY	SY	

LOCATION				FEET OF DITCHING			MISC. ITEMS			REMARKS
SITE	STATION	STATION	POS.	PERCENT GRADE			653.20	613.10	649.31	
				0-1	1-2.5	2.5-10	TEMP. EROS. MATT.	STONE FILL TYP. I	GEOT. UNDER STONE FILL	
							SY	CY	SY	

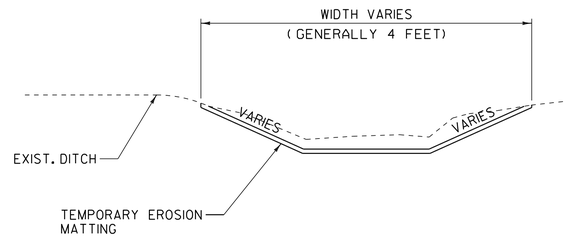

DITCH DETAIL

NOT TO SCALE

NOTES:

1. PIPE INLET AND OUTLET AREAS, AND DITCH CLEANING THROUGH PROJECT, SHALL BE PERFORMED AT LOCATIONS IDENTIFIED ON THIS SHEET AND AS DIRECTED BY THE RESIDENT ENGINEER. PAYMENT WILL BE UNDER THE APPLICABLE EQUIPMENT RENTAL ITEM(S).

2. ESTIMATED QUANTITIES OF TEMPORARY EROSION MATTING AND SEED HAVE BEEN INCLUDED. DITCHES WITH A GRADE LESS THAN 1 PERCENT SHALL BE SEEDED. EROSION MATTING SHALL BE USED IN ALL DITCHES WITH A GRADE BETWEEN 1 AND 2.5 PERCENT.

DITCH CLEANING DETAIL SHEET

PROJECT NAME: COLCHESTER - GEORGIA
PROJECT NUMBER: IM 089-3(64)

FILE NAME: p06a196.dgn
PROJECT LEADER: CDL
DESIGNED BY: SJL
PLOT FILE: p06a196dcds.i

PLOT DATE: 04-OCT-2011 16:52
DRAWN BY: SJL
CHECKED BY: EPD
SHEET 11 OF 23