



FILTER BAG

APPLICATION NOTES:

A. THE PRIMARY PURPOSE OF THE FILTER BAG IS TO RETAIN SILT, SAND, AND FINES DURING DEWATERING OPERATIONS WHILE ALLOWING WATER TO PASS THROUGH THE BAG.

GENERAL NOTES:

1. FILTER BAG SHALL BE INSTALLED ON A VEGETATED SLOPE TO ALLOW INCOMING WATER TO FLOW THROUGH THE BAG. FILTER BAGS MAY ALSO BE PLACED ON COARSE AGGREGATE, STONE, OR HAYBALES TO INCREASE FILTRATION EFFICIENCY.
2. FILTER BAG SHALL BE LOCATED A MINIMUM OF 50 FEET FROM WATERS OF THE STATE UNLESS OTHERWISE APPROVED BY THE ENGINEER.
3. THE NECK OF THE FILTER BAG SHALL BE STRAPPED TIGHTLY TO THE DISCHARGE HOSE.
4. FILTER BAG SHALL BE INSPECTED DAILY FOR TEARS, PUNCTURES OR ANY IMPERFECTIONS THAT COULD CAUSE THE BAG TO MALFUNCTION IN ANY MANNER.
5. A FILTER BAG IS FULL WHEN IT NO LONGER CAN EFFICIENTLY FILTER SEDIMENT OR ALLOW WATER TO PASS AT A REASONABLE RATE. FILTER BAG SHALL BE DISPOSED OF AS APPROVED IN THE EPSCP OR AS DIRECTED BY THE ENGINEER.
6. THIS ITEM SHALL BE PAID UNDER ITEM 653.45 FILTER BAG.

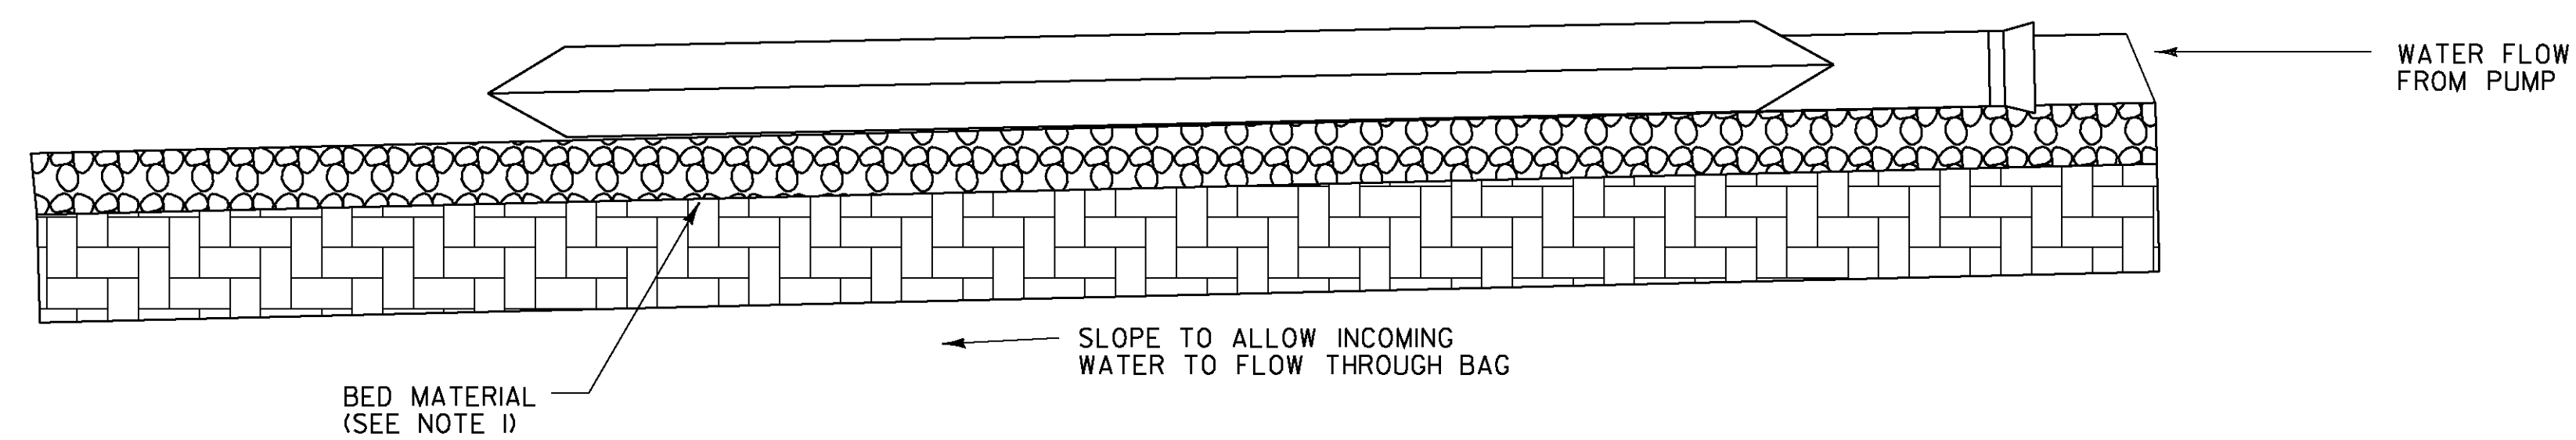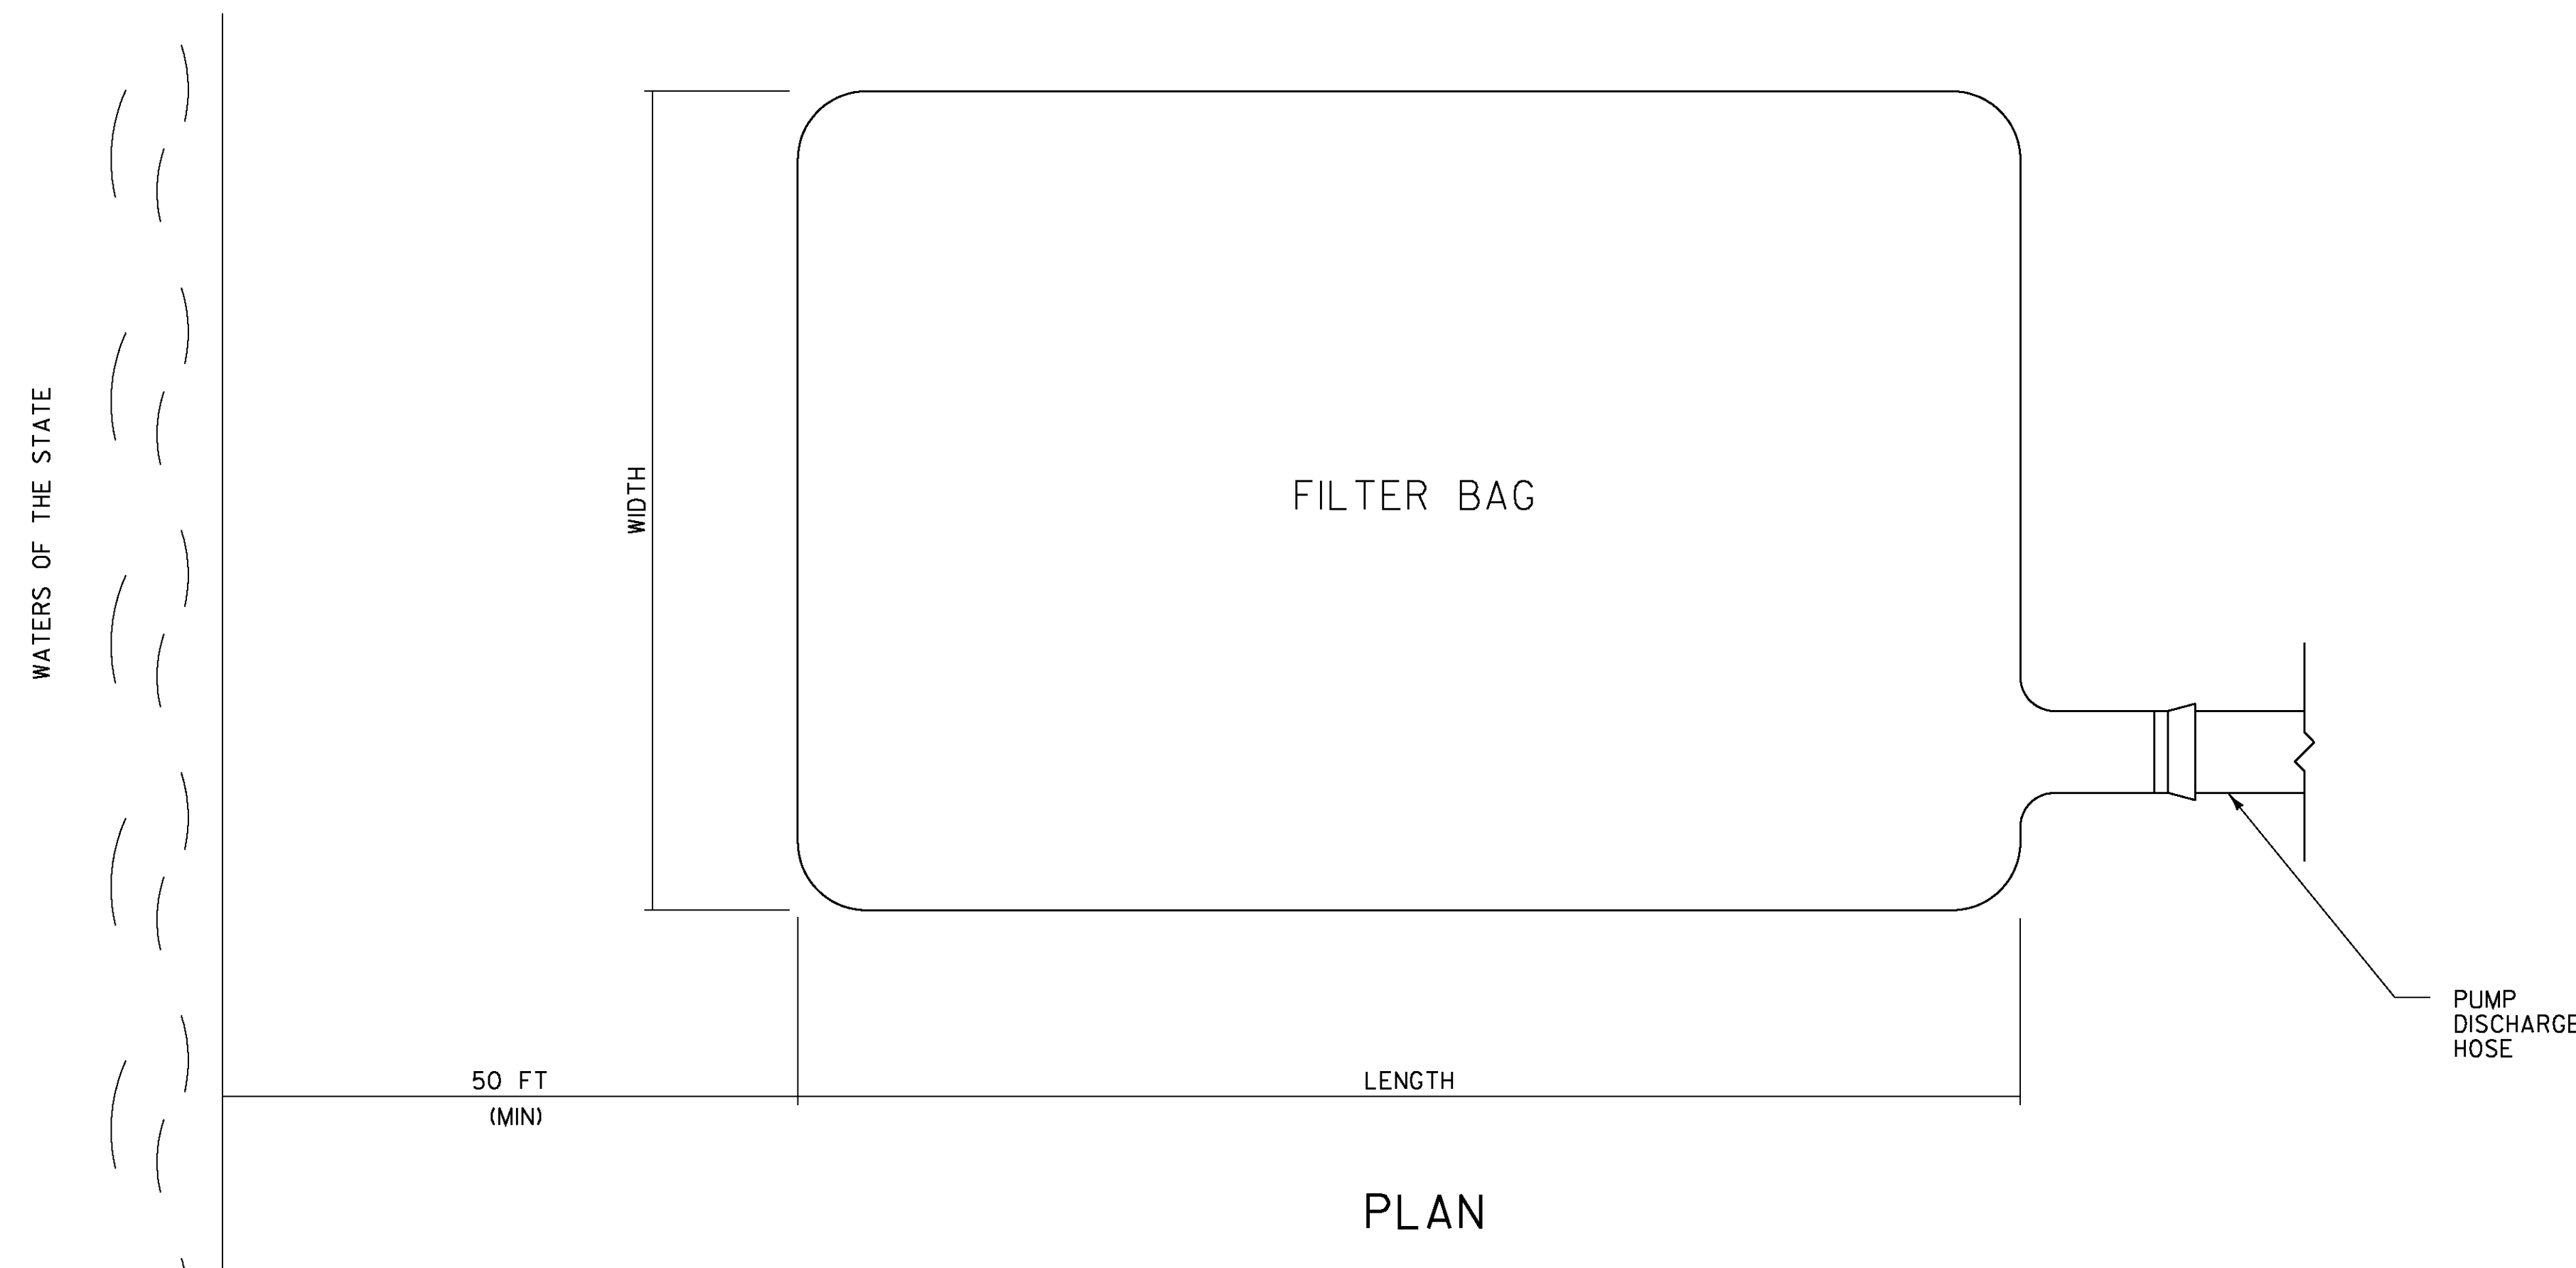

FILTER BAG
NOT TO SCALE

NOTE:
ENGLISH UNITS RETAINED FROM ORIGINAL DETAIL.

EROSION PREVENTION & SEDIMENT CONTROL DETAILS FILTER BAG

VERMONT AGENCY OF TRANSPORTATION

PROJECT NAME: BENNINGTON PROJECT NUMBER: AC NH 019-(153)	FILE NAME: ...\\plot_files\zd307c3det.epsc.pft PLOT DATE: 5/16/2011 DESIGN SUPERVISOR: DRAWN BY: DESIGNED BY: CHECKED BY: EP & SC DETAILS - 7 SHEET 140 OF 577
---	--

v:\953\active\9530002A\transportation\drawing\contract_3\plot_files\zd307c3det.epsc.pft