



TRAFFIC CONTROL TYPICAL SECTIONS EAST ROAD DETOUR

MATERIAL ITEM	THICKNESS TOLERANCE	100	400
PAVEMENT COURSES (TOTAL DEPTH)	+/- 5	SUPERPAVE BITUMINOUS CONCRETE PAVEMENT (TYPE III)	
SUBBASE	+/- 30	SUBBASE OF DENSE GRADED CRUSHED STONE OR CRUSHED GRAVEL	

- NOTES:**
- ELIMINATE TOPSOIL AND SEEDING BEHIND GUARDRAIL TO SUBGRADE CATCH POINT.
 - FOR SLOPES IN SOLID ROCK EXCAVATION AND DRILLING AND BLASTING OF SOLID ROCK SUBGRADE, SEE STD. SHEET A-60 AND A-62 AND DETAILS
 - REFER TO TYPICAL SECTION SHEET, TS-06 FOR SEEDING FORMULA AND ADDITIONAL GENERAL NOTES.

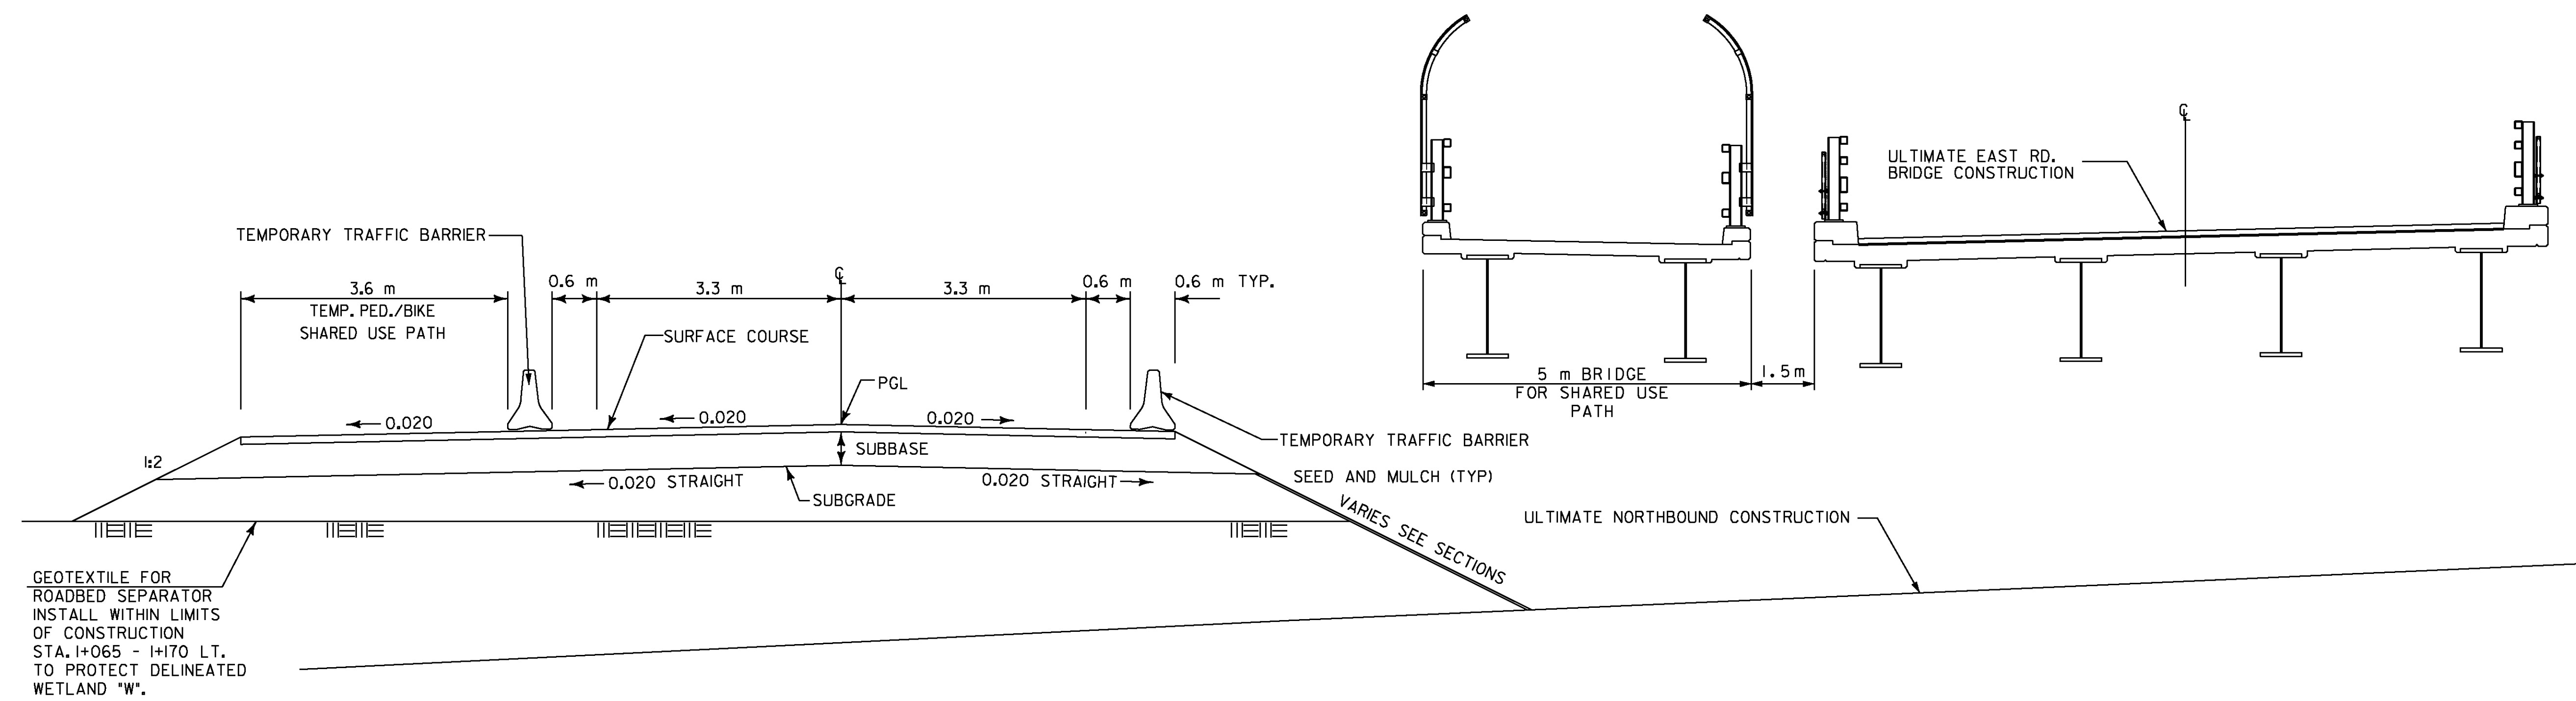

NORMAL SECTION
NOT TO SCALE

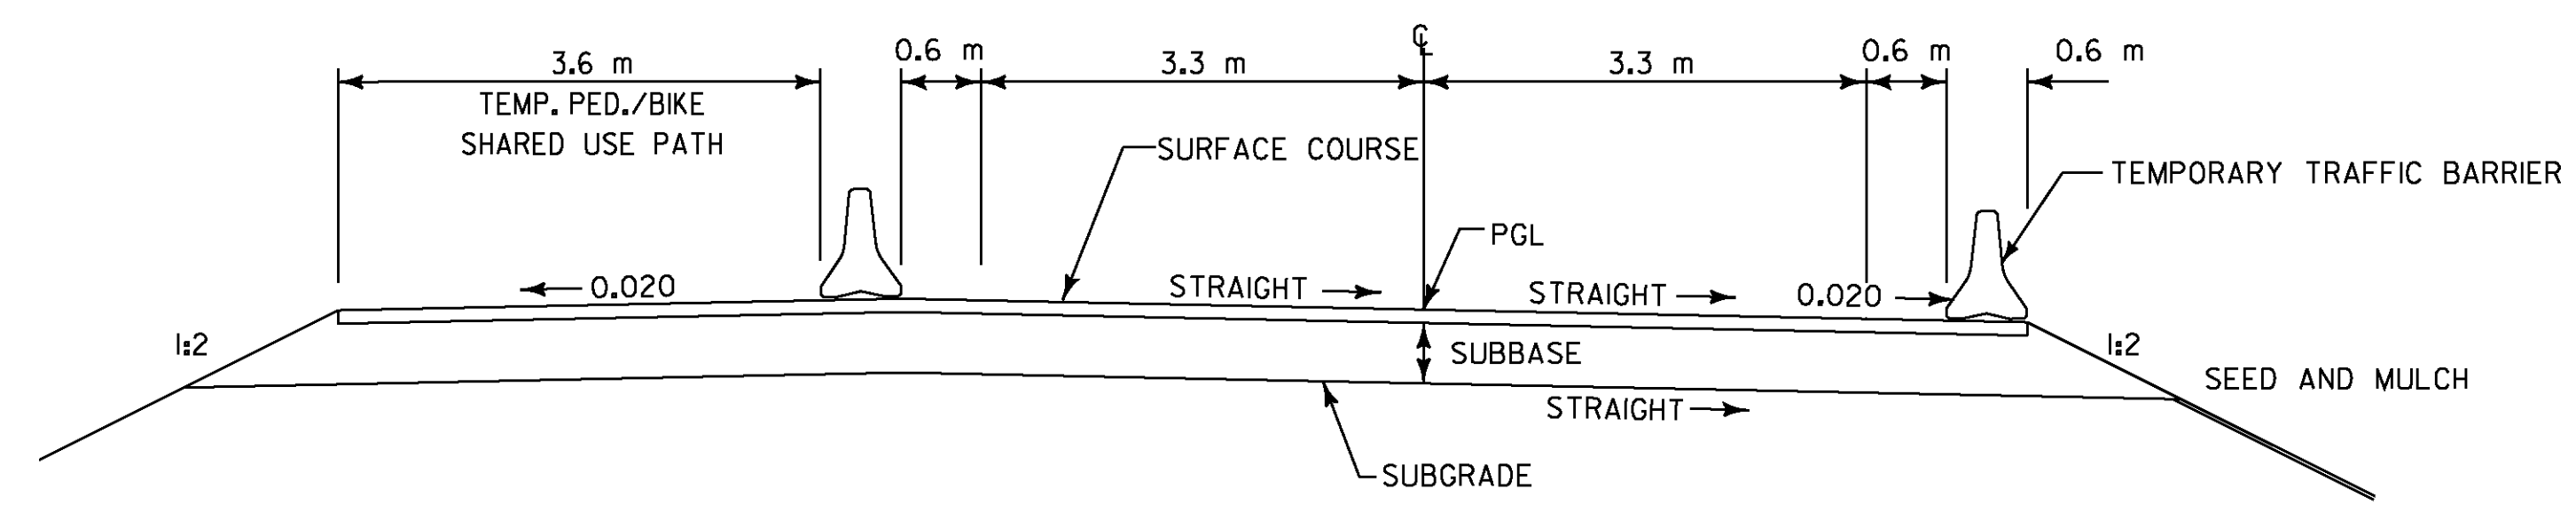

MAXIMUM BANKED SECTION
NOT TO SCALE

NOTE: ALL DIMENSIONS ARE IN MILLIMETERS (mm) EXCEPT WHERE NOTED.

VERMONT AGENCY OF TRANSPORTATION	
	PROJECT NAME: BENNINGTON
	PROJECT NUMBER: AC NH 019-(153)
	FILE NAME: ...\\plot_files\zd307c3tc.typ.ptf
	DESIGN SUPERVISOR: GREG EDWARDS
DESIGNED BY: MARC FOISY	PLOT DATE: 5/16/2011
EAST ROAD DETOUR ERD - 01	CHECKED BY: GARY SANTY
	SHEET 169 OF 577

PGL=PROFILE GRADE LINE

V:\9513\active\95130002A\transportation\drawing\contract_3\plot_files\zd307c3tc.typ.ptf