



TYPICAL SECTIONS - MISCELLANEOUS DETAILS

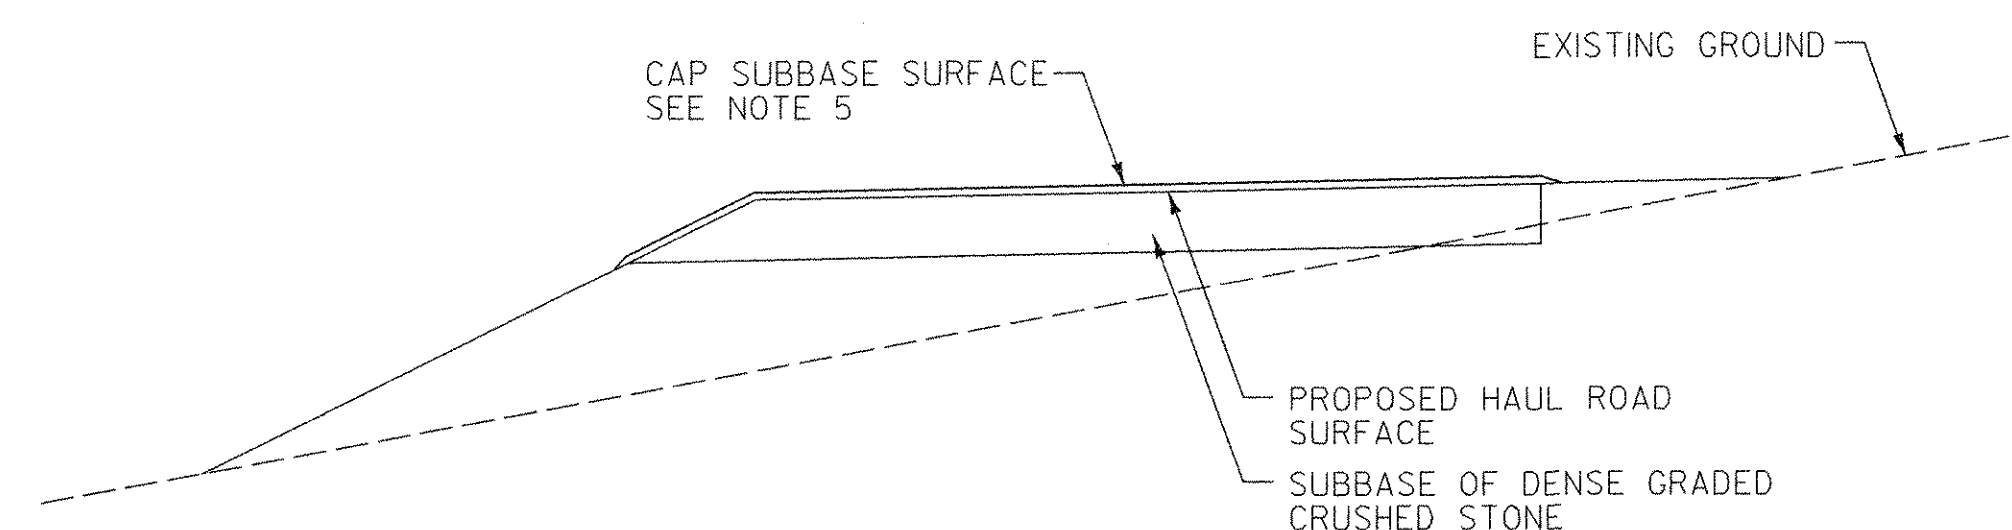


**HAUL ROAD A & B
POST-CONSTRUCTION DETAIL**

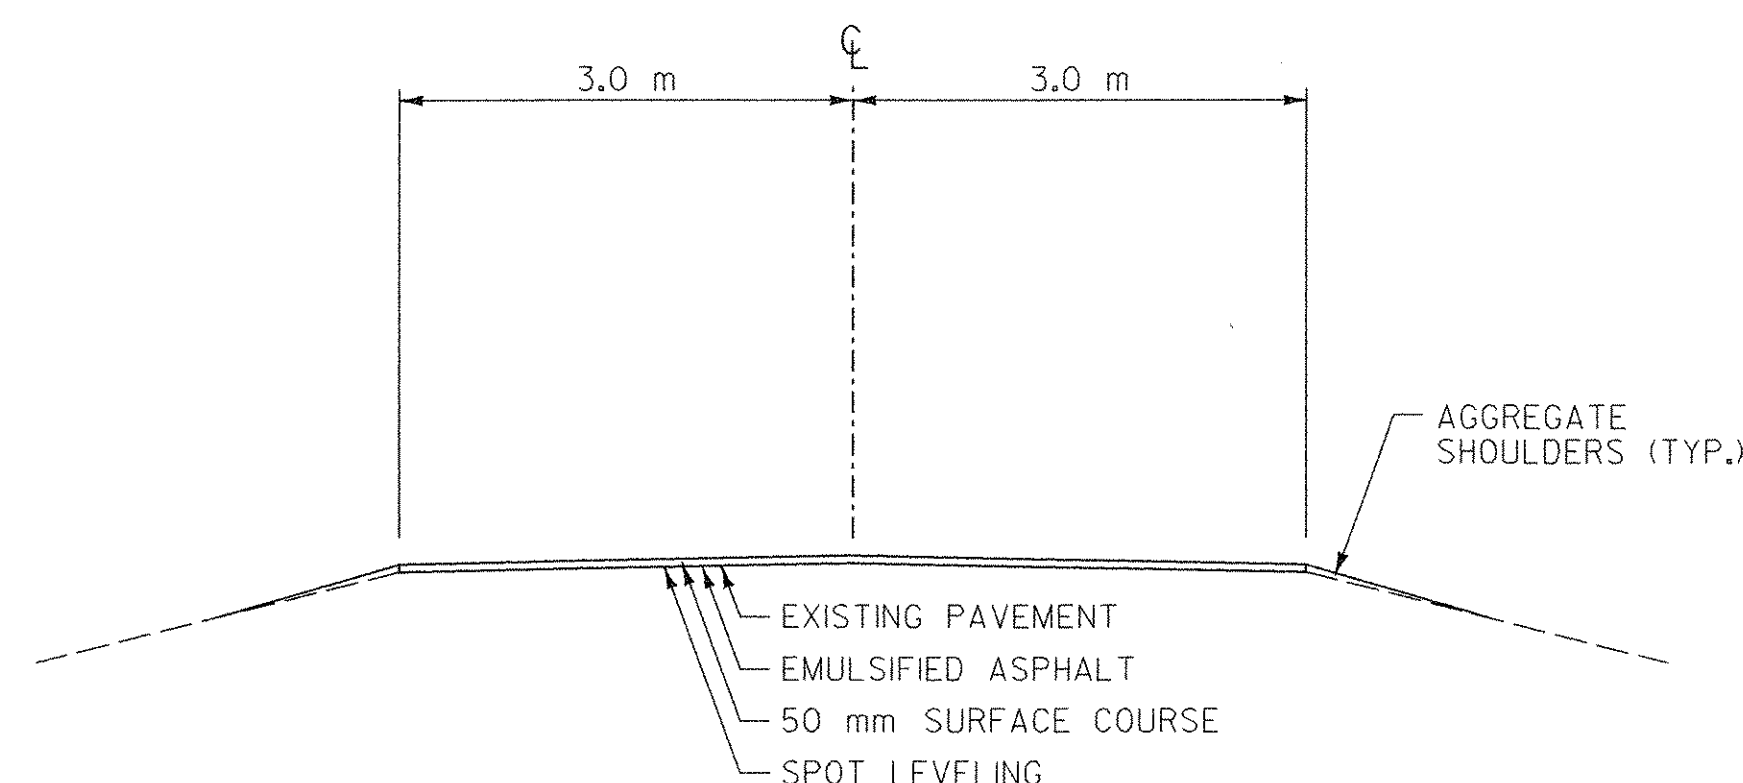

**MIDDLE POWNAL ROAD
OVERLAY DETAIL**

NOTES:


1. THE SURFACE COURSE SHALL BE TYPE III SUPERPAVE BITUMINOUS CONCRETE PAVEMENT (PG 64-28). THE LEVELING COURSE SHALL BE TYPE IVS SUPERPAVE BITUMINOUS CONCRETE PAVEMENT (PG 64-28) OR AS DIRECTED BY THE RESIDENT ENGINEER.
2. EMULSIFIED ASPHALT SHALL BE APPLIED ON ALL EXISTING PAVEMENT SURFACES AND BETWEEN ALL COURSES OF PAVEMENT AT THE RATE OF 0.12 L/m² OR AS DIRECTED BY THE RESIDENT ENGINEER.
3. SUPERPAVE BITUMINOUS CONCRETE PAVEMENT TOLERANCE = ±5 mm (TOTAL PAVEMENT THICKNESS EXCLUDING LEVELING).
4. SPOT LEVELING HAS BEEN ESTIMATED AT 25% OF THE ENTIRE AREA OF PAVEMENT AND SHALL BE PERFORMED AS DIRECTED BY THE RESIDENT ENGINEER.
5. UPON COMPLETION OF STAGE ONE SITE CONSTRUCTION, THE CONTRACTOR SHALL CAP THE EXPOSED HAUL ROAD SURFACE WITH 50 mm TOPSOIL AND SEED.

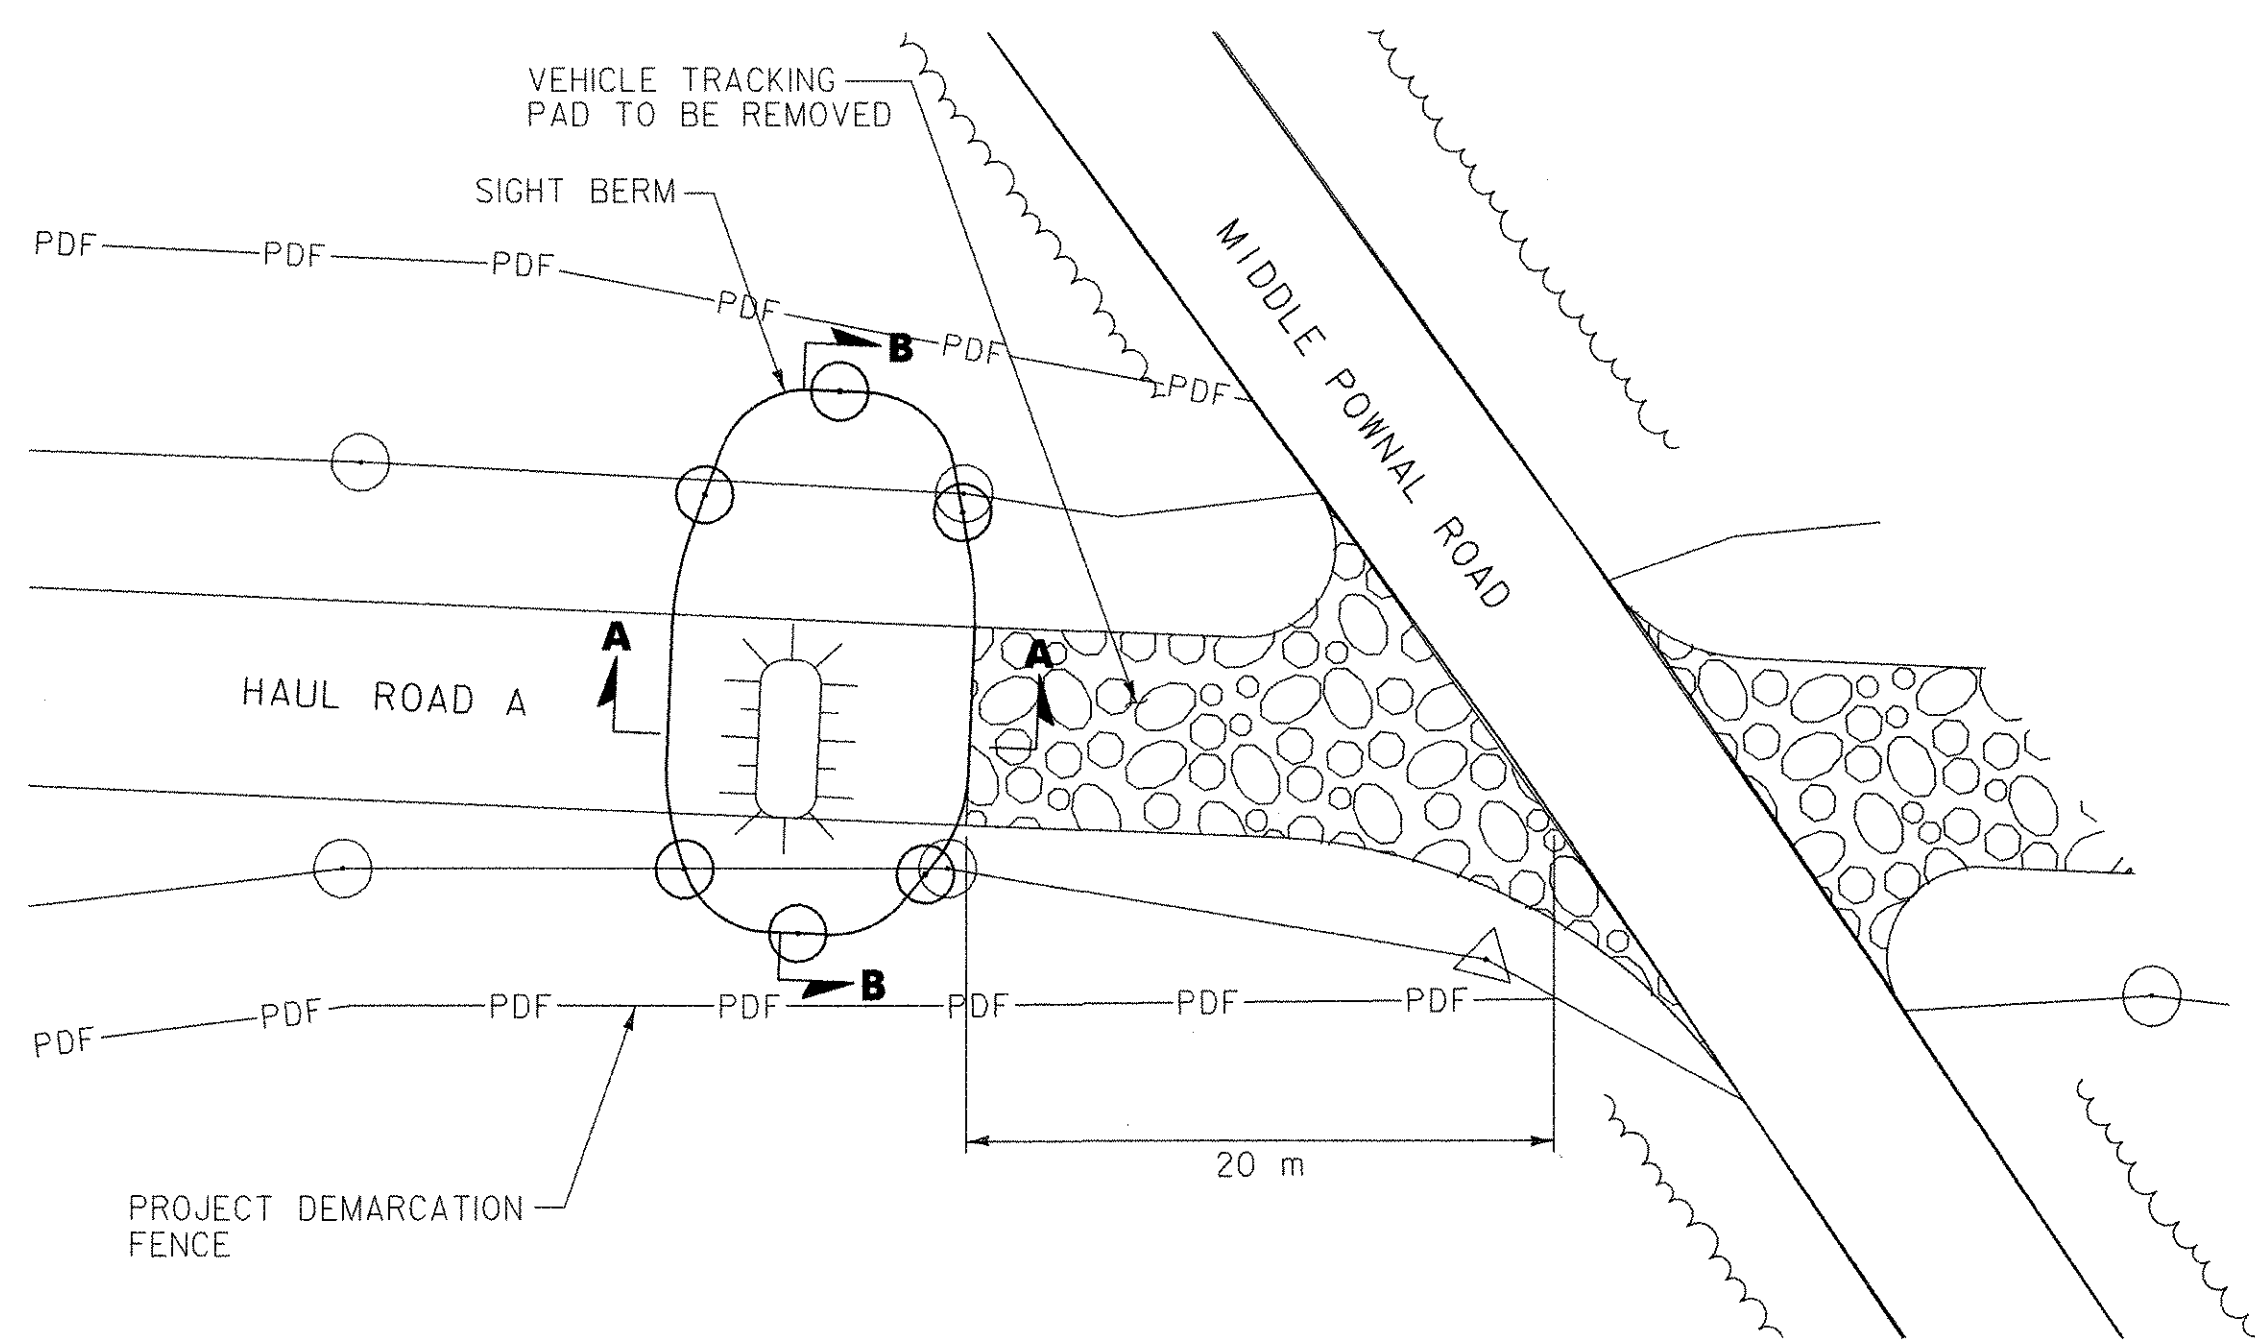


SIGHT BERM DETAIL

NOTES:

1. THE CONTRACTOR SHALL CONSTRUCT A SIGHT BERM AS SHOWN OR AS DIRECTED BY THE RESIDENT ENGINEER UPON COMPLETION OF STAGE ONE SITE'S CONSTRUCTION TO DISCOURAGE PUBLIC USE OF THE HAUL ROAD.
2. THE CONTRACTOR SHALL SEED THE SIGHT BERM AND PAYMENT WILL BE INCLUDED UNDER ITEM 651J5 SEED.

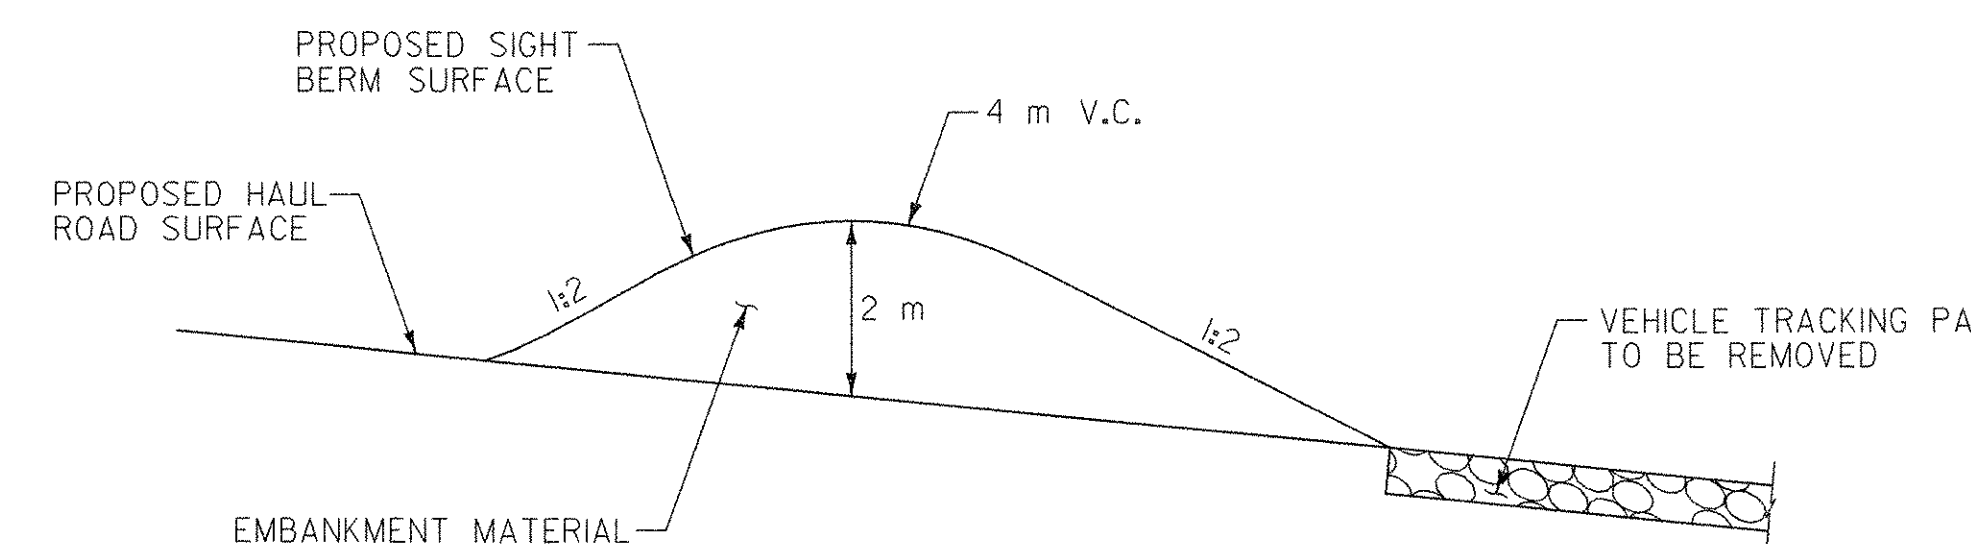

SECTION A-A

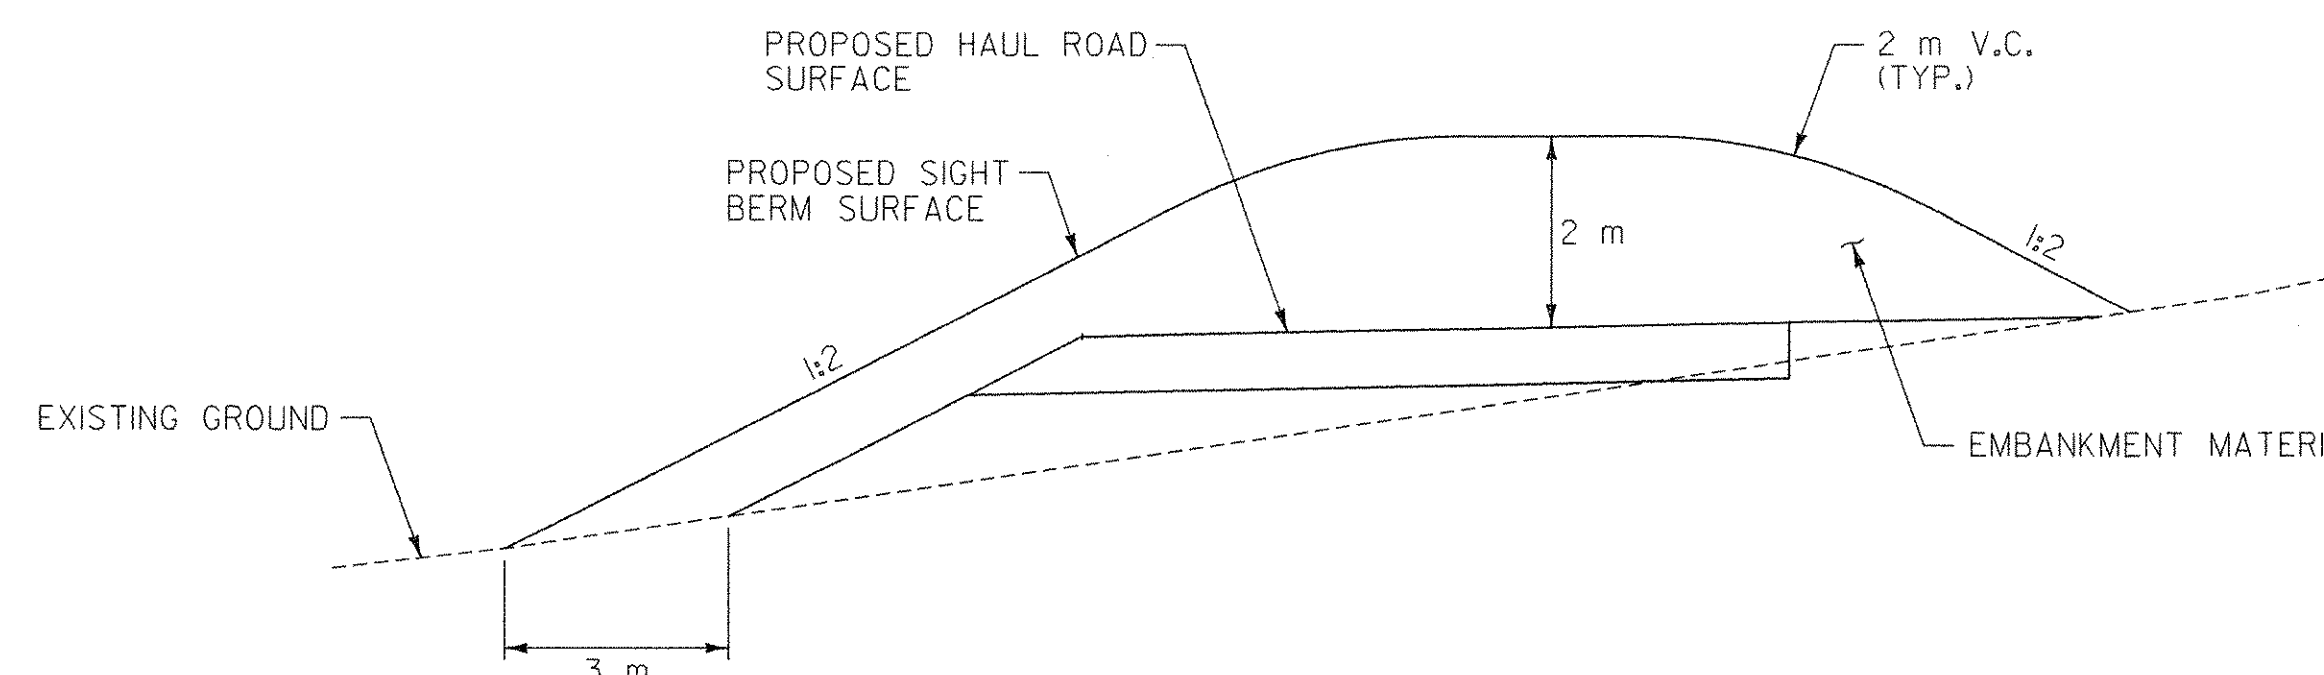

SECTION B-B

NOT TO SCALE
ALL DIMENSIONS ARE IN MILLIMETERS EXCEPT WHERE OTHERWISE NOTED

VERMONT AGENCY OF TRANSPORTATION



PROJECT NAME: BENNINGTON
PROJECT NUMBER: AC NH 019-(K53)

FILE NAME: ZD048TYP.DGN
PROJECT LEADER: D.E.G.
DESIGNED BY: J.S.P.

PLOT DATE: 5/18/2007
DRAWN BY: J.S.P.
CHECKED BY: D.E.G.
SHEET 426 OF 577

TYPICAL SECTION TS-3

FILE NAME: I:\9819\mstn\03\clough\Stage One Sites\zd048typ_haul.dgn
DATE/TIME: 5/18/2007
USER: J3076

DATUM	
VERTICAL	NAVD 88
HORIZONTAL	NAD 83 (1992)