


TYPICAL SECTION-VT ROUTE 9


MATERIAL ITEM	THICKNESS TOLERANCE
PAVEMENT COURSES (TOTAL DEPTH)	+/- 5
SUBBASE (TOTAL DEPTH)	+/- 25
SAND BORROW (TOTAL DEPTH)	+/- 25

90	SUPERPAVE BITUMINOUS CONCRETE PAVEMENT, 40 TYPE IIS, 50 TYPE IIS
100	SUPERPAVE BITUMINOUS CONCRETE PAVEMENT, TYPE IS
600	SUBBASE OF DENSE GRADED CRUSHED STONE
400	SAND BORROW SUBBASE OF DENSE GRADED CRUSHED STONE, (MOD.)
90	SHOULDERS: SUPERPAVE BITUMINOUS CONCRETE PAVEMENT, 40 TYPE IIS, 50 TYPE IIS
100	BASE COURSE, BITUMINOUS CONCRETE PAVEMENT, TYPE IS


NOTE:
1) DESIGN FROST DEPTH - 1170

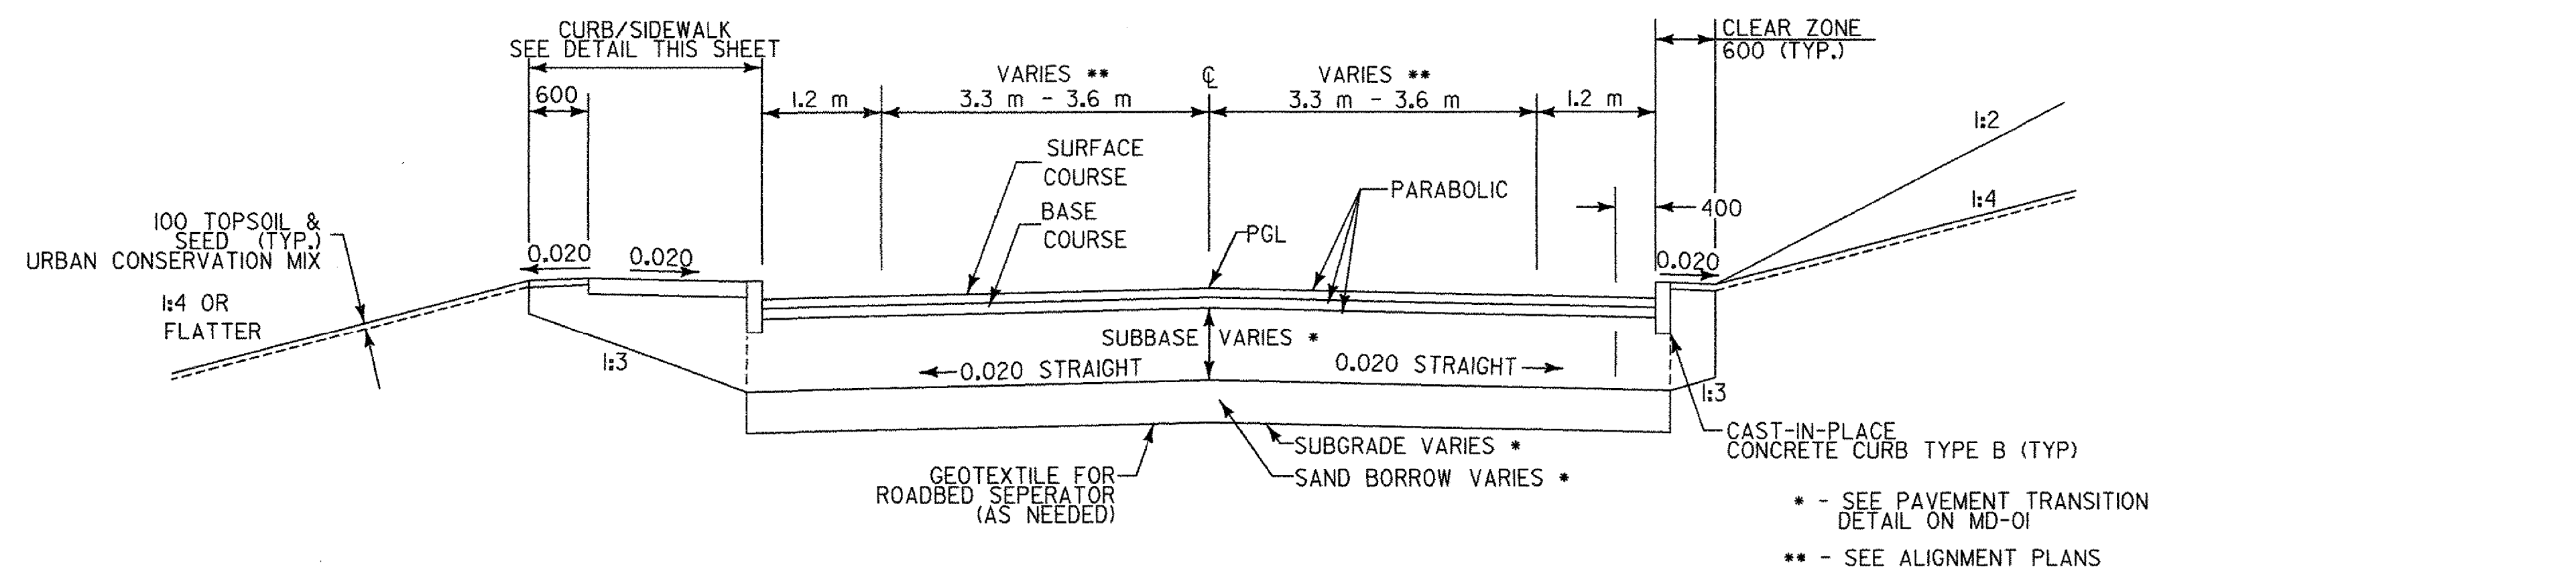


NORMAL SECTION - TWO LANE
STA. VT 1+200 - STA. VT 1+245

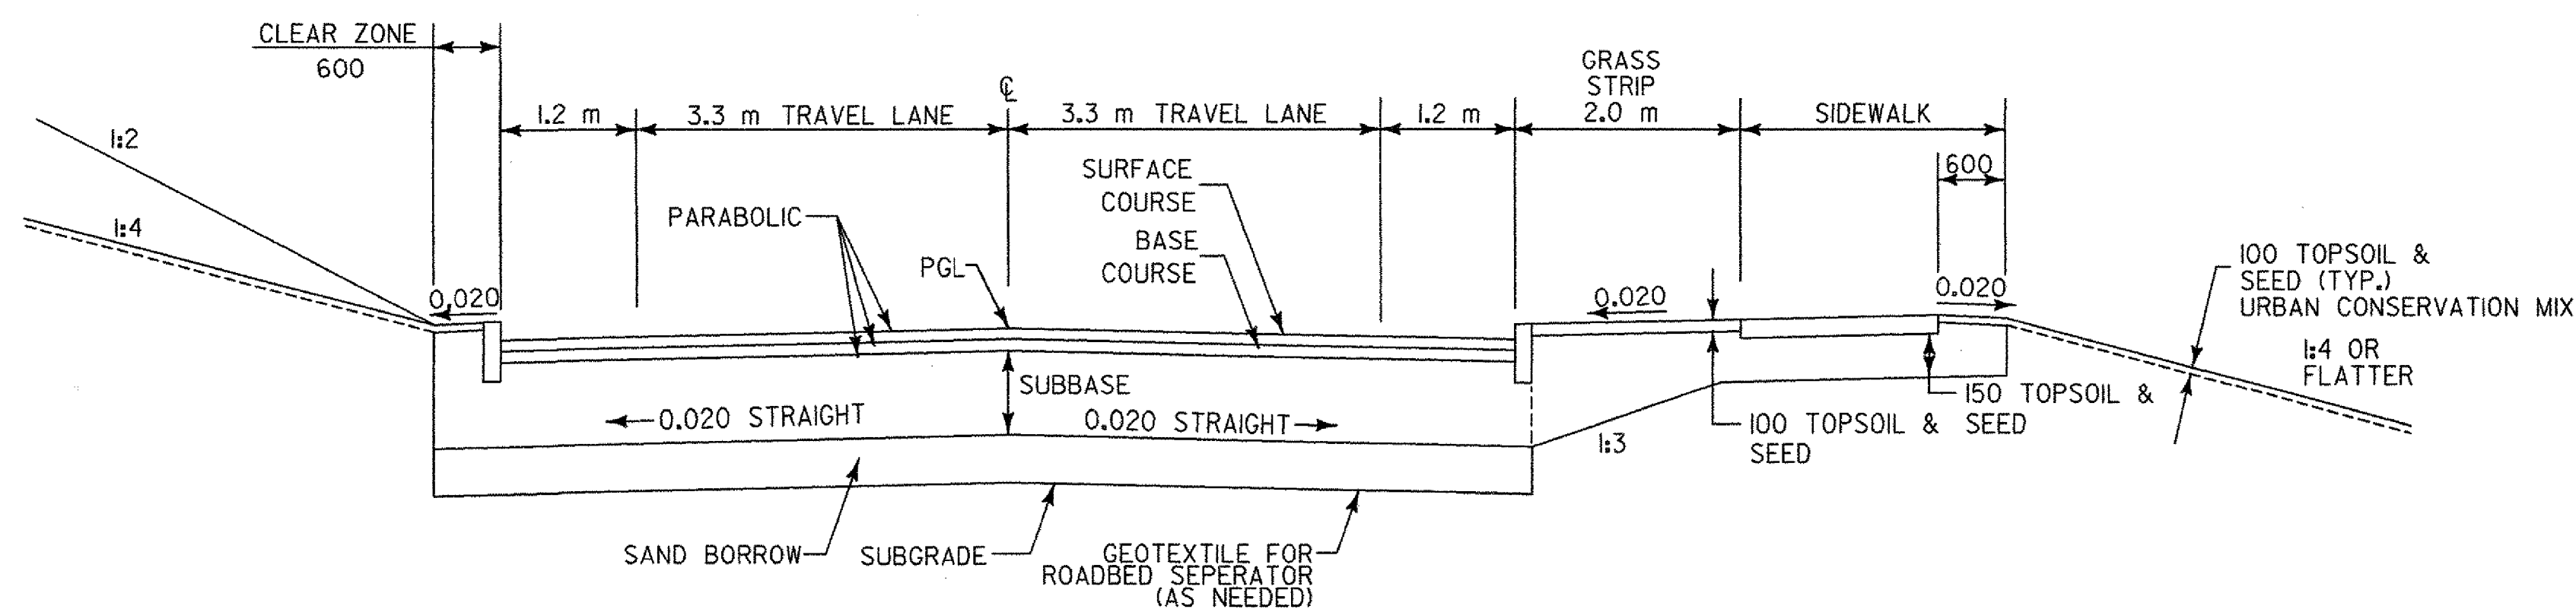

NORMAL SECTION - TWO LANE
STA. VT 1+245 - STA. VT 1+275

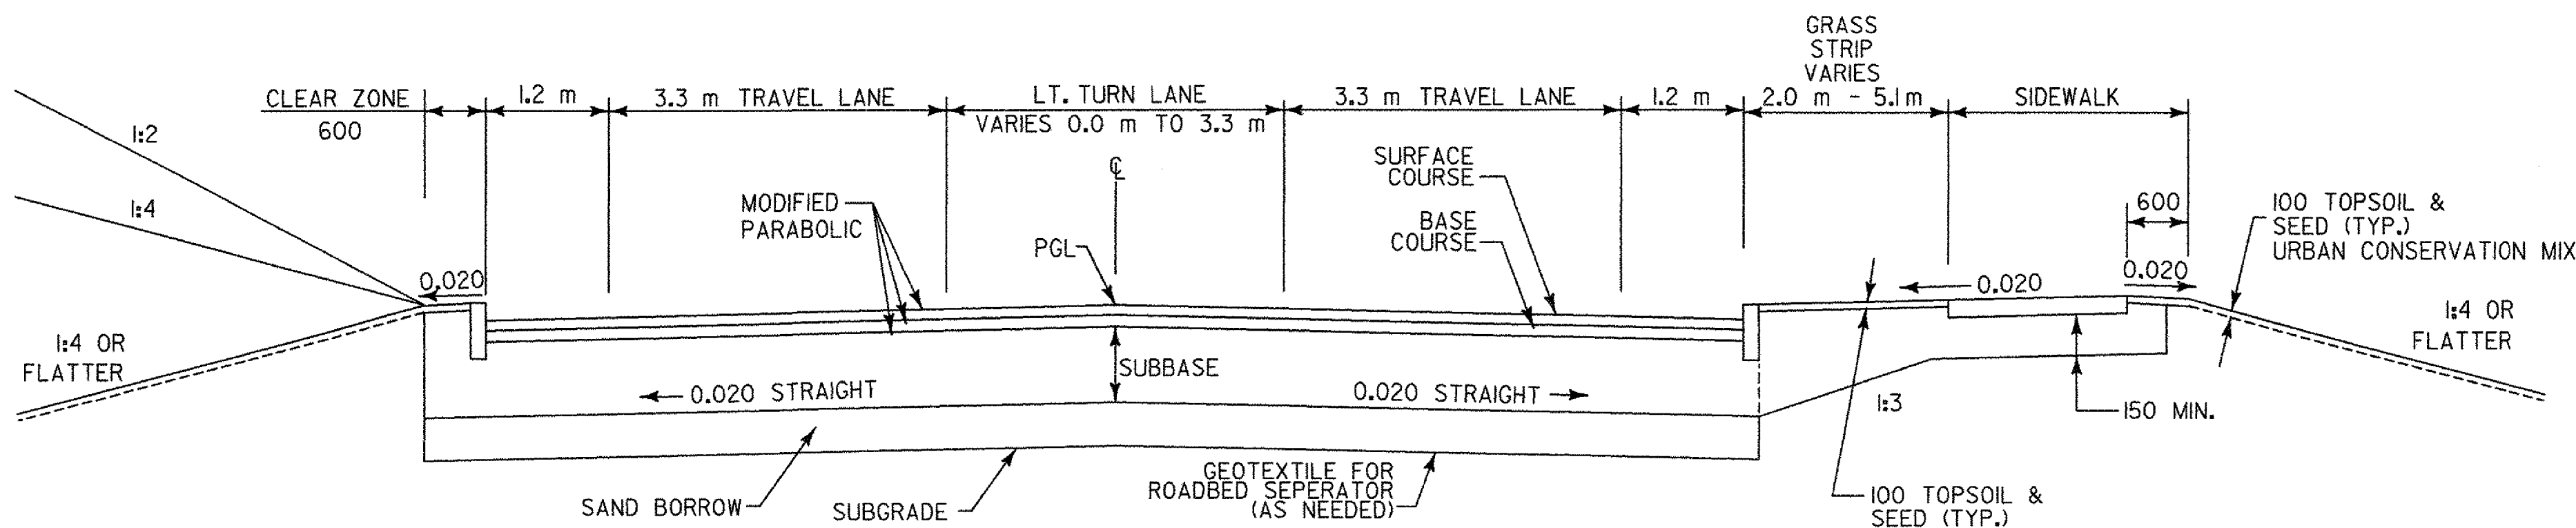

NORMAL SECTION-THREE LANE
STA. VT 1+275 - STA. VT 1+487.5

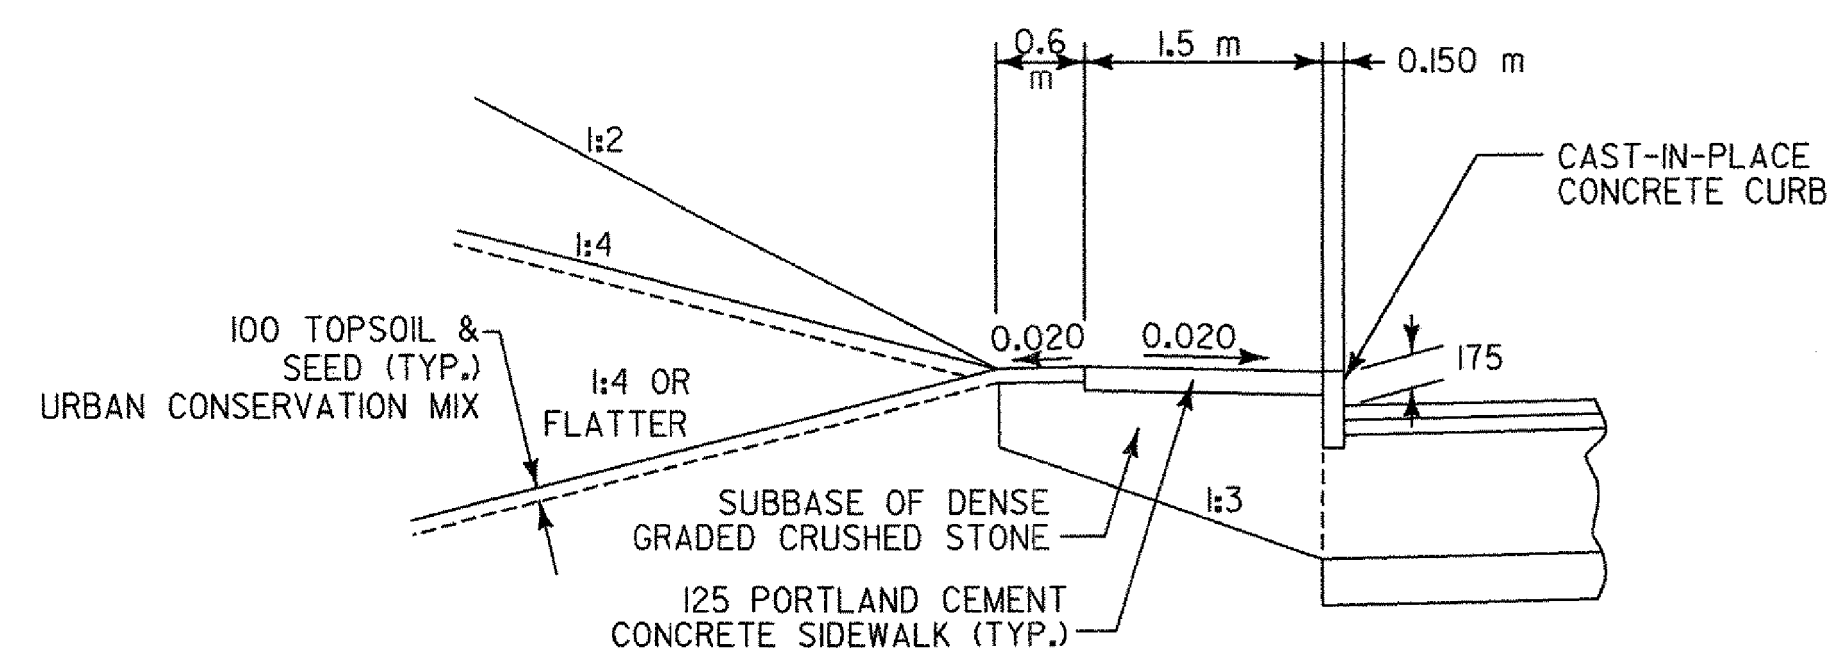

SIDEWALK DETAIL ADJACENT TO CURB
N.T.S.

- NOTES:
- ELIMINATE TOPSOIL AND SEEDING BEHIND GUARDRAIL TO BOTTOM OF SUBBASE CATCH POINT.
 - FOR SLOPES IN SOLID ROCK EXCAVATION AND DRILLING AND BLASTING OF SOLID ROCK SUBGRADE, SEE STD. SHEET A-60 AND A-62 AND DETAILS.
 - REFER TO TYPICAL SECTION SHEET TS-05 FOR SEEDING FORMULA AND ADDITIONAL GENERAL NOTES.
 - SEE BANKING DIAGRAM ON PROFILE SHEETS FOR CROSS SLOPES.
 - EMULSIFIED ASPHALT TO BE APPLIED ON EXISTING PAVEMENT, BETWEEN ALL COURSES OF SUPERPAVE BITUMINOUS CONCRETE PAVEMENT AND ON COLD PLANED SURFACES, AT THE RATE OF 0.068 Kg per m² OR AS DIRECTED BY THE ENGINEER.
 - STABILIZE SLOPES UP TO 1:3 WITH SEED AND MULCH. STEEPER SLOPES TO BE STABILIZED WITH TEMPORARY EROSION MATTING.
 - ANY CONCRETE ROADWAY ENCOUNTERED DURING EXCAVATION TO BE REMOVED. INCIDENTAL TO ITEM 203.16 - SOLID ROCK EXCAVATION.

NOTE: ALL DIMENSIONS, NOTES, AND CALLOUTS ARE IN MILLIMETERS (mm) EXCEPT WHERE NOTED.

VERMONT AGENCY OF TRANSPORTATION



PROJECT NAME: BENNINGTON
PROJECT NUMBER: AC NH 019-(K51)

FILE NAME: ...plot files\zd307d\typ.ppf PLOT DATE: 2/27/2009
DESIGN SUPERVISOR: GREG EDWARDS DRAWN BY: STANTEC
DESIGNED BY: MARC FOISY CHECKED BY: GARY SANTY
TYPICAL SECTIONS TS-03 SHEET 5 OF 367

PGL=PROFILE GRADE LINE

V:\953\active\9530002\transportation\drawing\cont\contract\plot_files\zd307d\typ.ppf