


TYPICAL SECTION - COLD PLANE


MATERIAL ITEM	THICKNESS	TOLERANCE
PAVEMENT COURSES (TOTAL DEPTH)		+/- 5

SHOULDERS:	50	WEARING COURSE, SUPERPAVE BITUMINOUS CONCRETE PAVEMENT (TYPE IIS)
	15	LEVELING COURSE, SUPERPAVE BITUMINOUS CONCRETE PAVEMENT (TYPE IVS)
	50	WEARING COURSE, SUPERPAVE BITUMINOUS CONCRETE PAVEMENT (TYPE IIS)

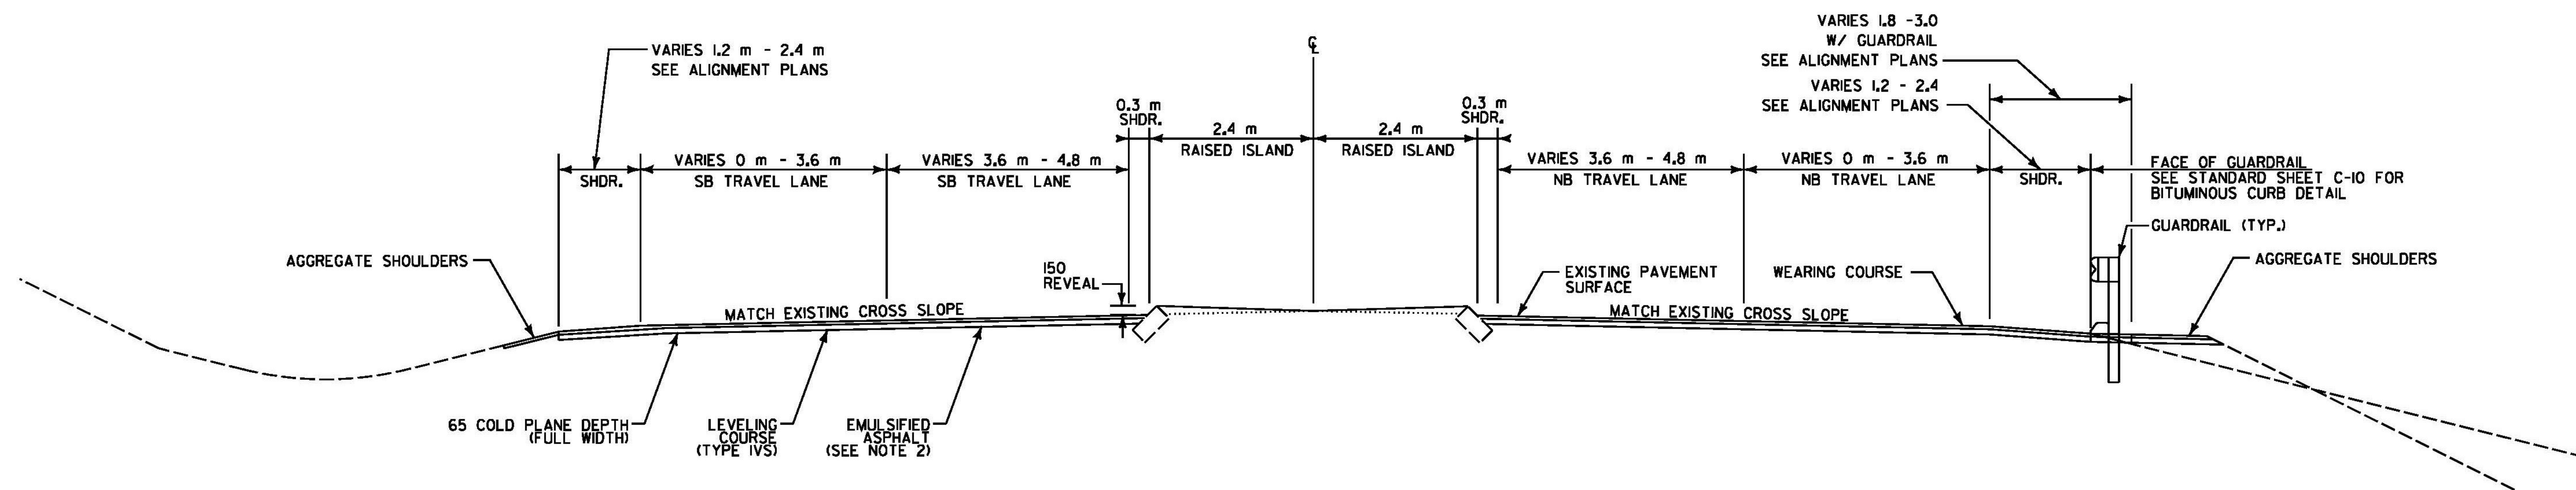

US 7 NORTHBOUND COLD PLANE

N.T.S.

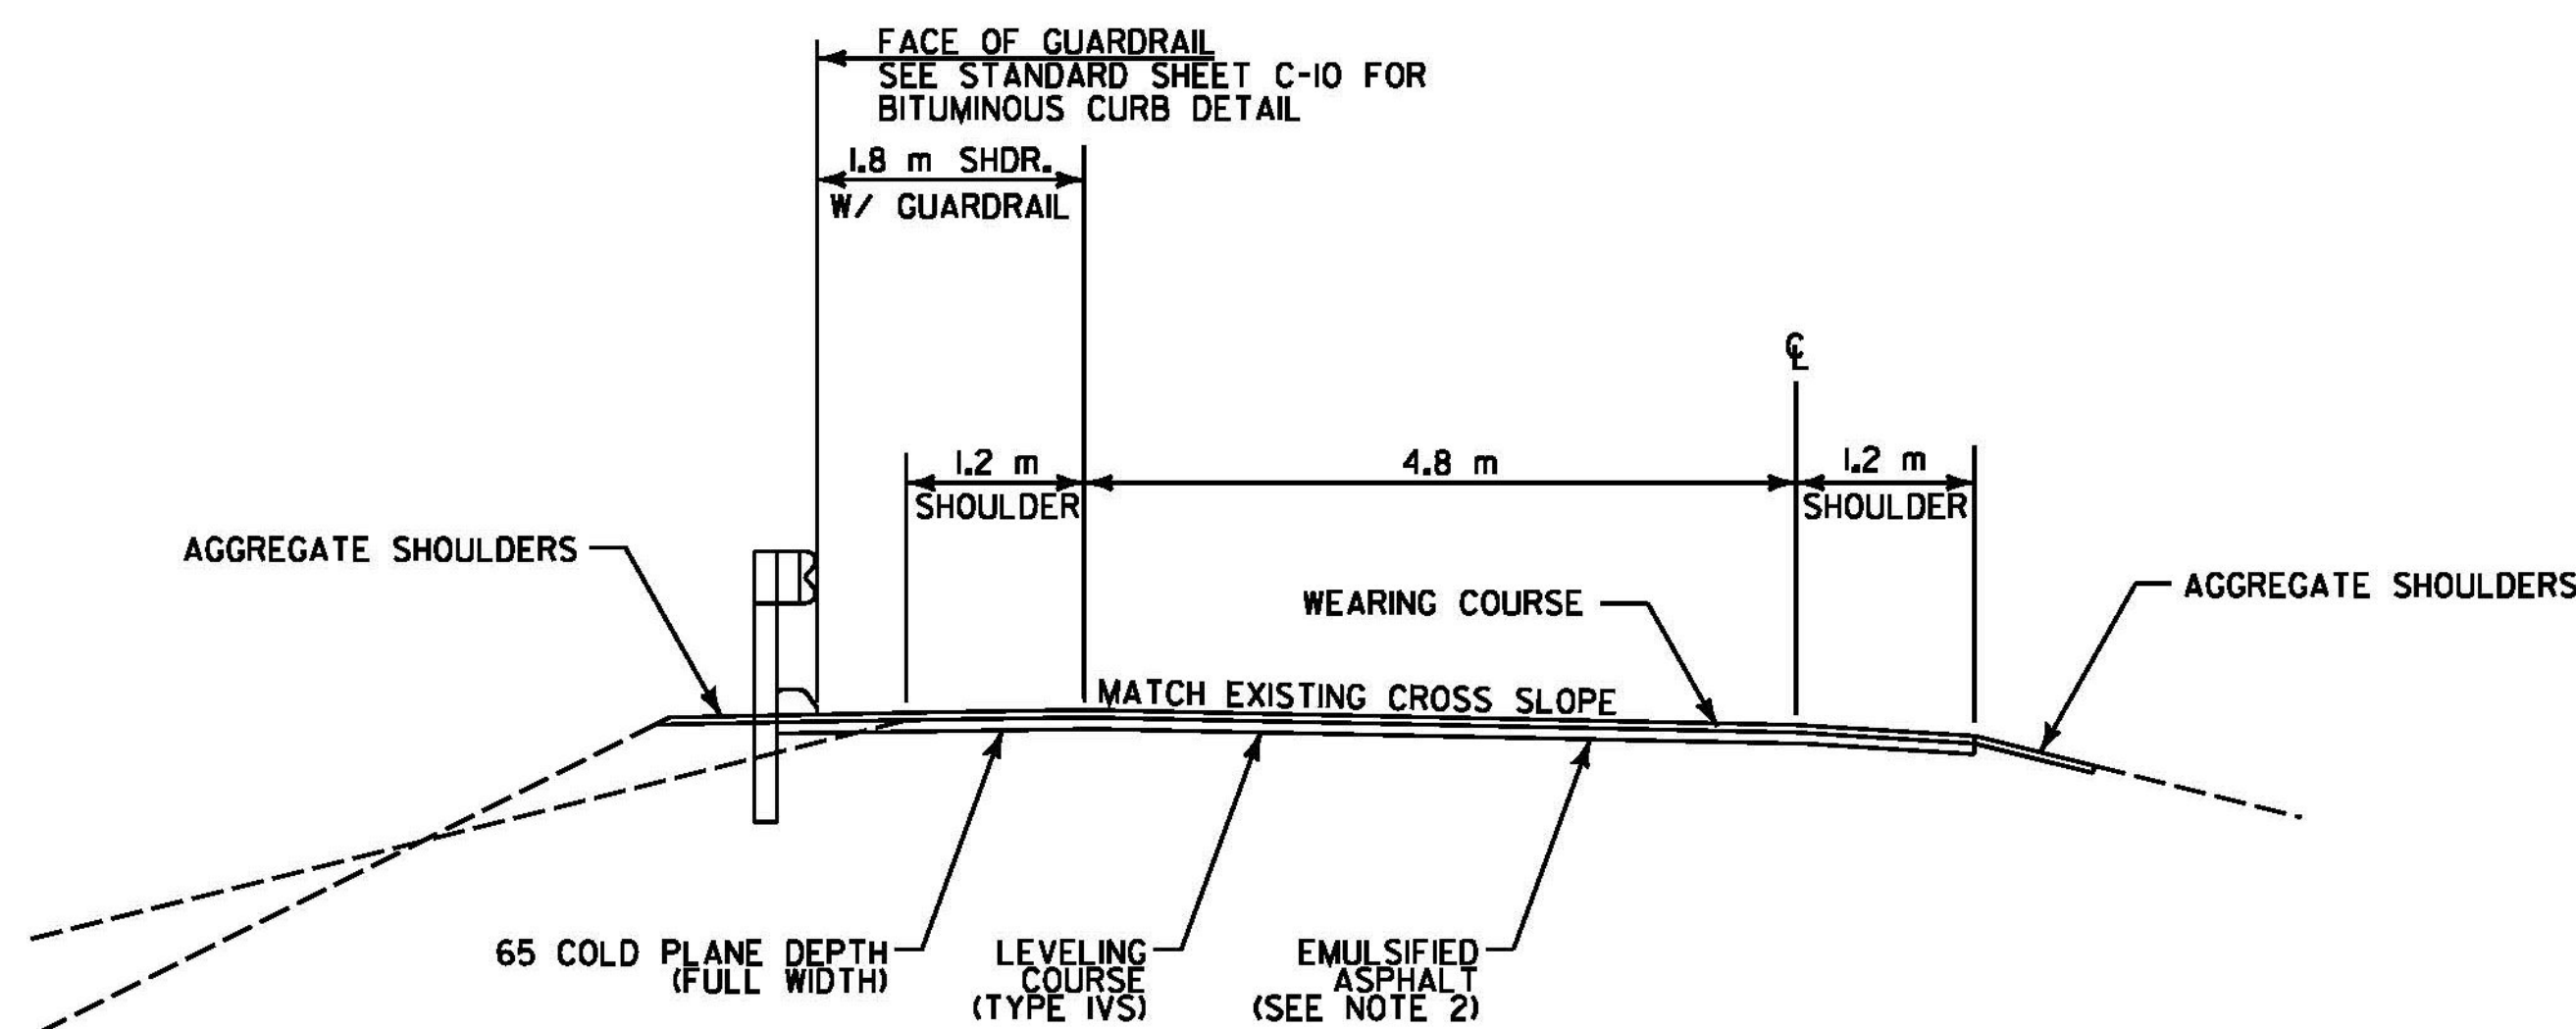

SINGLE LANE COLD PLANE

N.T.S.

NOTE: ALL DIMENSIONS ARE IN MILLIMETERS (mm) EXCEPT WHERE NOTED.

NOTES:

- ANY DIMENSION NOTED AS "VARIES" IS REFERENCED TO ALIGNMENT PLANS/ SECTIONS FOR DETAIL.
- EMULSIFIED ASPHALT TO BE APPLIED ON EXISTING PAVEMENT, BETWEEN ALL COURSES OF SUPERPAVE BITUMINOUS CONCRETE PAVEMENT AND ON COLD PLANED SURFACES, AT THE RATE OF 0.068 L/m² OR AS DIRECTED BY THE ENGINEER.

PGL = PROFILE GRADE LINE



PROJECT NAME: BENNINGTON

PROJECT NUMBER: NH 019-1(54)

FILE NAME: ...\\plot_files\zd307c4typ.ptf

DESIGN SUPERVISOR: GREG EDWARDS

DESIGNED BY: MARC FOISY

TYPICAL SECTIONS TS-05

PLOT DATE: 1/26/2010

DRAWN BY: STANTEC

CHECKED BY: GARY SANTY

SHEET 7 OF 468