



750 FOR ALL SHOULDERS 1.8m OR WIDER, 150 FOR ALL SHOULDERS LESS THAN 1.8m WIDE WITH NO GUARDRAIL. MILLED RUMBLE STRIPS WILL NOT BE REQUIRED IN GUARDRAIL AREAS ADJACENT TO THE 1.2m SHOULDER.

SHOULDER MILLED RUMBLE STRIP DETAIL

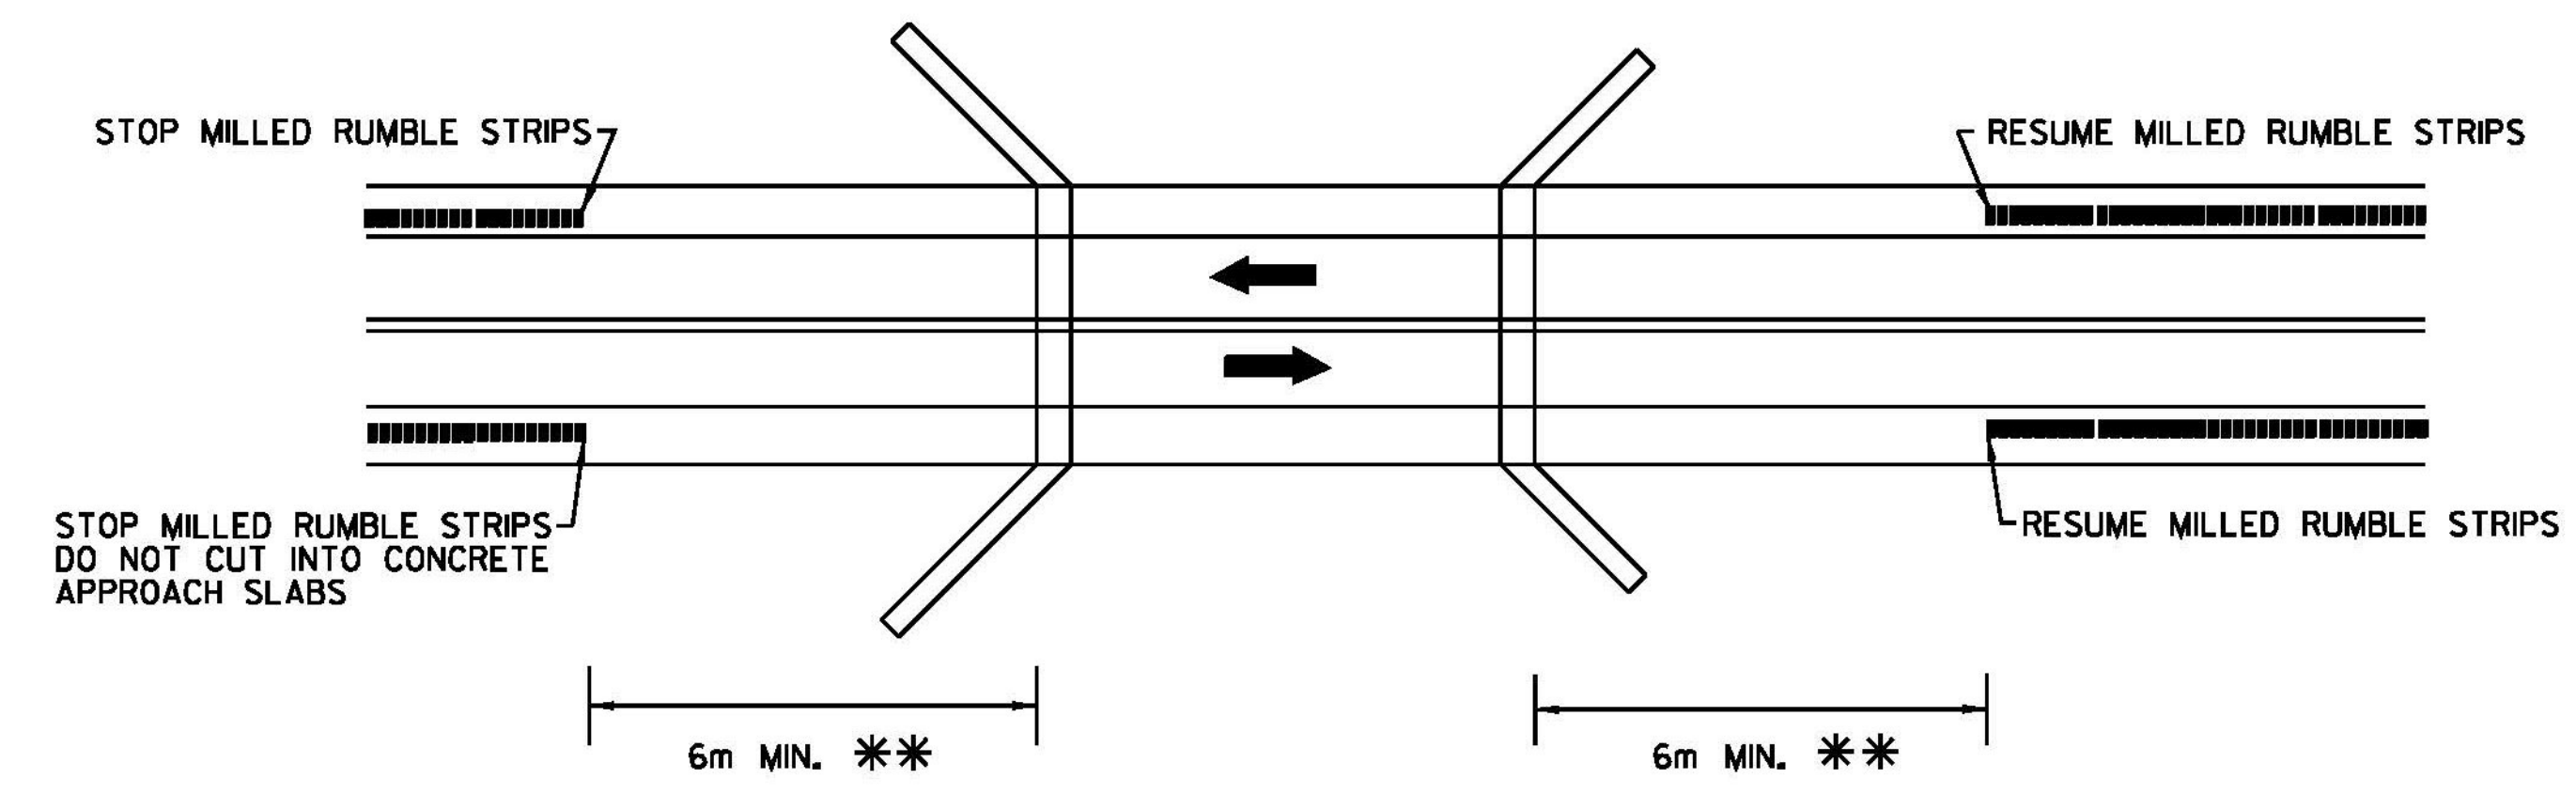


** BRIDGE RAIL WILL DETERMINE MINIMUM DISTANCE IN SOME CASES.

MILLED RUMBLE STRIP BRIDGE DETAIL

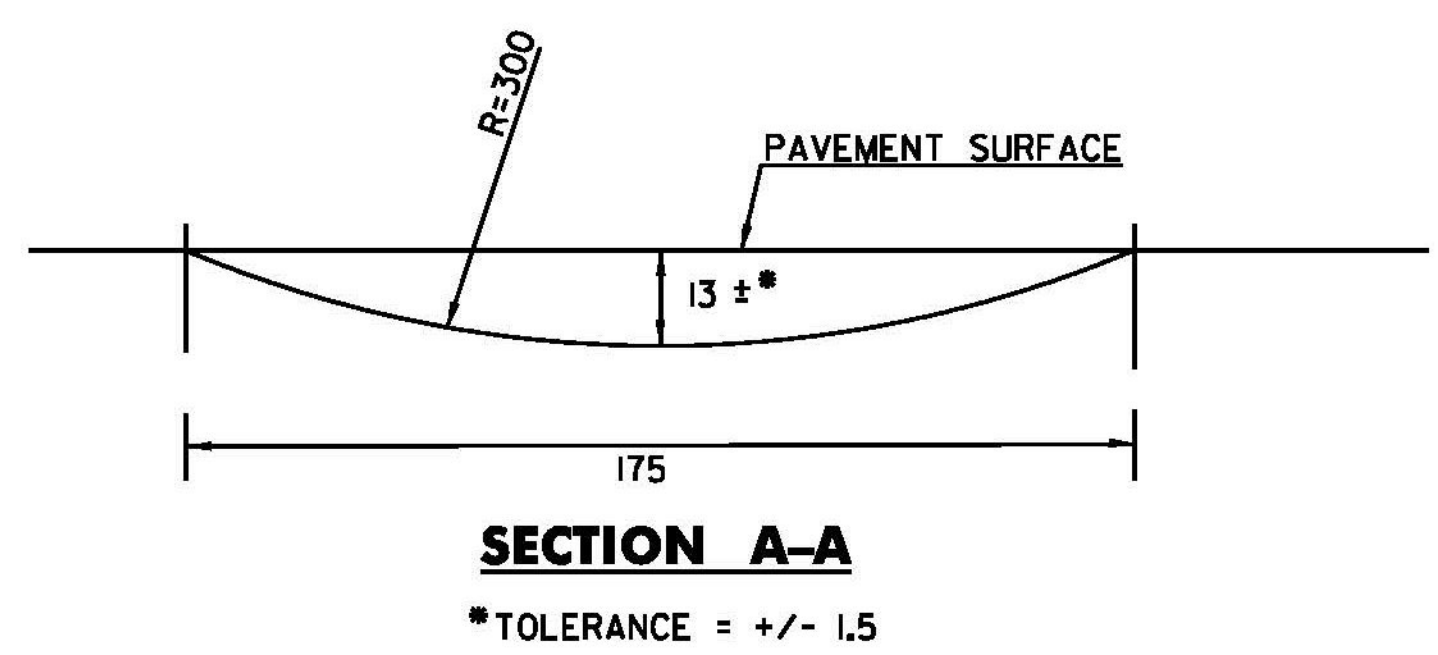


SECTION A-A

* TOLERANCE = +/- 1.5

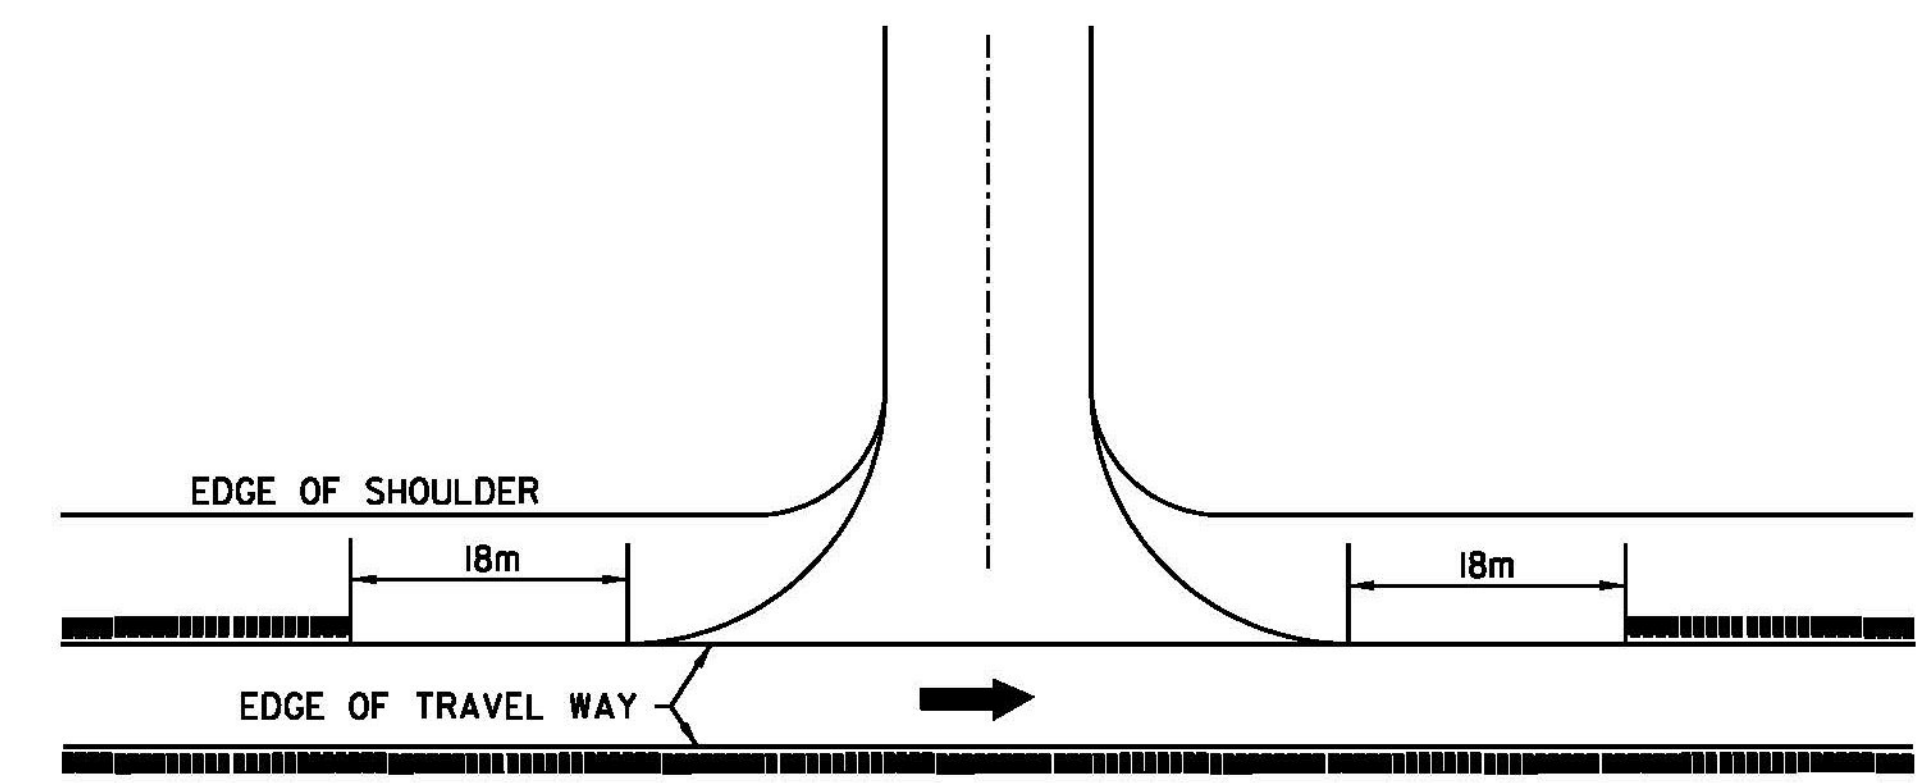

MILLED RUMBLE STRIP U-TURN DETAIL

NOTE: ALL DIMENSIONS, NOTES, AND CALLOUTS ARE IN MILLIMETERS (mm) EXCEPT WHERE NOTED.

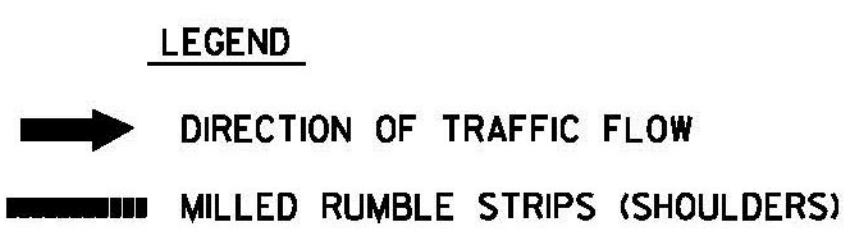

- NOTES:**
- MILLED RUMBLE STRIPS WILL NOT BE REQUIRED IN GUARDRAIL AREAS ADJACENT TO THE 1.2m SHOULDER.
 - SEE SIGNS AND MARKINGS SHEETS FOR MILLED RUMBLE STRIP LOCATIONS.



PROJECT NAME: BENNINGTON	PLOT DATE: 1/26/2010
PROJECT NUMBER: NH 019-1(54)	DRAWN BY: STANTEC
FILE NAME: ..\plot_files\zd307c4typ.ptf	CHECKED BY: GARY SANTY
DESIGN SUPERVISOR: GREG EDWARDS	SHEET 29 OF 468
DESIGNED BY: MARC FOISY	
MISCELLANEOUS DETAILS MD-02	

1/26/2010 4:46:14 PM V:\953\active\953002\transport\at\gn\grom\mg\cont\tr\act_4\blot_files\zd307c4typ.ptf