


LOCATION				FEET OF DITCHING				MISC. ITEMS			REMARKS
SITE	STATION	STATION	POS.	PERCENT GRADE				653.20	613.10	649.31	
				0-1	1-2.5	2.5-10	>10	TEMP. EROS. MATT.	STONE FILL TYP. I	GEOT. UNDER STONE FILL	
VT ROUTE 102, MAIDSTONE DISTRICT #7								SY	CY	SY	
1	149+42	150+23	LT		81			36			
2	152+27	157+50	LT		523			232			
3	161+00	170+75	LT	325	375	275		167	41	183	
4	175+75	187+00	LT	375	125	625		56	92	417	
5	193+50	196+50	RT			300			44	200	
6	204+00	213+65	LT	665	300			133			
7	216+30	218+30	LT		200			89			
8	306+00	316+00	LT			1,000			148	667	
9	333+50	344+00	LT	750	300			133			
10	346+00	361+00	LT	400	700	400		311	59	267	
11	362+50	368+25	LT	75	150	350		67	52	233	
12	369+00	378+00	LT		200	700		89	104	467	
VT ROUTE 102, BRUNSWICK DISTRICT #9											
13	0+30	3+25	LT		295			131			
14	38+50	48+75	LT	1,025							
15	56+50	64+00	LT	750							
16	70+75	72+80	LT	205							
17	103+00	105+00	LT			200			30	133	
18	150+00	152+00	LT	200							
19	157+25	158+75	LT	150							
20	191+00	199+00	LT		200	600		89	89	400	
21	203+50	205+20	LT			170			25	113	
22	210+00	212+25	LT	225							
23	217+50	220+00	LT		250				111		
24	225+75	231+50	LT		575				256		
25	232+75	234+40	RT	165							
26	237+00	250+75	LT	1,075	300			133			
27	256+50	259+00	LT			250			37	167	
28	265+00	273+40	LT	840							
29	328+75	330+00	LT		125				56		
30	332+00	335+00	LT	300							
31	339+60	342+50	RT			290			43	193	
PROJECT SUBTOTALS				7,525	4,699	5,160		2,089	764	3,440	
ROUNDING				225	101	140		11	16	160	
PROJECT TOTALS				7,750	4,800	5,300		2,100	780	3,600	

LOCATION				FEET OF DITCHING				MISC. ITEMS			REMARKS
SITE	STATION	STATION	POS.	PERCENT GRADE				653.20	613.10	649.31	
				0-1	1-2.5	2.5-10	>10	TEMP. EROS. MATT.	STONE FILL TYP. I	GEOT. UNDER STONE FILL	

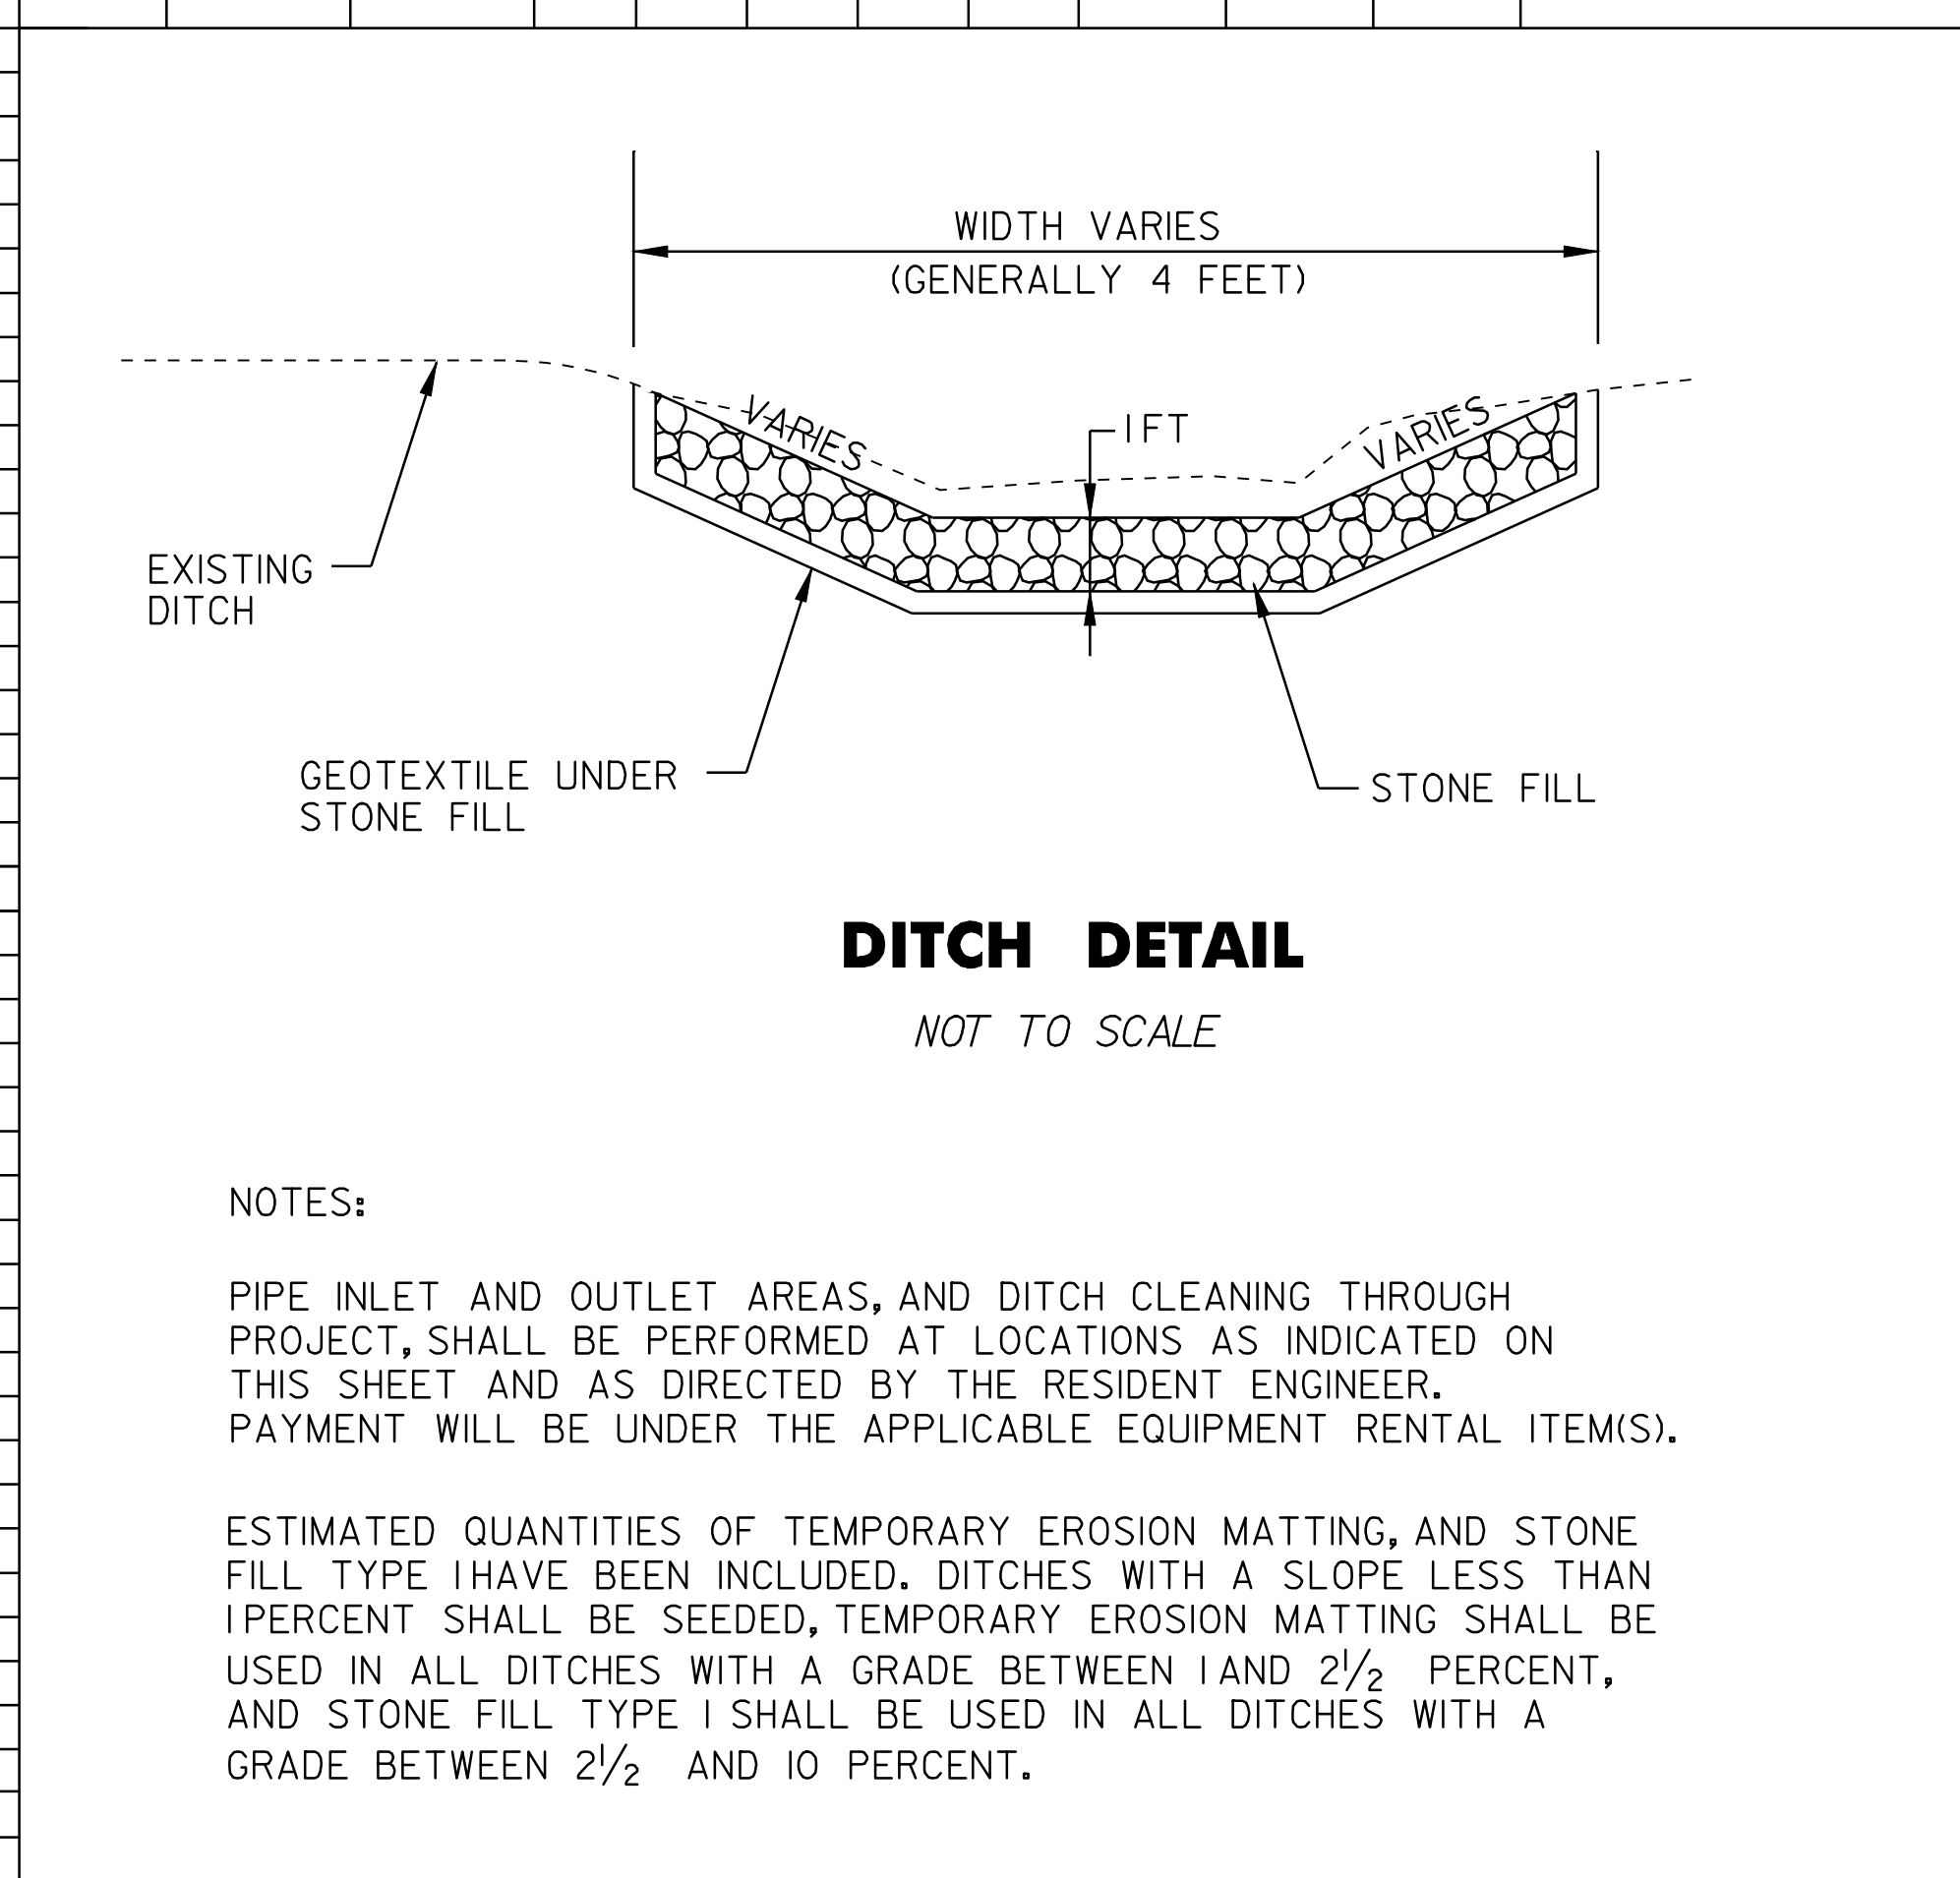

NOTES:

PIPE INLET AND OUTLET AREAS, AND DITCH CLEANING THROUGH PROJECT, SHALL BE PERFORMED AT LOCATIONS AS INDICATED ON THIS SHEET AND AS DIRECTED BY THE RESIDENT ENGINEER. PAYMENT WILL BE UNDER THE APPLICABLE EQUIPMENT RENTAL ITEM(S).

ESTIMATED QUANTITIES OF TEMPORARY EROSION MATTING, AND STONE FILL TYPE I HAVE BEEN INCLUDED. DITCHES WITH A SLOPE LESS THAN 1 PERCENT SHALL BE SEEDDED, TEMPORARY EROSION MATTING SHALL BE USED IN ALL DITCHES WITH A GRADE BETWEEN 1 AND 2½ PERCENT, AND STONE FILL TYPE I SHALL BE USED IN ALL DITCHES WITH A GRADE BETWEEN 2½ AND 10 PERCENT.

DITCH CLEANING DETAIL SHEET	PROJECT : MAIDSTONE - BLOOMFIELD	PROJECT NO. : STP 2609(1)S
	DESIGN FILE NAME: 06c042.dgn	
	IPARM FILE NAME: 06c042d1t-1	PLOT DATE: 24-AUG-2009
	SURVEYED BY: BCE/PJM	SURVEY DATE: 9-06
	SQUAD LEADER: BCE	DRAWN BY: C.E.A., INC.
	SHEET: 10 OF 40	