



NOTES

1. THE WEARING COURSE SHALL BE TYPE IVS SUPERPAVE BITUMINOUS CONCRETE PAVEMENT. LEVELING COURSE SHALL BE TYPE IVS SUPERPAVE BITUMINOUS CONCRETE PAVEMENT.
2. EMULSIFIED ASPHALT SHALL BE APPLIED ON ALL EXISTING PAVEMENT SURFACES, BETWEEN ALL COURSES OF PAVEMENT AND ON COLD PLANED SURFACES AT THE RATE OF 0.025 GAL/SY OR AS DIRECTED BY THE RESIDENT ENGINEER.
3. SUPERPAVE BITUMINOUS CONCRETE PAVEMENT TOLERANCE = +/- 1/4" (TOTAL PAVEMENT THICKNESS EXCLUDING LEVELING).
4. COLD PLANING SHALL BE COMPLETED AS NOTED ON THE PLANS OR AS DIRECTED BY THE RESIDENT ENGINEER.
5. ALL DRIVES, AND GRAVEL PULLOUTS SHALL RECEIVE A 4' PAVED APRON AS DIRECTED BY THE RESIDENT ENGINEER. ALL DRIVEWAYS LOCATED IN AREAS THAT HAVE SIDEWALKS SHALL BE PAVED TO THE EXISTING EDGE OF SIDEWALK AS DIRECTED BY THE RESIDENT ENGINEER. ANY AND ALL REQUIRED EXCAVATION OR GRADING IN DRIVE AREAS SHALL BE AS DIRECTED AND WILL BE PAID FOR UNDER THE APPLICABLE RENTAL ITEM(S). IF REQUIRED, A NEW DRIVEWAY SUBBASE SHALL BE CONSTRUCTED AND WILL BE PAID FOR UNDER ITEM 301.28 SUBBASE OF CRUSHED GRAVEL, FINE GRADED. A BITUMINOUS SURFACE SHALL BE CONSTRUCTED AS DIRECTED AND WILL BE PAID FOR UNDER ITEM 900.675 SPECIAL PROVISION (HAND-PLACED BITUMINOUS CONCRETE MATERIAL, DRIVES). ESTIMATED QUANTITIES OF THE ABOVE ITEMS HAVE BEEN INCLUDED TO PAY FOR THIS WORK.
6. AN ESTIMATED QUANTITY OF ITEM 619.17 YIELDING MARKER POSTS HAS BEEN INCLUDED TO DELINEATE PIPE INLETS, PIPE OUTLETS AND DROP INLETS LOCATED OUTSIDE OF THE PAVEMENT SURFACE OR AS DIRECTED BY THE RESIDENT ENGINEER.

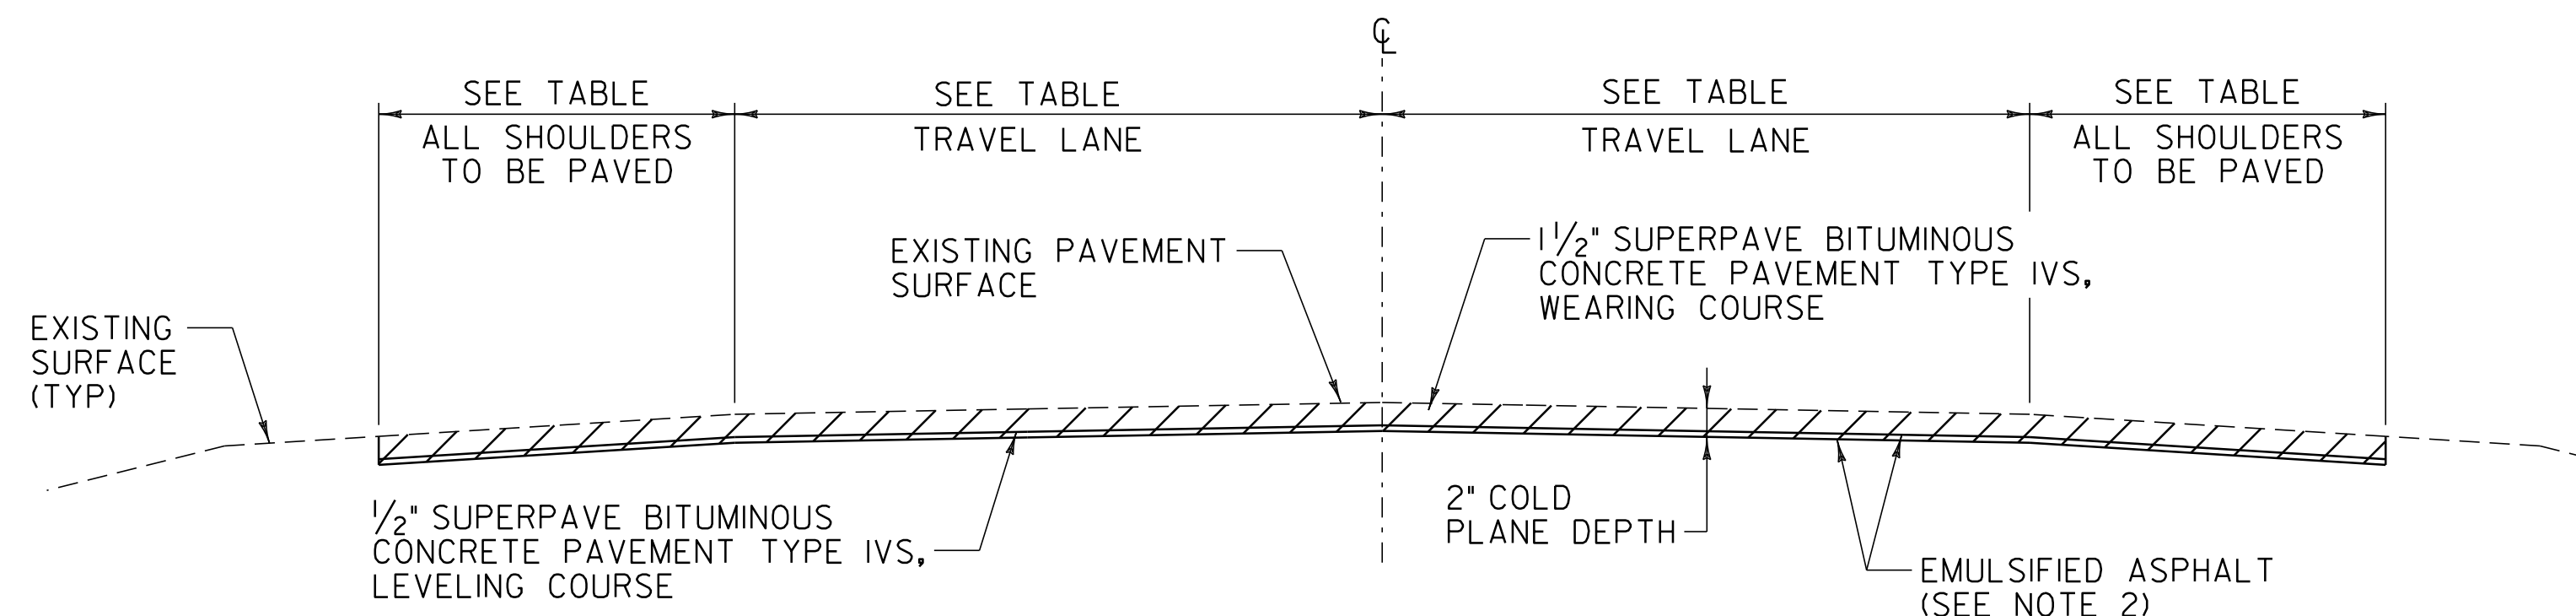

COLD PLANE TYPICAL SECTION

VT. ROUTE 4A FAIR HAVEN STA 49+36.80 TO FAIR HAVEN STA 65+00.00
 VT. ROUTE 4A FAIR HAVEN STA 78+80.00 TO FAIR HAVEN STA 79+76.00
 VT. ROUTE 4A FAIR HAVEN STA 80+30.00 TO FAIR HAVEN STA 81+00.00
 VT. ROUTE 4A FAIR HAVEN STA 127+50.00 TO FAIR HAVEN STA 130+36.32

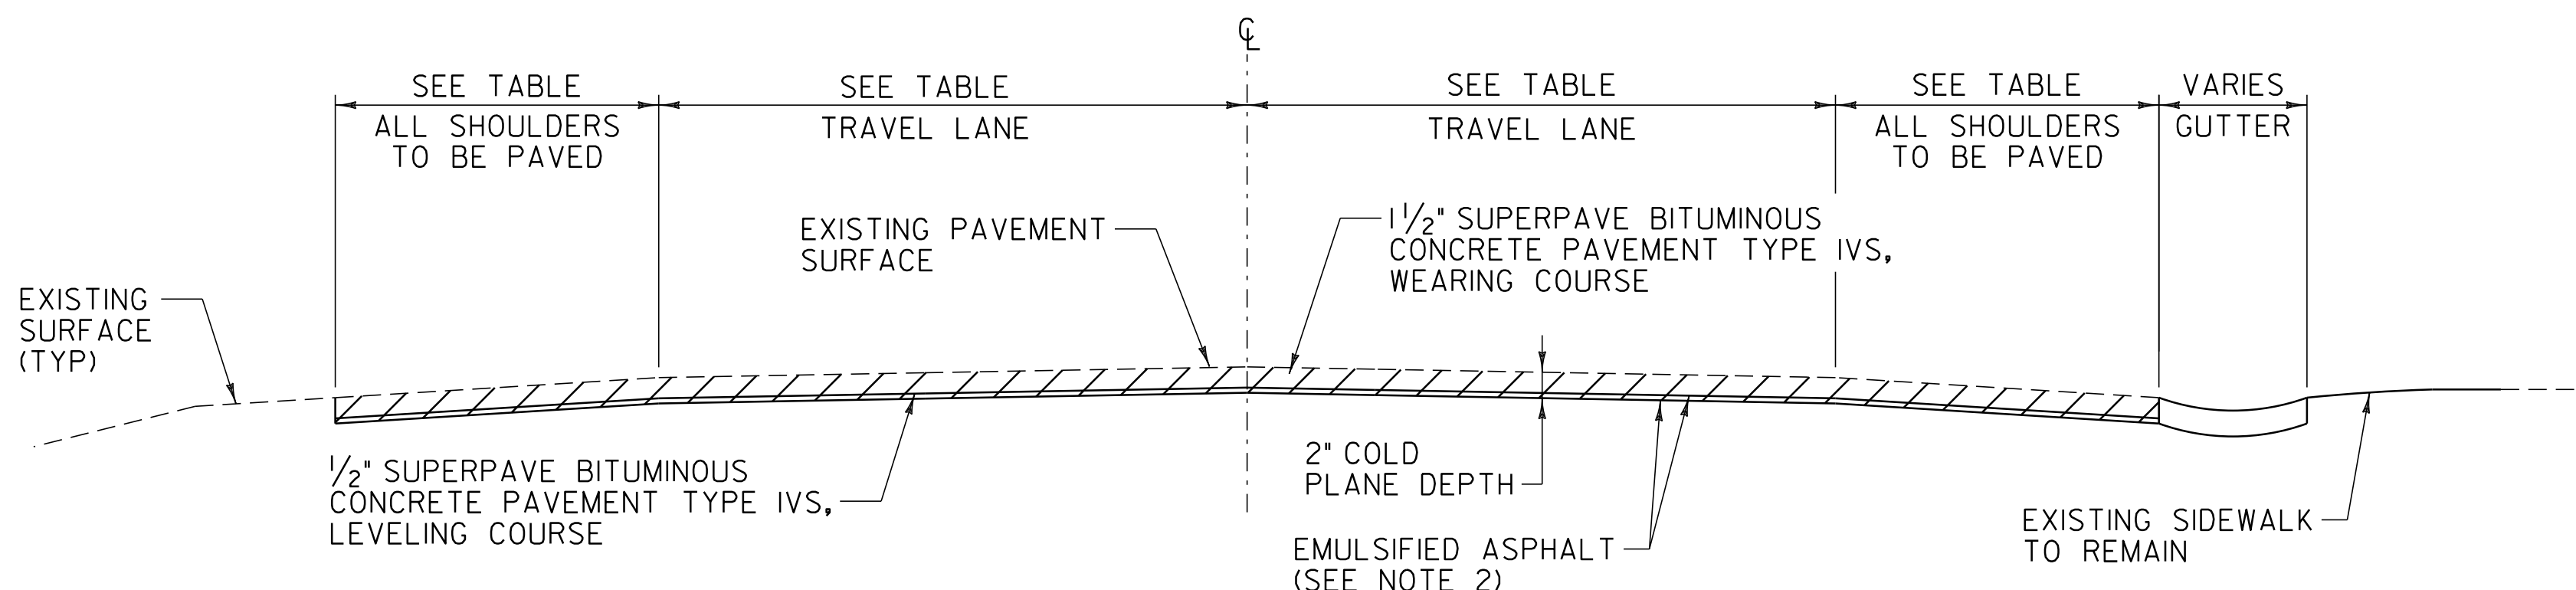

COLD PLANE TYPICAL SECTION

VT. ROUTE 4A FAIR HAVEN STA 65+00.00 TO FAIR HAVEN STA 78+80.00
 VT. ROUTE 4A FAIR HAVEN STA 81+00.00 TO FAIR HAVEN STA 83+34.00

PROJECT PAVING LIMITS

TOWN & ROUTE	BEGIN STATION	END STATION	LANE TYPICAL	WEARING DEPTH	LEVELING TON	NOTES
FAIR HAVEN:						
VT. ROUTE 4A	49+36.80	52+50.00	3'-0" - 11'-0" - 11'-0" - 3'-0"	1 1/2"	30	COLD PLANE 2", LEVEL 1/2" TYPE IVS & PAVE 1/2" TYPE IVS
VT. ROUTE 4A	52+50.00	55+50.00	3'-0" - 11'-0" - 11'-0" - 6'-0"	1 1/2"	29	COLD PLANE 2", LEVEL 1/2" TYPE IVS & PAVE 1/2" TYPE IVS
VT. ROUTE 4A	55+50.00	65+00.00	3'-0" - 11'-0" - 11'-0" - 3'-0"	1 1/2"	89	COLD PLANE 2", LEVEL 1/2" TYPE IVS & PAVE 1/2" TYPE IVS
VT. ROUTE 4A	65+00.00	78+80.00	4'-0" - 11'-0" - 11'-0" - 4'-0"	1 1/2"	134	COLD PLANE 2", LEVEL 1/2" TYPE IVS & PAVE 1/2" TYPE IVS
VT. ROUTE 4A	78+80.00	79+76.00	4'-0" - 11'-0" - 11'-0" - 4'-0"	1 1/2"	10	COLD PLANE 2", LEVEL 1/2" TYPE IVS & PAVE 1/2" TYPE IVS
VT. ROUTE 4A	79+76.00	80+30.00	7'-0" - 11'-0" - 11'-0" - 2'-0"	1 1/4"	-	BR I COLD PLANE 1 1/4" & PAVE 1 1/4" TYPE IVS
VT. ROUTE 4A	80+30.00	85+25.00	VARIES - SEE LAYOUT	1 1/2"	8	COLD PLANE 2", LEVEL 1/2" TYPE IVS & PAVE 1/2" TYPE IVS
VT. ROUTE 4A	85+25.00	87+50.00	VARIES - SEE LAYOUT	1 1/2"	27	COLD PLANE 2", LEVEL 1/2" TYPE IVS & PAVE 1/2" TYPE IVS
VT. ROUTE 4A	87+50.00	90+90.00	VARIES - SEE LAYOUT	1 1/2"	52	COLD PLANE 2", LEVEL 1/2" TYPE IVS & PAVE 1/2" TYPE IVS
VT. ROUTE 4A	90+90.00	97+91.00	VARIES - SEE LAYOUT	1 1/2"	113	COLD PLANE 2", LEVEL 1/2" TYPE IVS & PAVE 1/2" TYPE IVS
VT. ROUTE 4A	97+91.00	117+00.00	10'-0" - 12'-0" - 12'-0" - 10'-0"	1 1/2"	151	COLD PLANE 2", LEVEL 1/2" TYPE IVS & PAVE 1/2" TYPE IVS
VT. ROUTE 4A	117+00.00	119+50.00	VARIES - SEE LAYOUT	1 1/2"	272	COLD PLANE 2", LEVEL 1/2" TYPE IVS & PAVE 1/2" TYPE IVS
VT. ROUTE 4A	119+50.00	127+50.00	10'-0" - 12'-0" - 12'-0" - 10'-0"	1 1/2"	13	COLD PLANE 2", LEVEL 1/2" TYPE IVS & PAVE 1/2" TYPE IVS
VT. ROUTE 4A	127+50.00	130+36.32	VARIES - SEE LAYOUT	1 1/2"	127	COLD PLANE 2", LEVEL 1/2" TYPE IVS & PAVE 1/2" TYPE IVS

CONSERVATION SEED MIX
RURAL AREA - SEED MIXTURE

% WT.	LBS./A.	NAME	PUR. %	GERM. %
37.5	22.5	CREEPING RED FESCUE	98	85
37.5	22.5	TALL FESCUE	95	90
5.0	3.0	RED TOP	95	90
15.0	9.0	BIRDSFOOT TREFOIL	98	85
5.0	3.0	ANNUAL RYEGRASS	95	85
100.0	60.0			

SEED MIXTURE:
SHALL NOT HAVE A WEED CONTENT EXCEEDING 0.40% BY WEIGHT AND SHALL BE FREE OF ALL NOXIOUS WEED SEED.

SEED:
TO BE APPLIED PER SEEDING FORMULA OR AS DIRECTED BY THE RESIDENT ENGINEER.

FERTILIZER:
FORMULA 10-20-10 TO BE USED WITH SEED APPLIED AT THE RATE OF 500 LBS/ACRE (HYDRO SEEDERS MAY USE 19-19-19 FORMULA).

AGRICULTURAL LIMESTONE:
TO BE APPLIED AT THE RATE OF 2 TONS/ACRE OR AS DIRECTED BY THE RESIDENT ENGINEER.

TOPSOIL:
TO BE USED WITH SEED AS INDICATED ON THE PLANS OR AS DIRECTED BY THE RESIDENT ENGINEER.

PROJECT TYPICAL SHEET #1

PROJECT NAME: FAIR HAVEN	PLOT DATE: 22-FEB-2012 12:55
PROJECT NUMBER: STP 2615(1)S	DRAWN BY: C.A.K.
FILE NAME: p06c058.dgn	CHECKED BY: D.E.G.
PROJECT LEADER: D.E.G.	SHEET 81 OF 157
DESIGNED BY: M.J.M.	
IPARM FILE: p06c060p+s01.i	

NOT TO SCALE